

Interface module - VIP-3/PT/D37SUB/F/LED - 2904266

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with push-in connections and D-SUB socket strip, for mounting on NS 35 rails, with LED, 37-pos.

The figure shows the 37-pos. version with D-SUB plug.

Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 813433

Technical data

Dimensions

Width	72.3 mm
Height	75.8 mm
Depth	63 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Max. perm. operating voltage	24 V DC
Max. perm. current (per branch)	2 A
Number of positions	37
Status display	LED
Mounting position	any
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Rated surge voltage	1.2 kV
Degree of pollution	2
Overvoltage category	II

Connection data for connection 1

Interface module - VIP-3/PT/D37SUB/F/LED - 2904266

Technical data

Connection data for connection 1

Connection name	Field level
Connection method	Push-in connection
Stripping length	8 mm
Conductor cross section solid	0.14 mm² ... 2.5 mm²
Conductor cross section flexible	0.14 mm² ... 2.5 mm²
Conductor cross section AWG	26 ... 14

Connection data for connection 2

Connection name	Controller level
Connection method	D-SUB socket strip
Number of connections	1
Number of positions	37

Standards and Regulations

Connection in acc. with standard	CSA
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Degree of pollution	2
Overvoltage category	II

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242608
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152

ETIM

ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC002780

UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421

Interface module - VIP-3/PT/D37SUB/F/LED - 2904266

Classifications

UNSPSC

UNSPSC 13.2	39121421
-------------	----------

Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / EAC / EAC / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

CSA 	
mm²/AWG/kcmil	26-14
Nominal current I _N	2 A
Nominal voltage U _N	24 V

UL Recognized 	
mm²/AWG/kcmil	26-14
Nominal current I _N	2 A
Nominal voltage U _N	24 V

cUL Recognized 	
mm²/AWG/kcmil	26-14
Nominal current I _N	2 A
Nominal voltage U _N	24 V

Interface module - VIP-3/PT/D37SUB/F/LED - 2904266

Approvals


EAC

EAC

cULus Recognized **cULus**

Drawings

Circuit diagram

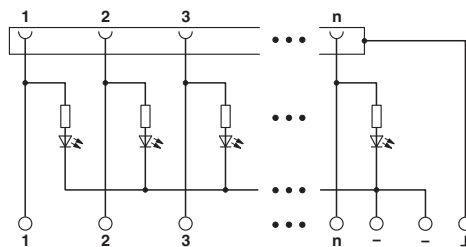

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>