

Interface module - UM 45-FLK40 - 2962609

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with screw connection and flat-ribbon cable connector, for assembly on NS 35/7.5, 40 positions

The illustration shows a 34-position version



Key Commercial Data

Packing unit	1 STK
GTIN	 4 017918 087272

Technical data

Dimensions

Width	126 mm
Height	45 mm
Depth	50 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Max. perm. operating voltage	25 V AC
	60 V DC
Max. perm. current (per branch)	1 A
Number of positions	40
Mounting position	any
Standards/regulations	IEC 60664
	DIN VDE 0110
Degree of pollution	2
Overvoltage category	II

Interface module - UM 45-FLK40 - 2962609

Technical data

Connection data for connection 1

Connection name	Field level
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	6 mm
Screw thread	M3
Conductor cross section solid	0.14 mm² ... 1.5 mm²
Conductor cross section flexible	0.14 mm² ... 1.5 mm²
Conductor cross section AWG	26 ... 16

Standards and Regulations

Connection in acc. with standard	CUL
Standards/regulations	IEC 60664
	DIN VDE 0110
Degree of pollution	2
Overvoltage category	II

Classifications

eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 6.0	27242608
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152

ETIM

ETIM 2.0	EC001434
ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC002780

UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

Approvals

Approvals

Interface module - UM 45-FLK40 - 2962609

Approvals

Approvals

UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

Approvals submitted

Approval details


UL Recognized 	
Nominal current IN	1 A
Nominal voltage UN	125 V

cUL Recognized 	
Nominal current IN	1 A
Nominal voltage UN	125 V

EAC

cULus Recognized 
--

Drawings

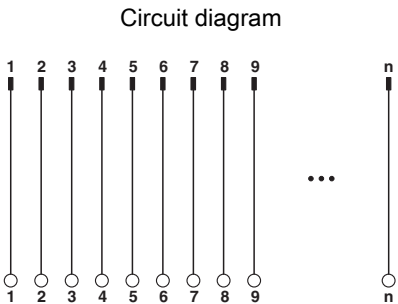

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>