

Ferrule - Al-WM 0,75-8 GY - 3240543

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Ferrule with insulating collar that can be labeled. When using the magazine, the ferrules can be labeled with BLUEMARK.

Why buy this product

- Corresponding crimping pliers from the TOOL fox tool range can be found in the CLIPLINE catalog, part 2
- Ferrules can be labeled with BLUEMARK
- Crimping and marking in one step
- Highly resistant and optimum printing quality thanks to modern UV printing technology
- Electrogalvanized
- Ferrules made from electrolytic copper

Key Commercial Data

Packing unit	780 STK
Minimum order quantity	780 STK
GTIN	 4 046356 528139

Technical data

Dimensions

Length (b)	29 mm
Width (a)	4.6 mm
Sleeve length	8 mm
Inner dimension of the insulating collar (d)	2.9 mm
Ferrule diameter	1.6 mm
Sleeve wall thickness	0.15 mm
Inner diameter (f)	1.3 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 120 °C
---------------------------------	-------------------

General

Color	gray
Components	free from silicone and halogen
Flammability rating according to UL 94	HB

Ferrule - Al-WM 0,75-8 GY - 3240543

Technical data

General

Material	E-CU
Coating	tin-plated (galvanic)

Standards and Regulations

Flammability rating according to UL 94	HB
--	----

Classifications

eCl@ss

eCl@ss 4.0	27060701
eCl@ss 4.1	27060701
eCl@ss 5.0	27400201
eCl@ss 5.1	27400201
eCl@ss 6.0	27400201
eCl@ss 7.0	27400201
eCl@ss 8.0	27400201

ETIM

ETIM 3.0	EC000005
ETIM 4.0	EC000005
ETIM 5.0	EC000005

UNSPSC

UNSPSC 6.01	30212109
UNSPSC 7.0901	27121703
UNSPSC 11	27121703
UNSPSC 12.01	27121703
UNSPSC 13.2	27121703

Approvals

Approvals

Approvals

EAC / EAC

Ex Approvals

Approvals submitted

Ferrule - Al-WM 0,75-8 GY - 3240543

Approvals


Approval details

EAC

EAC

Drawings

Dimensional drawing

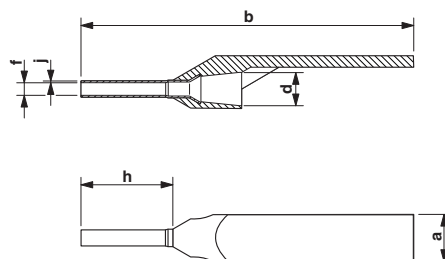

Phoenix Contact 2016 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>