




Extract from the online catalog

VS-25-GC-BU/BU

Order No.: 1652680



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1652680>

D-SUB contact insert, shell size 3, with 25 signal contacts, contact type socket, gender changer, fixing with 4-40 UNC thread

Commercial data

EAN	4017918952808
Pack	10 pcs.
Customs tariff	85369010
Weight/Piece	0.01848 KG
Catalog page information	Page 321 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
06/22/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Mechanical characteristics

Number of positions	25
Insertion/withdrawal cycles	≥ 200
Type of connection	Gender changer
Ambient temperature (operation)	-55 °C ... 125 °C

Material data

Housing material	Steel, yellow chromated
Contact carrier material	Polyester GF
Contact material	Copper alloy

VS-25-GC-BU/BU Order No.: 1652680
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1652680>

Contact surface material	Hard gold-plated over nickel
Inflammability class acc. to UL 94	V0


Electrical characteristics

Rated voltage (III/3)	125 V
Rated surge voltage	1 kV
Rated current	5 A

Drawings

Dimensioned drawing

Gender changer

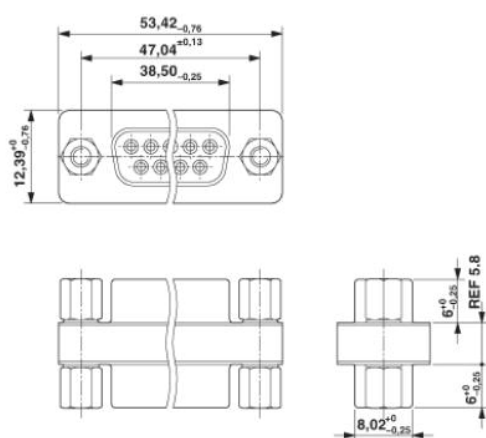

VS-25-GC-BU/BU Order No.: 1652680
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1652680>

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2009 Phoenix Contact
Technical modifications reserved;

onlinecomponents.com