



Extract from the online  
catalog

## ME 35 UTG GN

Order No.: 2907208

Illustration shows a fully mounted version of the electronic housing



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2907208>

Lower part of housing closed, fully assembled, with metal foot catch.

### Commercial data

|                          |                    |
|--------------------------|--------------------|
| EAN                      | 4017918131425      |
| Note                     | Made-to-order      |
| sales group              | F050               |
| Pack                     | 10 pcs.            |
| Customs tariff           | 85472000           |
| Weight/Piece             | 0.06351 KG         |
| Catalog page information | Page 575 (CC-2009) |

### Product notes

WEEE/RoHS-compliant since:  
05/23/2005



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General

|                  |                   |
|------------------|-------------------|
| Housing type     | Component housing |
| Housing material | Polyamide         |
| Color            | green             |

#### Dimensions / positions

|        |       |
|--------|-------|
| Length | 99 mm |
|--------|-------|

ME 35 UTG GN Order No.: 2907208

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2907208>


|                     |       |
|---------------------|-------|
| Width               | 35 mm |
| Number of positions | 24    |

#### Technical data


|                                                               |                   |
|---------------------------------------------------------------|-------------------|
| Ambient temperature (operation)                               | -40 °C ... 105 °C |
| Inflammability class acc. to UL 94                            | V0                |
| Power dissipation at 20°C in the horizontal mounting position | 7.5 W 13.8 W      |

#### Diagrams/Drawings

Dimensioned drawing

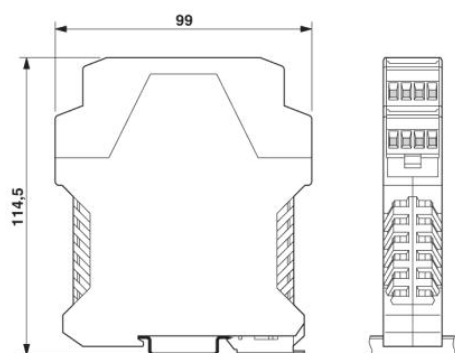

Dimensions of the electronic housing ME...  
with double-level upper part

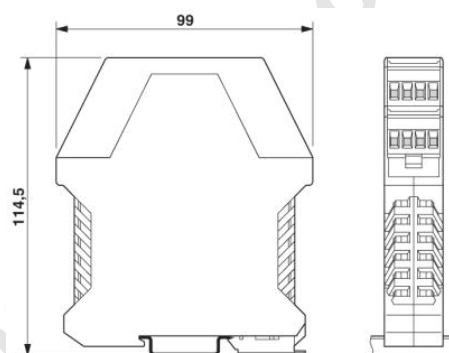

Dimensions of the electronic housing ME...  
with double-level upper part



ME 35 UTG GN Order No.: 2907208  
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2907208>

---

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;

onlinecomponents.com