

Surge protection device - TTC-6-MOV-D-24DC-UT-I - 2906841

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Medium surge protection with integrated status indicator for a 2-wire floating signal circuit.

Why buy this product

- ✓ Space-saving installation due to the narrow overall width of 6.2 mm
- ✓ Signaling without additional auxiliary power, thanks to the mechanical status indicator
- ✓ Optional remote signaling module monitors up to 40 items, without additional wiring
- ✓ Safe behavior in the event of overload, thanks to the integrated disconnect device
- ✓ Medium surge protection by means of varistor



Key Commercial Data

Packing unit	1
GTIN	 4 055626 136974
GTIN	4055626136974
Custom tariff number	85363010

Technical data

Dimensions

Height	92 mm
	92 mm
Width	6.2 mm
Depth	69.5 mm

Ambient conditions

Surge protection device - TTC-6-MOV-D-24DC-UT-I - 2906841

Technical data

Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Degree of protection	IP20 (with end cover)

General

Housing material	PBT
Flammability rating according to UL 94	V-0
Color	traffic grey A RAL 7042
Mounting type	DIN rail: 35 mm
Design	Rail-mountable module, one-piece
Direction of action	Line-Earth Ground

Protective circuit

IEC test classification	C1
	C2
	C3
Nominal voltage U_N	24 V DC
Maximum continuous voltage U_C	30 V DC
Rated current	10 A (60°C)
Operating effective current I_C at U_C	$\leq 100 \mu A$
Nominal discharge current I_n (8/20) μs (core-GND)	2 kA
Voltage protection level U_p (core-GND)	$\leq 110 V$ (C1 - 700 V/350 A)
	$\leq 160 V$ (C2 - 4 kV)
	$\leq 80 V$ (C3 - 25 A)
Response time t_A (core-earth)	$\leq 25 ns$
Input attenuation a_E , asym.	typ. 0.3 dB ($\leq 60 kHz / 150 \Omega$)
Cut-off frequency f_g (3 dB), asym. (GND) in 150 Ohm system	typ. 200 kHz
Capacity (Core-GND)	10 nF
Resistance in series	$\leq 100 m\Omega$
Surge protection fault message	optical
Impulse durability (conductor-GND)	C1 - 350 A
	C2 - 2 kA
	C3 - 25 A

Connection data

Connection method	Screw connection
Connection method IN	Screw terminal blocks
Connection method OUT	Screw terminal blocks
Screw thread	M3

Surge protection device - TTC-6-MOV-D-24DC-UT-I - 2906841

Technical data

Connection data


Tightening torque	0.5 Nm ... 0.6 Nm
Stripping length	8 mm
Conductor cross section flexible	0.2 mm² ... 2.5 mm²
Conductor cross section solid	0.2 mm² ... 4 mm²
Conductor cross section AWG	24 ... 12

Standards and Regulations


Standards/specifications	IEC 61643-21 2000 + corrigendum 2001 + A1:2008, modified + A2:2012
	EN 61643-21 2001 + A1:2009 + A2:2013

Drawings


Diagram

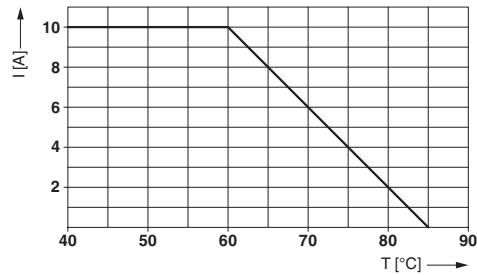

Dimensional drawing

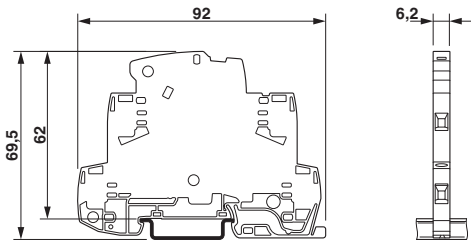

Circuit diagram



Approvals

Approvals

Approvals

UL Listed

Ex Approvals

Surge protection device - TTC-6-MOV-D-24DC-UT-I - 2906841

Approvals

Approval details

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 138168
-----------	---	---	---------------