THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	MINIMUM LENGTH	WEIGHT	CONNECTOR & FERRULE TYPE
F96D2-NM1	39.37 in. [1 meter]	1.18 lb/10 pcs. [537.8g/10 pcs.]	ST CERAMIC
F96D2-NM2	78.74 in. [2 meters]	1.77 lb/10 pcs. [805.8g/10 pcs.]	ST CERAMIC
F96D2-NM3	118.11 in. [3 meters]	2.36 lb/10 pcs. [1073.7g/10 pcs.]	ST CERAMIC
F96D2-NM6	236.2 in. [6 meters]	4.13 lb/10 pcs. [1877.4g/10 pcs.]	ST CERAMIC
F96D2-NM10	393.7 in. [10 meters]	6.48 lb/10 pcs. [2949.0g/10 pcs.]	ST CERAMIC

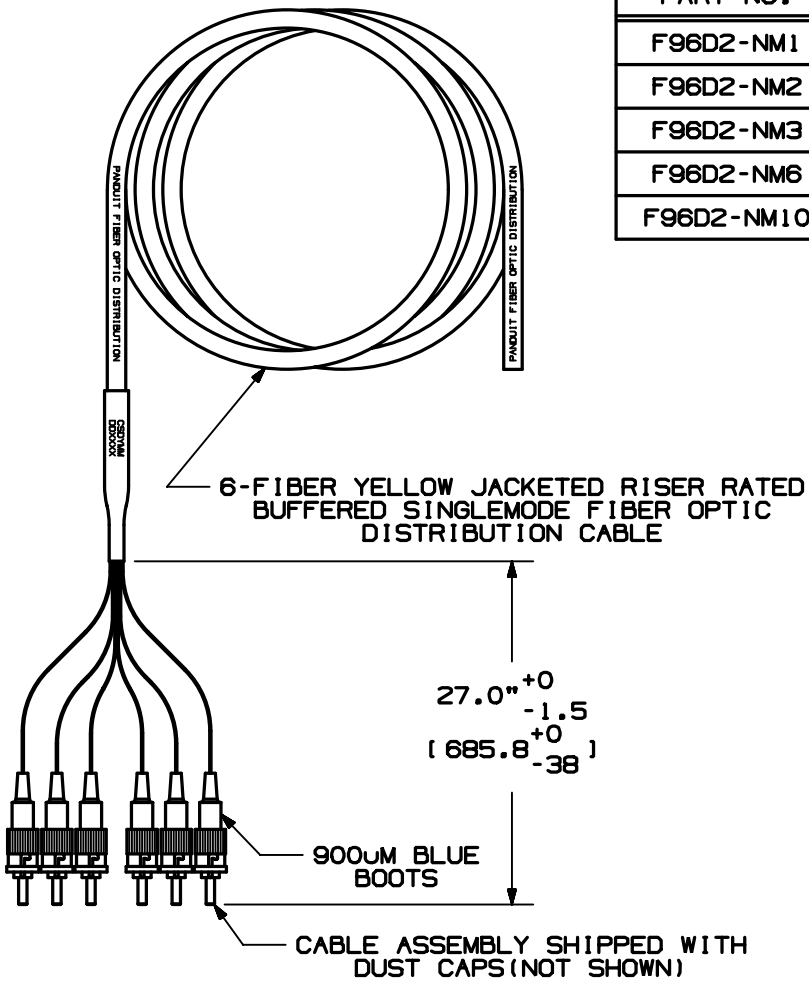

NOTES:
1. SEE CURRENT CATALOG FOR PACKAGE QUANTITY.
2. 6 FIBER BUFFERED SINGLEMODE 9/125uM GLASS OPTICAL FIBER DISTRIBUTION CABLE, RISER RATED.
3. PIGTAILS TERMINATED WITH 900uM BLUE BOOT SINGLEMODE ST CONNECTORS.
4. ASSEMBLED WITH TEMPERATURE CURED EPOXY.
5. JACKET COLOR IS YELLOW. 900uM BOOT COLOR IS BLUE.
6. THE MAXIMUM INSERTION LOSS PER CONNECTOR IS .35dB.
7. THE MINIMUM RETURN LOSS PER FERRULE IS 55dB.
8. DUST CAPS (NOT SHOWN) INSTALLED ON ALL CONNECTORS.
9. ALL DIMENSIONS IN BRACKETS ARE METRIC.

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OTH
R	01-18-01	EFK		RELEASED FOR PRODUCTION	00997-14			

CAD FILENAME/LAYERS: M00997BJ_DC_00A.PRT

PANDUIT CORP. TINLEY PARK, ILLINOIS

PRETERMINATED 6 STRAND SINGLEMODE ST FIBER OPTIC PIGTAIL (F96D2-NM* SERIES) CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ± .06[1.5] (.XXX) ±
(.XX) ± ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY: EFK
DATE: 01-18-01
CHK'D:
MAT'L: AS NOTED
SCALE: NONE
DRAWING NO.: 00997-14
DWG SIZE: A