

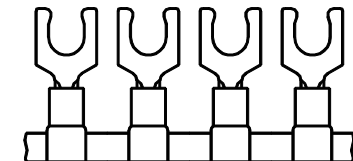


PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A $\pm .03$	W $\pm .010$	C MIN	M $\pm .03$	H $\pm .01$
PV18-5SLFB-3K	#5	.72 (18.29)	.26 (6.60)	.19 (4.83)	.61 (15.49)	.12 (3.05)
PV18-6SLFB-3K	#6	.72 (18.29)	.27 (6.86)	.19 (4.83)	.61 (15.49)	.14 (3.56)
PV18-8SLFB-3K	#8	.77 (19.56)	.29 (7.37)	.23 (5.84)	.65 (16.51)	.16 (4.06)
PV18-10SLFB-3K	#10	.78 (19.81)	.33 (8.38)	.23 (5.84)	.65 (16.51)	.19 (4.83)

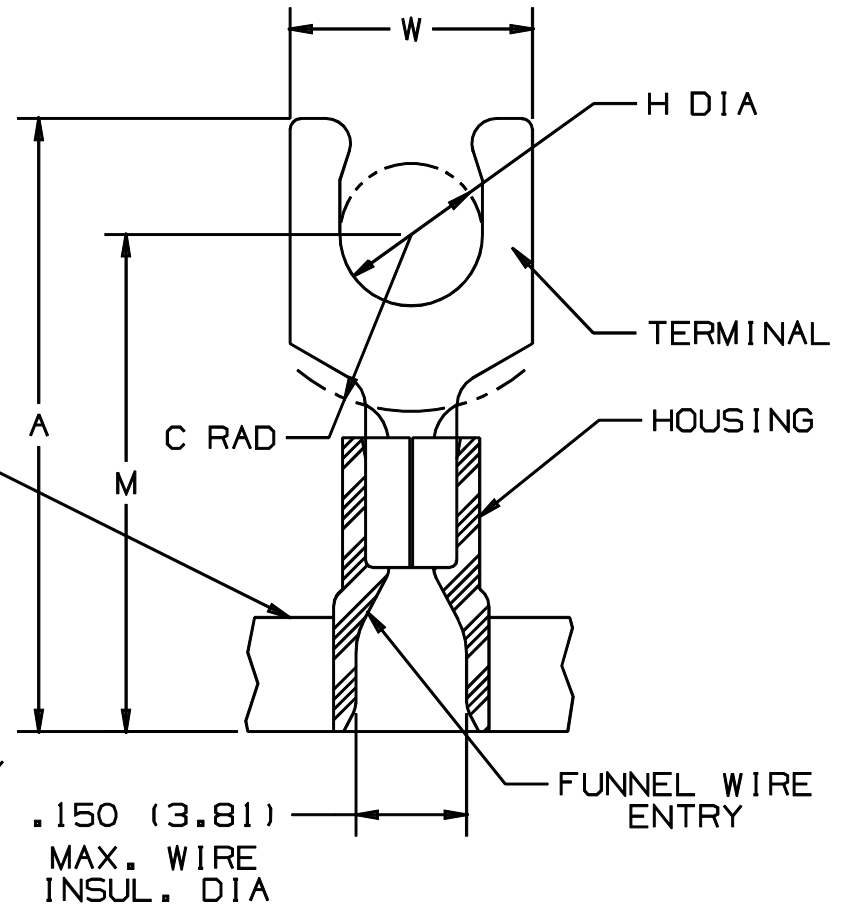

NOTES :

1. UL LISTED AND CSA CERTIFIED FOR :
 - A. 600 V MAX. VOLTAGE RATING
 - B. 221°F (105°C) MAX. TEMP. RATING
 - C. #22-18 AWG (0.5-1.5 mm²) STRANDED, COPPER WIRE ONLY
 2. PACKAGE QTY. : 3K = 3000 PCS.
CONTINUOUS MOLDED CARRIER STRIP
 3. MATERIAL :
 - A. STAMPING - .03" THK COPPER, TIN PLATED
 - B. HOUSING - RED VINYL
 4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
 5. INSTALLATION TOOLS :
 - A. PRESSES - CP-851, CP-860, CP-861
 - B. APPLICATOR - CA-800
 - C. DIE INSERTS - CD-800-1
 6. WIRE STRIP LENGTH 1/4 +1/32 (6.4 +0.8)
-0 -0
- 
LISTED
587H
E52164



LISTED
587H
E52164



CERTIFIED
LR31212

04	12/00	ED		FILESPEC WAS: N41075AA_PCD_03	08925				 PANDUIT CORP TINLEY PARK, ILLINOIS				
03	8/96	JB		UPDATED NOTES & ADDED NOTE #6	05015								
02	1/94	JW	JW	CHANGED DIMENSIONS "A", "W" & "M"	2026	LA	KRS JJMC		TERMO 2PC. CONTINUOUSLY MOLDED VINYL INSULATED, #22-18 BARREL, SHORT LOCKING FORKS				
1	3/88	FS	FS	REDRAWN ON CAD		LA	KS						
REV	DATE	BY	CHK	DESCRIPTION	ECN	QA	CUST	PM	APP	DRAWN BY FES	CHK'D FES	SCALE NONE	DRAWING NO. A41075