


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A $\pm .03$	W $\pm .01$	C $\pm .02$	M $\pm .03$	H $\pm .01$
PNF 14-6SLF-3K	#6	.75 (19.05)	.25 (6.35)	.19 (4.83)	.64 (16.26)	.14 (3.56)
PNF 14-10SLF-3K	#10	.81 (20.57)	.33 (8.38)	.23 (5.84)	.68 (17.27)	.19 (4.83)

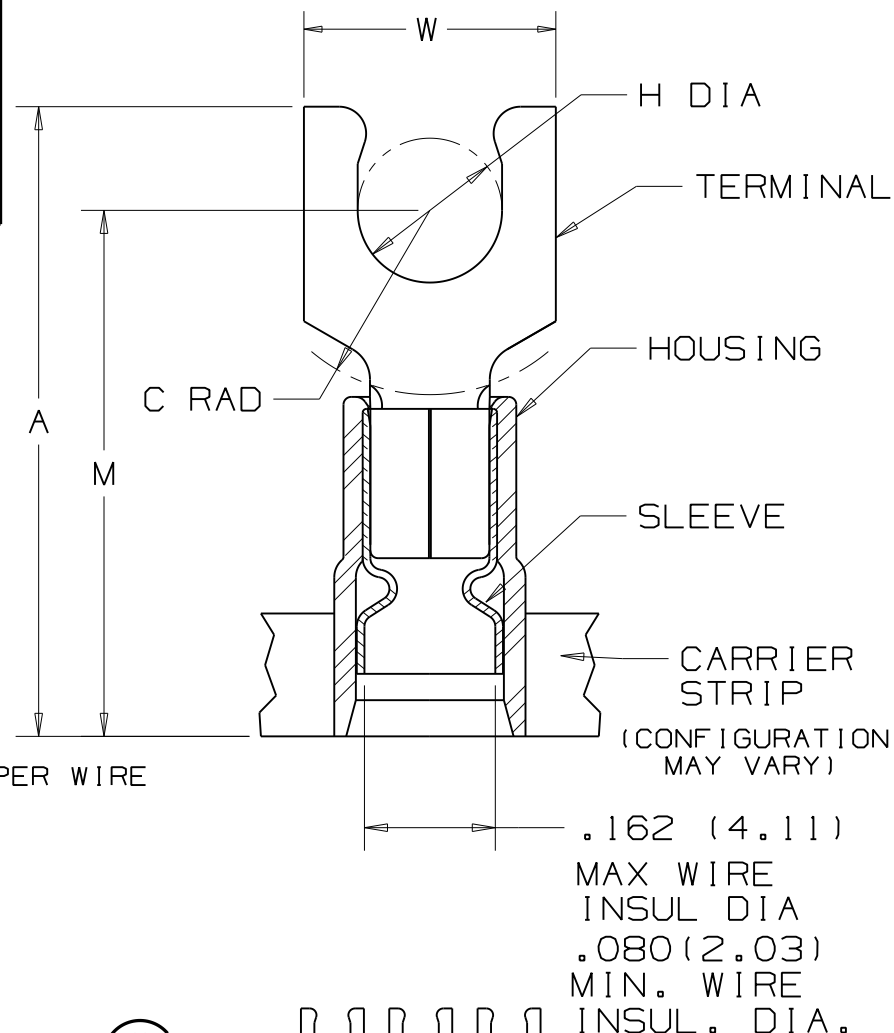

NOTES :

1. UL LISTED AND CSA CERTIFIED FOR :
- A. 600 V MAX. VOLTAGE RATING
 - B. 221°F (105°C) MAX. TEMP. RATING
 - C. #16-14 AWG (1.5-2.5 mm²) SOLID OR STRANDED, COPPER WIRE

2. PACKAGE QTY. : 3K = 3000 PCS.
CONTINUOUS MOLDED CARRIER STRIP

3. MATERIAL :
A. STAMPING - .03" THK COPPER, TIN PLATED
B. HOUSING - BLUE NYLON
C. SLEEVE - BRASS, TIN PLATED

4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS

5. INSTALLATION TOOLS :
- A. PRESSES - CP-851, CP-860, CP-861
 - B. APPLICATOR - CA-800
 - C. DIE INSERTS - CD-800-2


6. WIRE STRIP LENGTH: $1/4^{+1/32}_{-0}$ (6.4 $^{+.8}_{-0}$)



LISTED
587H
E52164



CERTIFIED
LR31212



									PANDUIT	CORP.	TINLEY PARK, ILLINOIS
05	11/7	SRB		Removed part #'s PNF14-5SLF-3K, PNF14BSLF-3K, PNF14-14SLF-3K Parts obsoleted					TERMO 3PC. CONTINUOUSLY MOLDED NYLON (FUNNEL) INSULATED, 16-14 BARREL, SHORT LOCKING FORKS		
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY GRM	CHK'D TD	SCALE NONE	DRAWING NO. A41134