



PART #		TAB SIZE	WIRE RANGE mm ²	DIMENSIONS mm		
				A ±0,4	B ±0,3	C ±0,3
PREFIX	PK					
DM1-488	-C -M	4,8 X 0,8 (.187 X .032)	0,5-1,0	15,0 (.59)	5,9 (.23)	2,5 (.10)
DM2-488	-C -M	4,8 X 0,8 (.187 X .032)	1,5-2,5	15,0 (.59)	5,9 (.23)	2,5 (.10)



NOTES:

1. USED FOR:
A. STRANDED COPPER WIRE ONLY
2. MATERIAL:
A. STAMPING - 0,41mm (.02) THK BRASS, TIN PLATED
B. SLEEVE - BRASS, TIN PLATED
3. FIRST INSERTION FORCE - 53 N (12 LB) MAX
FIRST WITHDRAWAL FORCE - 53 N (12 LB) MAX
27 N (6 LB) MIN
4. DIMENSIONS IN BRACKETS ARE IN INCHES
5. PACKAGE QTY:
A. STD: C=100
B. BULK: M=1000
6. WIRE STRIP LENGTH: 7,1 ⁺⁸/₋₀ (9/32 ^{+1/32}/₋₀)
7. INSTALLATION TOOLS: REF. DWGS.
A41522, A41523, A41524, A41525

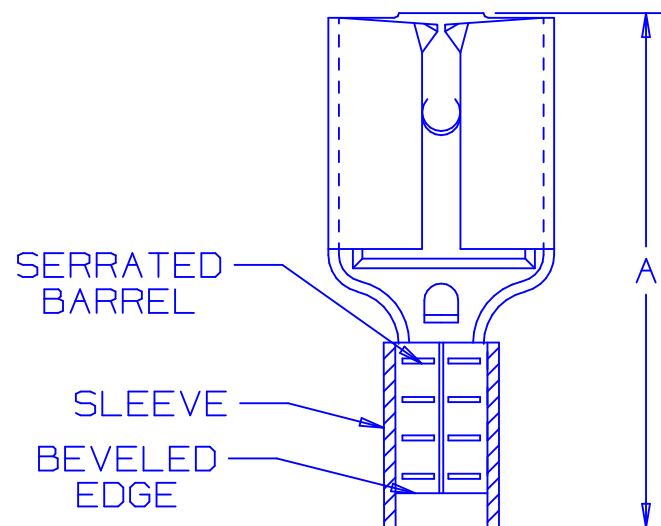

A41436_04

04	7/03	KLFU		UPDATED DRAWING				 PANDUIT CORP. TINLEY PARK, ILLINOIS
03	7/98	TM	RLS	UPDATED PART NUMBERS AND WIRE RANGE	07035	LA	DBH	
02	10/97	TM	WB	CHANGED DECIMAL POINTS TO COMMAS	06433	LA	DBH	
01	1/97	TM	RLS	UPDATE DIMENSIONS FILESPEC WAS NPC_A41436_00	05478	LA	DBH	
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY BDK CHK'D SCALE NONE DRAWING NO. A41436

NON-INSULATED FEMALE METRIC DISCONNECT
SLEEVED BARREL (4,8mm X 0,81mm TAB SIZE)