
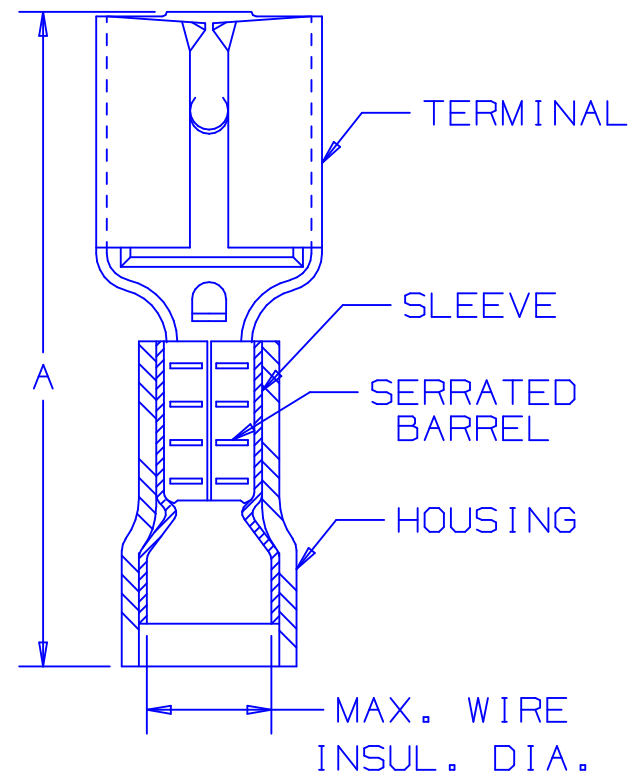


PART #		TAB SIZE	WIRE RANGE mm ²	MAX. INSUL. DIA.	DIMENSIONS ^{mm}			HOUSING COLOR
PREFIX	PK				A ±0,4	B ±0,3	C ±0,3	
DMNF1-488	-C -M	4,8 X 0,8 (.187 X .032)	0,5-1,0	3,6 (.14)	19,6 (.77)	5,8 (.23)	2,5 (.10)	RED
DMNF2-488	-C -M	4,8 X 0,8 (.187 X .032)	1,5-2,5	4,2 (.17)	19,6 (.77)	5,8 (.23)	2,5 (.10)	BLUE

NOTES:

- USED FOR:
 - 300V. MAX. VOLTAGE RATING
 - STRANDED COPPER WIRE ONLY
 - 105° C (221° F) MAX. TEMP. RATING
- MATERIAL:
 - STAMPING - 0,41mm (.02) THK BRASS, TIN PLATED
 - HOUSING - NYLON
 - SLEEVE - BRASS, TIN PLATED
- FIRST INSERTION FORCE - 53 N (12 LB.) MAX
FIRST WITHDRAWAL FORCE - 53 N (12 LB.) MAX
27 N (6 LB.) MIN
- DIMENSIONS IN BRACKETS ARE IN INCHES
- PACKAGE QTY:
 - STD: C=100
 - BULK: M=1000
- WIRE STRIP LENGTH: $7,1 \begin{smallmatrix} +,8 \\ -0 \end{smallmatrix}$ ($9/32 \begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$)
- INSTALLATION TOOLS: REF. DWGS.
A41522, A41523, A41524, A41525



A41448_03

03	11/04	KLFU		UPDATED DRAWING				 PANDUIT CORP. TINLEY PARK, ILLINOIS
02	7/98	TM	RLS	UPDATED PART NUMBERS AND WIRE RANGE	07035	LA	DH	
01	10/97	TM	WJB	CHANGED DECIMAL POINTS TO COMMAS	06433	LA	DH	
00	11/91	BK	RLS	RELEASED	00687	LA	KS	
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY BDK CHK'D SCALE NONE DRAWING NO. A41448

 NYLON INSULATED FEMALE METRIC DISCONNECT
 FUNNELED WIRE ENTRY (4,8mm X 0,8mm TAB SIZE)