


PART NUMBER		TAB SIZE	WIRE RANGE mm ²	DIMENSIONS mm		
PREFIX	PK			A ±,38	B ±,25	C ±,25
DMNF1-63M	-C -M	6,3 X 0,8 (.250 X .032)	0,5-1,0 (22-18)	22,7 (.89)	6,4 (.250)	0,8 (.03)

NOTES:

- USED FOR:
 - 600V MAX. VOLTAGE RATING.
 - 105° C (221°F) MAX. TEMP. RATING
 - STRANDED COPPER WIRE ONLY.
- PACKAGE QTY:
 - STD: C=100
 - BULK: M=1000
- MATERIAL:
 - STAMPING: ETP 110 COPPER, NICKEL PLATED
 - HOUSING: TYPE 6/6 NYLON, RED
- WIRE STRIP LENGTH: 7,1 ^{+ ,8}₋₀ (9/32 ^{+1/32}₋₀)
- DIMENSIONS IN BRACKETS ARE IN INCHES OR AWG.
- INSTALLATION TOOLS: REF. DWGS.
A41522, A41523, A41524, A41525

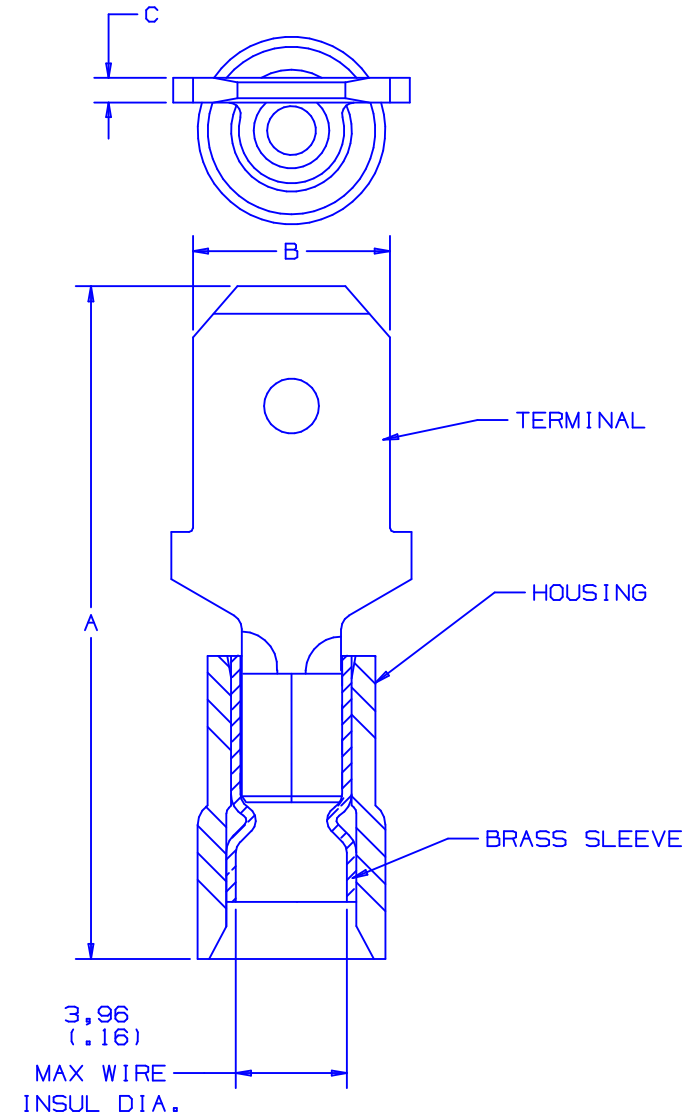

A41508_05

05	11/04	KLFU		WIRE RANGE 1,0 WAS 1,5 B DIM WAS 6,35 C DIM WAS ,76				 PANDUIT CORP. TINLEY PARK, ILLINOIS
04	10/97	TM	WJB	CHANGED DECIMAL POINTS TO COMMAS	06432	LA	DSH	
03	1/97	TM	RLS	UPDATED DIMENSIONS, WAS TIN PLATED FILESPEC WAS NPC_A41508_02	05478	LA	DH	
02	1/92	BK	RLS	NOTES: ADDED #6, ADDED COPPER TO #1C. CHANGED COMMAS TO PERIODS.	00765	LA	KS	
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY JMV CHK'D SCALE NONE DRAWING NO./CAD FILENAME A41508

0,5 - 1,5 mm² ; 6,3 TAB
METRIC 3PC. BARREL INSULATED MALE DISCONNECT