


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER		TAB SIZE	WIRE RANGE mm ²	DIMENSIONS mm		
PREFIX	PK			A ±.38	B ±.25	C ±.25
DMNF2-63M	-C -M	6.3 X 0.8 (.250 X .032)	1.5-2.5 (16-14)	23.6 (.93)	6.35 (.25)	0.76 (.03)

NOTES:

- USED FOR:
A. 600V MAX. VOLTAGE RATING.
B. 105° C (221°F) MAX. TEMP. RATING
C. STRANDED COPPER WIRE ONLY.
- PACKAGE QTY:
A. STD: C=100
B. BULK: M=1000
- MATERIAL:
A. STAMPING: ETP 110 COPPER, NICKEL PLATED
B. HOUSING: TYPE 6/6 NYLON, BLUE
- WIRE STRIP LENGTH: 7.1 $\begin{smallmatrix} +.8 \\ -0 \end{smallmatrix}$ (9/32 $\begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$)
- DIMENSIONS IN BRACKETS ARE IN INCHES OR AWG.
- INSTALLATION TOOLS REF. DWGS.
A41522, A41523, A41524, A41525

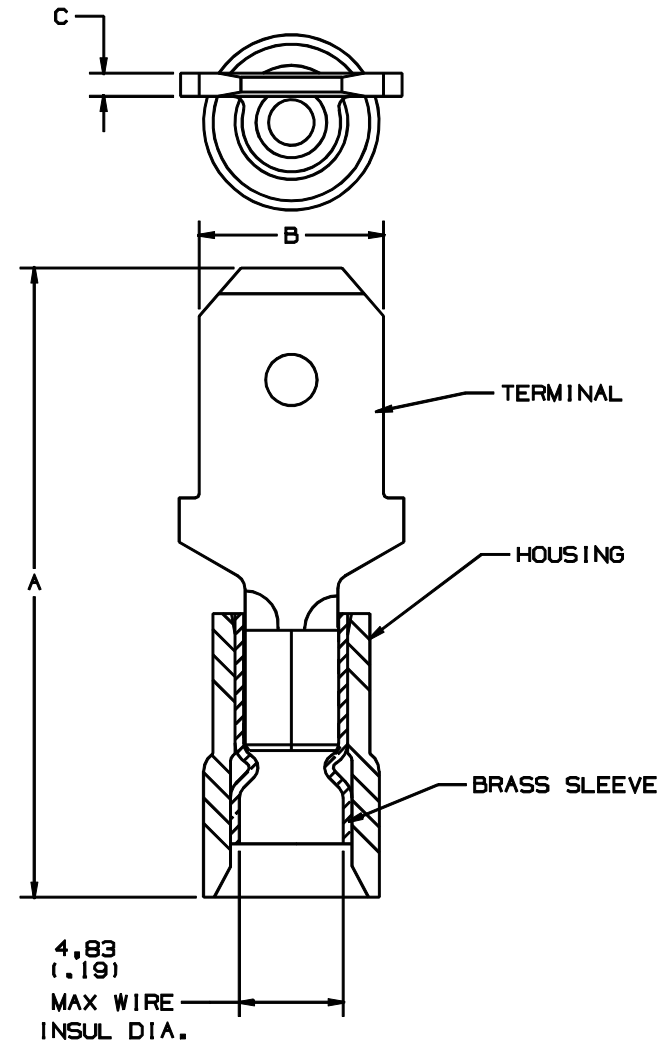

A41509_03

03	10/97	TM		CHANGED DECIMAL POINTS TO COMMAS				PANDUIT CORP. TINLEY PARK, ILLINOIS 1.5 - 2.5 mm ² ; 6.3 TAB METRIC 3PC. BARREL INSULATED MALE DISCONNECT
02	1/92	BK	RS	NOTES: ADDED #6, ADDED COPPER TO #1C. CHANGED COMMAS TO PERIODS.	00765	LA	KS	
01	8/91	SJ	SJ	LM WIRE STRIP LENGTH WAS 8.7 mm	00563	LA	KS	
00	5/91	JV	SJ	RELEASED	00549	LA	DH	
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY JMV CHK'D LM SCALE NONE DRAWING NO./CAD FILENAME A41509