


PART NUMBER		TAB SIZE	WIRE RANGE AWG (mm ²)	DIMENSIONS		HOUSING COLOR	TOOL CHART RECOMMENDED PRESSES CP-861, CP-860 CP-851, CP-862 CA-800/CA9 DIE INSERTS
PREFIX	PK			A ±.030	B MAX (.8)		
DV18-145MB	-3K	.145 X .032 (3.7 X 0.8)	22-18 (0.38-1.0)	.90 (22.9)	.155 (3.94)	RED	CD-800-1 CD9-1A
DV14-145MB	-3K	.145 X .032 (3.7 X 0.8)	16-14 (1.5-2.5)	.90 (22.9)	.175 (4.45)	BLUE	CD-800-2 CD9-2A

NOTES:

- USED FOR:
 - 600V MAX. VOLTAGE RATING.
 - 90° C (194° F) MAX. TEMP. RATING.
 - STRANDED COPPER WIRE ONLY.
- PACKAGE QTY: -3K = 3000 PC. REEL
- MATERIAL:
 - STAMPING: .032 (0.8) THICK ETP 110 COPPER, TIN PLATED.
 - HOUSING: VINYL
- WIRE STRIP LENGTH: $1/4 \begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ (6.4 $\begin{smallmatrix} +.8 \\ -.0 \end{smallmatrix}$)
- DIMENSIONS IN BRACKETS ARE IN MM OR MM².

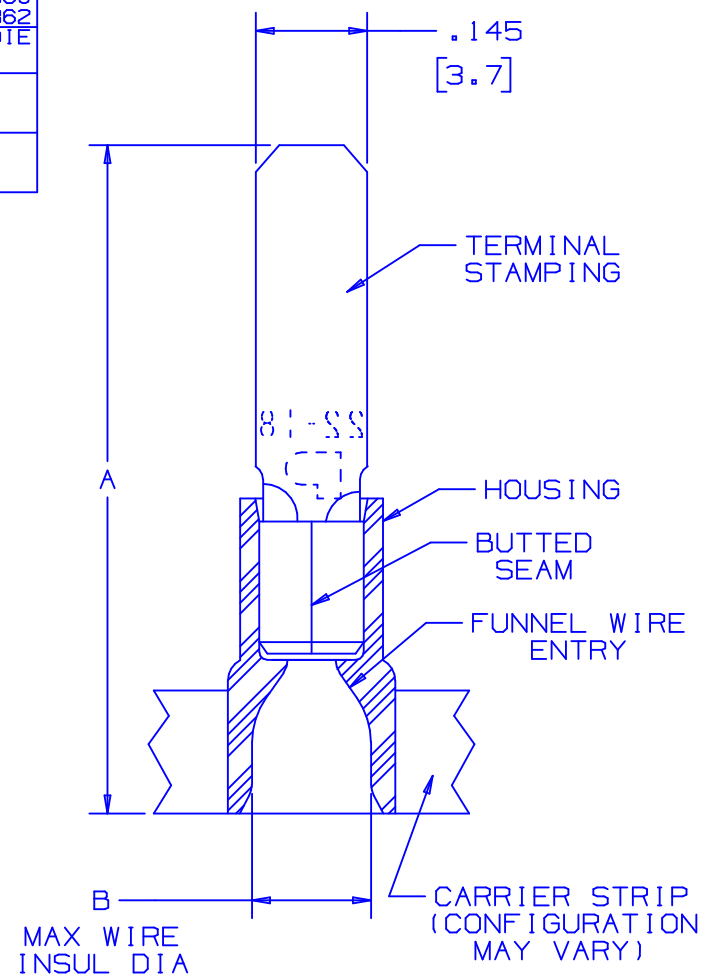

A41532_04

04	2/05	KLFU	SKB	ADDED CP-862, CD9 & CA9 TO CHART						 TINLEY PARK, ILLINOIS
03	1/01	RM		FILESPEC WAS N41532AA_PCD_02	8933		JAC	CCH		
02	5/95	MS		REMOVED UL - CSA LOGOS	03248					
01	4/94	DL	DL	REMOVED COIN FROM TAB END OF PART	03036		LA	KS		
REV	DATE	BY	CHK	DESCRIPTION	ECN #	QA	CUST	PM	APP	
										DRAWN BY BDK CHK'D RLS SCALE NONE DRAWING NO. A41532