

Panduit Part number		Wire range AWG (mm ²)	Housing color	Dim. "F"	Minimum Wire Insulation Diameter	Maximum Wire Insulation Diameter	Tools
Prefix	PK						Presses: CP-861, CP-860 CP-851, CP-862
							CA-800/CA9 Applicator dies:
DNG18-250FL	-3K	22-18 (0,5-1,0)	Red	.24 (6,1)	.060 (1,52)	.126 (3,20)	CD-800-14 CD9-14A
DNG14-250FL	-3K	16-14 (1,5-2,5)	Blue	.25 (6,4)	.080 (2,03)	.150 (3,81)	

Notes:

1. Used for:

- A. 300 V maximum rating
- B. Temperature Rating of Insulation:
125°C(257°F)
- C. Stranded copper wire only

2. Wire strip length: $\frac{1}{4} \begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix} \begin{smallmatrix} +,8 \\ (6,4 \end{smallmatrix} -0)$

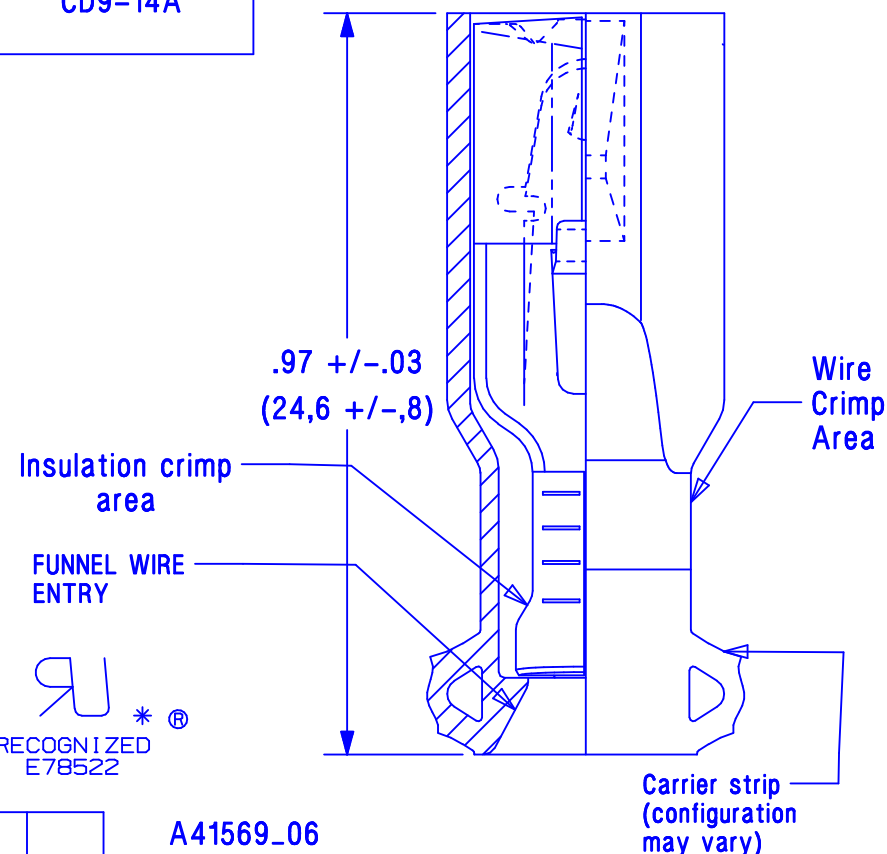
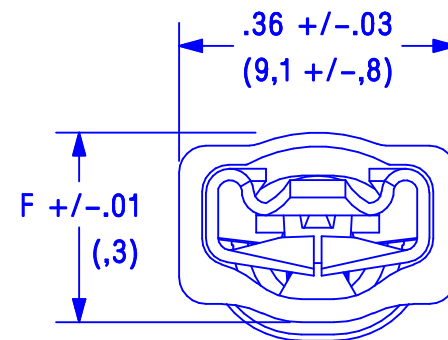
3. Material:

- A. Stamping - Tin plated brass
- B. Housing - Nylon

4. Tab size .250 X .032 (6,3 X ,8)
Hole type detent

5. Packaging:

-3k = 3000 piece reel

6. Dimensions in brackets are in millimeters or mm²

06	2/05	KLFU		ADDED CP-862, CA9 & CD9 TO CHART			
05	1/01	EJS	SKB	WIRE RANGE FOR PART DNG18-250FL WAS (0,5-1,5), NOTE 1-B WAS 257°F(125°C) MAX TEMP RATING, FILE SPEC WAS N41569AA_PCD_04	08973	JAC	CCH
04	1/97	JAMB	RLS	ADDED TO TABLE,"MIN. WIRE INSULATION DIA."	05404	LA	DBH
03	12/95	ED	RLS	UL RECOGNIZED	03830	TFKE	LA
02	2/95	MS	JW	WIRE STRIP LENGTH WAS 3/16	03002	KS	LA
REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	CUST

A41569_06

PANDUIT CORP.

TINLEY PARK, ILLINOIS

Reel Smart™ Disco-Lok™
Fully Insulated Locking Female Disconnect

DRAWN BY	CHK'D	SCALE	DRAWING NO./CAD FILENAME
JAW	JAW	None	A41569