



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	PACKAGE QTY.	MIN. BUNDLE DIA.	MAX. BUNDLE DIA.	LENGTH L +.2 [5]
MLT2.7WH-LP316	50	2.0" [51]	2.7" [69]	10.2" [259]
MLT4WH-LP316	50	2.0" [51]	4" [102]	14.3" [362]
MLT6WH-LP316	50	2.0" [51]	6" [152]	20.5" [521]
MLT8WH-LP316	50	2.0" [51]	8" [203]	26.8" [679]
MLT10WH-LP316	50	2.0" [51]	10" [254]	33.0" [838]

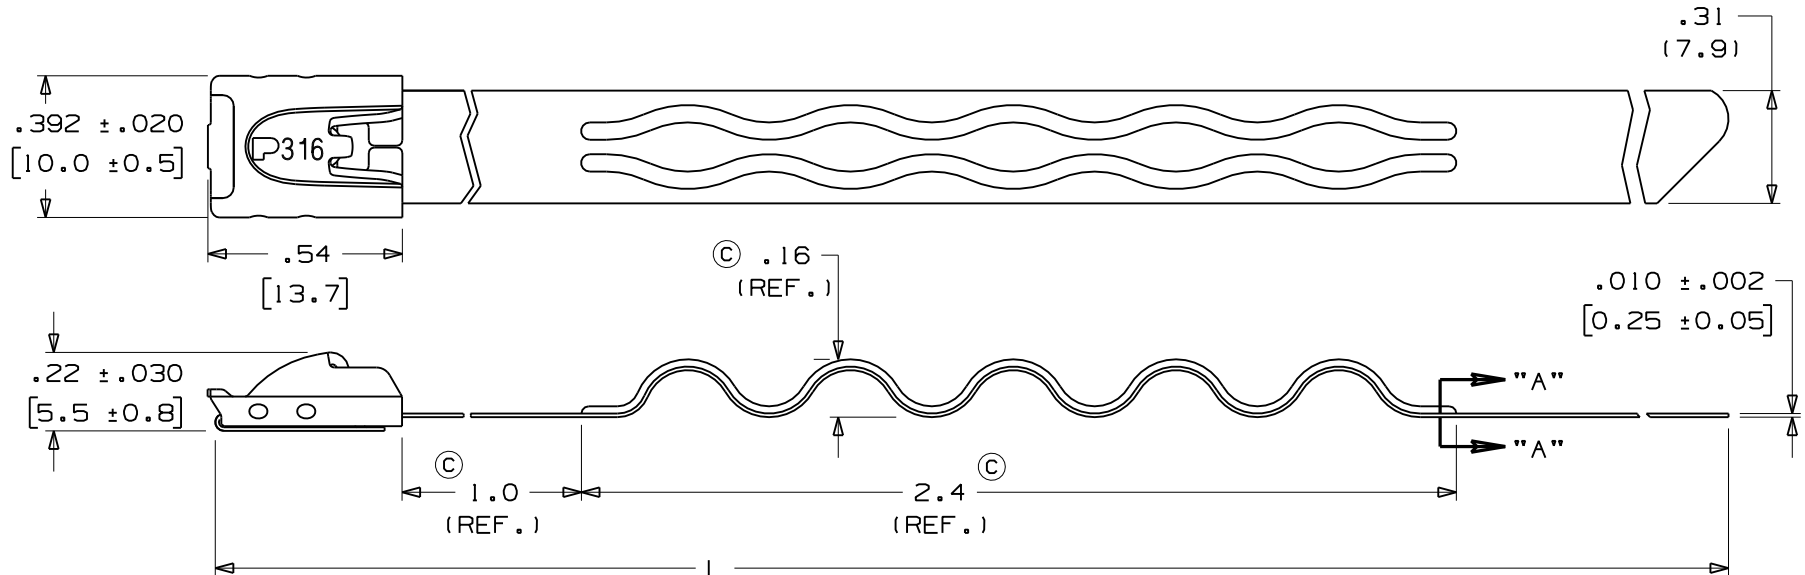

NOTES:

- 1.) APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, HTMT
- 2.) MINIMUM LOOP TENSILE STRENGTH - 450 LBS (2000 NEWTONS)
ALL PARTS WHEN TESTED ON A 3" MANDREL EXCEPT
PART NO. MLT2.7WH-LP316 WHEN TESTED ON A 1 1/2" MANDREL.
- 3.) [] DENOTES DIMENSION IN MILLIMETERS
- 4.) TOLERANCES:
.XXX = ±.010 [.25]
.XX = ±.02 [.5]
.X = ±.03 [.8]
ANGLES = ±2°
- 5.) MATERIAL: 316 STAINLESS STEEL

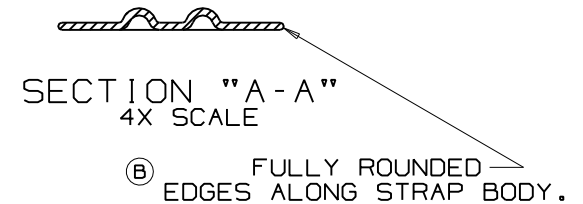

S41123_04

04	3/07	JAMB	SKB	(F) REMOVED PANDUIT PART NO. MLT2.7WH-TL316, MLT4WH-TL316 & MLT6WH-TL316 PACKAGE QTY. 250	SS00338		---	 PANDUIT CORP. TINLEY PARK, ILLINOIS			
03	11/06	JAMB	DPN	(E) ADDED PANDUIT PART NO. MLT2.7WH-TL316, MLT4WH-TL316 & MLT6WH-TL316 PACKAGE QTY. 250	SS00281		---				
02	9/04	JAMB	DPN	(B) REMOVED "AISI NO. 1 FULL RADIUSED" & REPLACED WITH "FULLY ROUNDED". (C) ADDED "REF." TO DIM. (D) mm WAS (50)	12052	CCH	JJB	WAVE-TY HEAVY SERIES - 316 STAINLESS STEEL			
01	10/03	BRH	DPN	(A) ADDED ST3MT TO APPLICATION TOOLS NOTE	11162	CCH	JJB				
REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	CUST	DRAWN BY JAMB	CHK'D DPN	SCALE 2X	DRAWING NO. S41123