




NOTES:

- USED FOR:
 - 600V MAX VOLTAGE RATING
 - 257°F (125°C) MAX TEMP RATING (UL)
221°F (105°C) MAX TEMP RATING (CSA)
 - STRANDED COPPER WIRE ONLY
- WIRE STRIP LENGTH: $9/32^{+1/32}_{-0}$ (7.1 $^{+.8}_{-0}$)
- MAX WIRE INSULATION DIA .244 (6.20)
MIN WIRE INSULATION DIA .097 (2.46)
- MATERIAL:
 - STAMPING: TIN PLATED BRASS
 - HOUSING : TYPE 6/6 NYLON
- PACKAGING (CONTINUOUS MOLDED ON REEL):
 - BULK ONLY: -2K = 2000
- DIMENSIONS IN BRACKETS ARE IN mm OR mm²
- COLORS ARE TRANSLUCENT

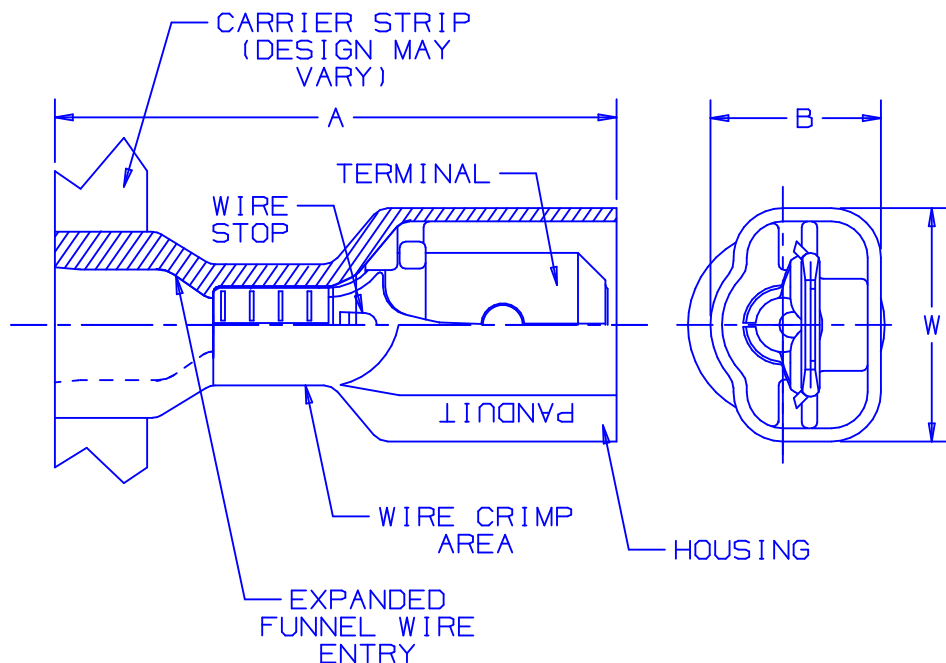

LISTED
20H3
E78522



CERTIFIED
LR31212

PART NUMBER		TAB SIZE	WIRE RANGE (AWG)	HOUSING COLOR (NOTE 7)	DIMENSIONS			TOOL CHART RECOMMENDED PRESSES: CP-851, CP-861, CP-862 CA-800/CA9 APPLICATOR DTE INSERTS
PREFIX	PK				A $\pm .02$ (.5)	W $\pm .01$ (.3)	B $\pm .01$ (.3)	
DNF14250FIMX	-2K	.250 X .032 (6.3 X 0.8)	16-14* (1.5-2.5)	BLUE	.97 (24.6)	.41 (10.4)	.29 (7.4)	CD-800-8 CD9-8B
DNF18250FIMX	-2K	.250 X .032 (6.3 X 0.8)	22-18** (.5-1.0)	RED	.97 (24.6)	.41 (10.4)	.29 (7.4)	CD-800-8 CD9-8B

* ALSO CSA CERTIFIED FOR USE WITH 2 #16 AWG OR 2 #18 AWG WIRES
 ** ALSO CSA CERTIFIED FOR USE WITH 2 #18 AWG, 2 #20 AWG, OR 2 #22 AWG WIRES

A41545_04

								PANDUIT CORP. TINLEY PARK, ILLINOIS			
04	7/03	KLFU		ADDED INTERNAL SERRATIONS ADDED CP-862, CD9 & CA9 TO CHART WIRE RANGE .5 WAS .38				REELSMART™ DISCO™ MALE DISCONNECT FULLY INSULATED, EXPANDED NYLON .250 X .032, TAB SIZE			
03	1/01	SAB		FILE SPEC. WAS N41545AA_PCD-02::2.L1.A							
02	7/93	BK	RS	REMOVED DASH FROM PART NUMBERS							
REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	APP	DRAWN BY BDK	CHK'D RLS	SCALE 	DRAWING NO. A41545