


specifications

The cable management rack shall be constructed of steel with a rack footprint capable of staying within a 24" floor tile. The rack shall be capable of mounting as 19" or 23" EIA rack. The vertical channels shall accommodate plastic d-rings, plastic fingers and spools to provide vertical cable management. The channels shall have markings on the front and rear that indicate the location of each EIA rack space with numbering at every fifth space. The top of the rack shall have integrated waterfalls with bend radius control that feed to the front and center of the 6" deep vertical channels. The rack shall be capable of accepting steel, full length, hinged doors. The rack shall have a minimum load rating of 1500 lbs.

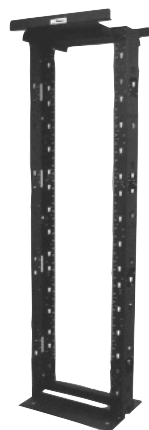

technical information

Dimensions:	DR84 (19") — 86.0"H x 23.75"W x 17.0"D (2183mm x 604mm x 432mm) DR84 (23") — 86.0"H x 27.75"W x 17.0"D (2183mm x 705mm x 432mm)
Standards:	Meets all EIA requirements as defined in EIA-310-D
Packaging:	Packaged with 2 vertical channels, top and bottom brackets, a grounding lug, assembly hardware and installation instructions

key features and benefits

24" footprint	Rack base fits within a 24" floor tile (when setup for 19" mounting) making it suitable for use in raised floor applications
Modular system	Multiple vertical cable management options and accessories install easily, allowing user to configure system to their preferences
Mounts as 19" or 23" EIA rack	Suitable for a variety of applications
Deep vertical channel	Provides pathway for distribution cable
Integrated waterfalls	Provides bend radius control for the cables to transition to the front and inside of the deep vertical channel
Rack space identification (numbered at every 5th position)	Allows for quick and easy location of rack spaces, speeding installation of horizontal rack mount items
1500 lb. load rating	Accommodates large networking equipment
Optional hinged metal door	Provides easy access to vertical pathway without having to completely remove door

applications

The NETRACK™ Cable Management Rack System is a modular rack system that is optimized for use in data centers and telecommunications rooms to support active equipment and manage network cabling. The 23.75" width allows user to stay within the footprint of a 24" floor tile in stand-alone and bayed configurations.

Multiple cable management options and accessories (d-rings, vertical managers, slack managers) allow the system to be used in a

variety of applications, while providing the user flexibility to configure rack systems to suit their specific needs. Additional features such as integral bend radius control and rack space identification, simplify and speed system installation.

All of these features combine to provide the user a complete cable management rack solution that simplifies and manages cable routing with low cost of installation and ownership.

NETRACK™ Cable Management Rack System

19" or 23" x 7': DR84

Vertical Cable Management

2" x 5" d-ring kit (8): CMVDR1-8

Bend radius fingers kit (8): NFBFRK

Front only, slotted duct 4" x 5" x 84": WMPVFM45

Front only, slotted duct 6" x 6" x 84": WMPVFMHC45

Hinged Metal Doors

2" x 7': DRD284

8" x 7': NFD884

12" x 7': NFD1284

Accessories

Ladder rack bracket: DRLRB

4" wide slack manager: NFVSM4

8" wide slack manager: NFVSM8

End panel: NFEP

Adjustable Mount Shelves

19"W x 18"D, 1 RU: SRM19X18A1

19"W x 25"D, 1 RU: SRM19X25A1


Troughs

19" upper: CMUT19

19" lower: CMLT19

19" : CMT4

NETRACK™ Cable Management Rack System

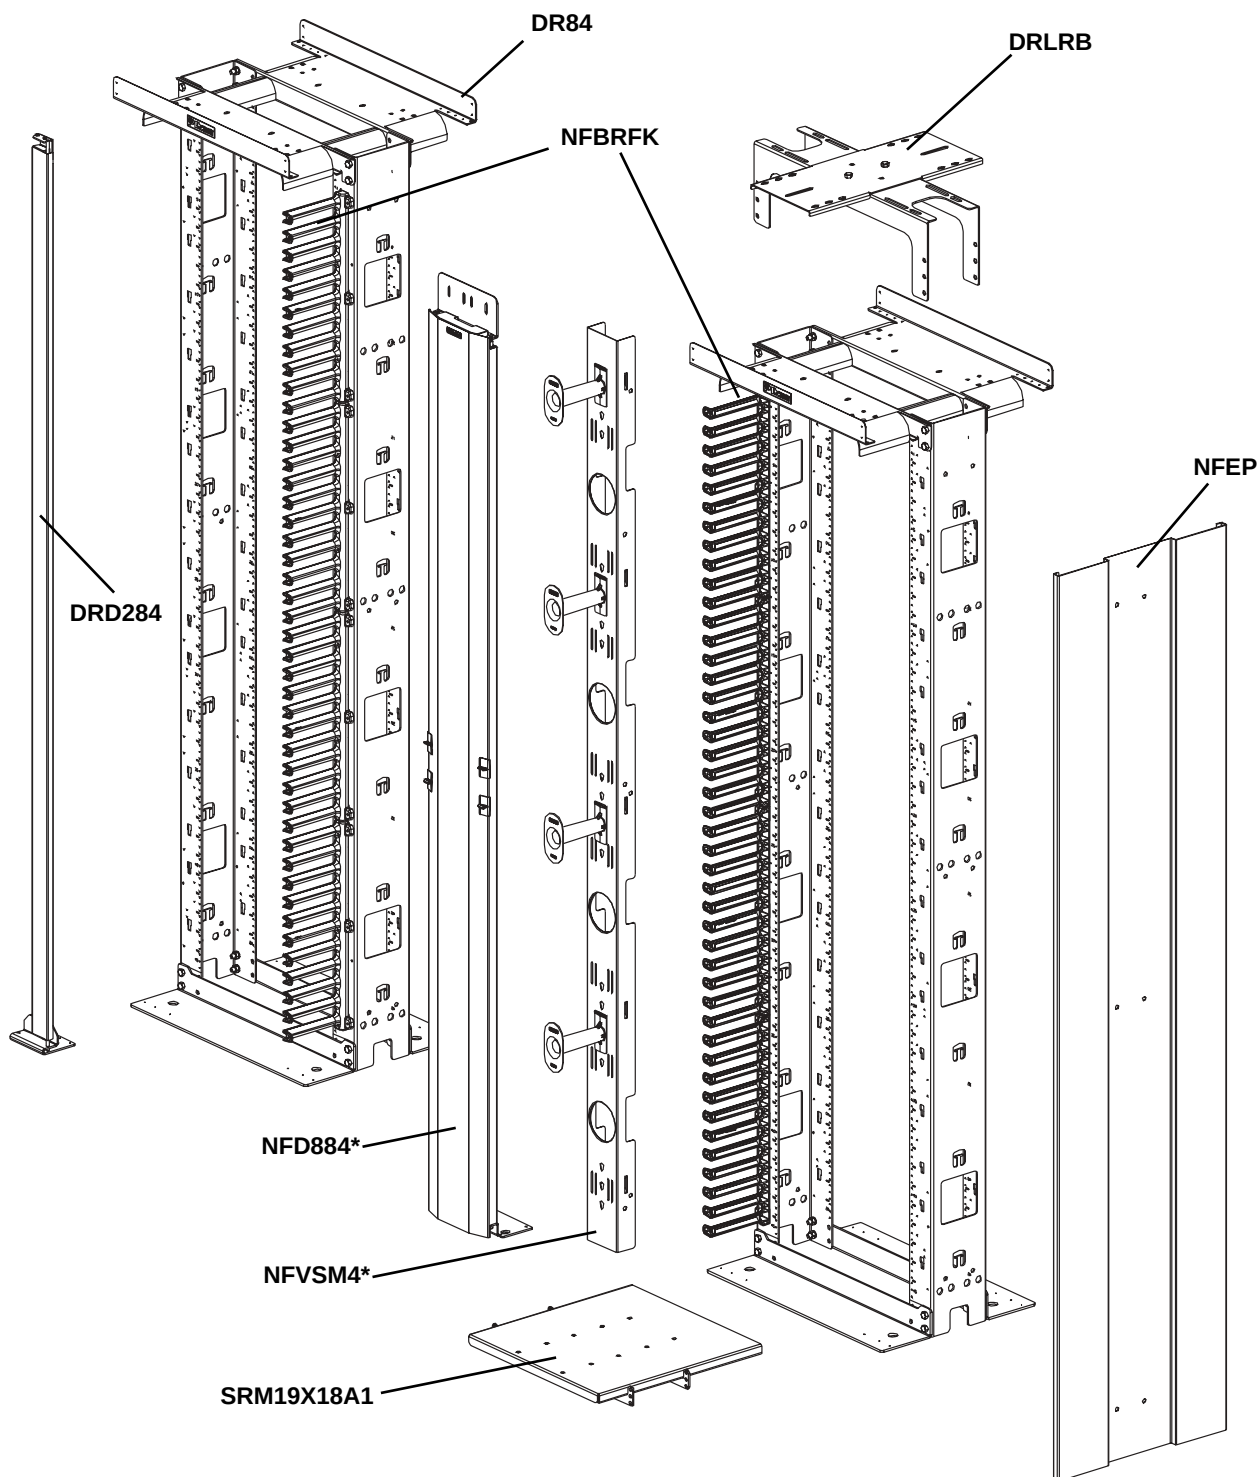

*Note: When using NFVSM8 use the NFD1284.

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6379.6700

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.3767.7011

PANDUIT LATIN AMERICA
Jalisco, Mexico
cs-la@panduit.com
Phone: 52.333.666.2501

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of PANDUIT product warranties, log on to www.panduit.com/warranty



For more information or to request a catalog

www.panduit.com

cs@panduit.com • 800-777-3300

©2004 PANDUIT Corp.
ALL RIGHTS RESERVED.
Printed in U.S.A.
WW-RKSP09
12/2004