
THIS COPY IS PROVIDED ON	A RESTRICTED BASIS AND IS NOT TO BE	USED IN ANY	WAY DETRIM	ENTAL TO THE INTER	ESTS OF PANDL	IIT CORP.
Material	High Conductivity Seamless Copper Tube					
Plating	Electro-Tin					
Wire Size	2 AWG	1				
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric	<del> </del>	INC #	00 00 00 00		
Wire Strip Length	1-1/4 in.	75±.04	PANDUII	N60 2 STR CU LCC2-00		
Stud Size	N/A 2	<b> </b>	[ <u> </u>			
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.		-		- 4.51±.06	
UL Temperature Rating	90° C					
C.S.A Certified Wire Connector	Yes					
Panduit Color Code on Barrel	BROWN					
Panduit Die Index No. on Barrel	P33		-	3.00±.04 -		<u> </u>
Alternate Industry Die Index No. ( ) on Barrel	(10)	<u></u>	- 08+01			



- Color coded barrel markings



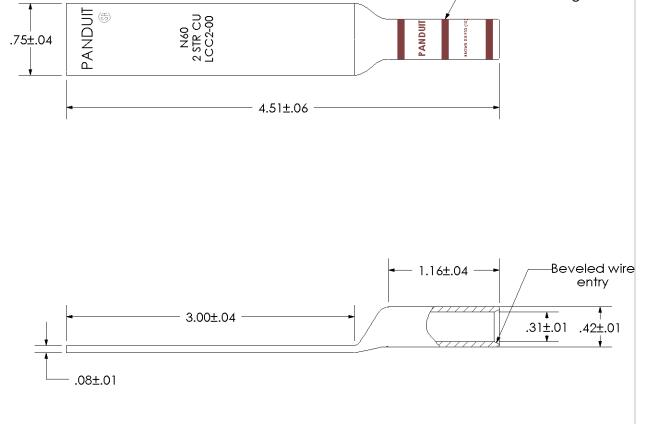

						CORP. TINLEY PARK, ILLINOIS
00	12/02	SAB	DRL	RELEASED	10333	LCC2-00-Q Copper Lug - Blank Tongue, Long Barrel
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE LCC2-00-CUST