


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT TOOL NO.	INSTALLS * THE FOLLOWING CABLE TIE CROSS-SECTIONS **	WEIGHT/PC	
		OZ	GRAMS
GTSL	SM,M,I,S	8.8	249

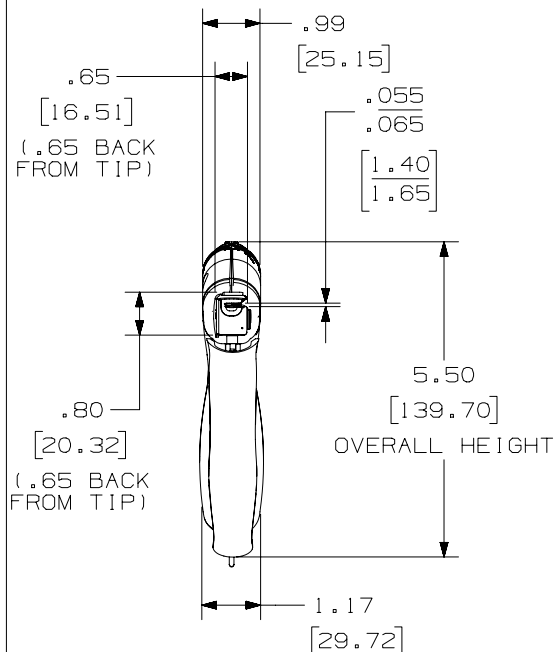


COARSE TENSION ADJUSTMENT KNOB

FINE TENSION ADJUSTMENT KNOB

TENSION SETTING LOCATOR

TENSION SETTING LABEL

BLADE GUARD

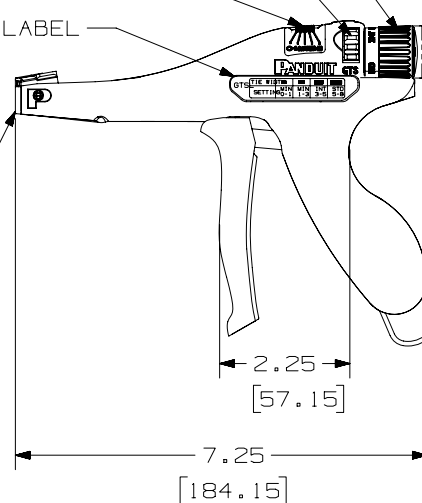

NOTES, UNLESS OTHERWISE SPECIFIED:

* THIS TOOL TIGHTENS CABLE TIES AND CUTS OFF EXCESS PORTION WHEN PRESET TENSION IS ATTAINED.

** CABLE TIE CROSS-SECTION CODE:
SM=SUBMINIATURE, M= MINIATURE
I= INTERMEDIATE, S= STANDARD.

SPECIFICATIONS SHOWN IN PARENTHESIS ARE METRIC.

REFERENCE:

KGTSBLD: REPLACEMENT BLADE KIT.
KGTSTL: TENSION LOCKING KIT.

WB24468D01: BLADE GUARD FOR *Contour-TY*

RETRACTABLE HANGER HOOK

OVERALL LENGTH										CAD FILENAME/LAYERS R24915BA_DS_WB24915B01_00A									
										PANDUIT CORP TINLEY PARK, ILLINOIS									
										CD, GTSL									
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± -- (.XXX) ± -- (.XX) ± -- ANGLES ± --					UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION				
										DRAWN BY DCS MAT'L: 1/2=1					SCALE				
OO	08-26-04	DCS	MBR	RELEASED	4140	--	DLWE			DATE 08-26-04	-----				DRAWING NO. WB24915B01	DWG B			
REV	DATE	BY	CHK	DESCRIPTION	ECN	-	R	CUST	SUP	CHK'D MBR					SIZE				