



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

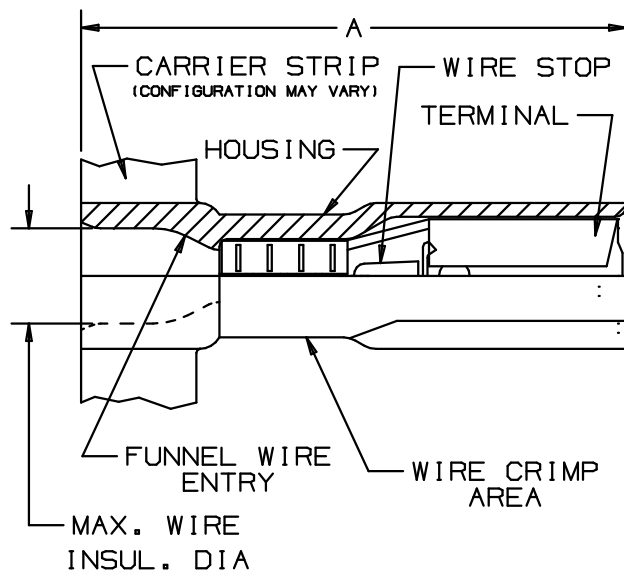

NOTES:

- UL LISTED AND CSA CERTIFIED FOR:
 - A. 600V MAX* VOLTAGE RATING *
 - B. 125°C (257°F) UL & 105°C (221°F) CSA MAX TEMP RATING
 - C. STRANDED COPPER WIRE ONLY
 - D. 26,7 - 53,4N INITIAL INSERTION/WITHDRAWAL FORCE
- PACKAGE QTY: 3K=3000 PIECES, CONTINUOUS MOLDED STRIP CARRIER
- MATERIAL:
 - A. STAMPING-CDA 260 BRASS, TIN PLATED
 - B. HOUSING-TYPE 66 NYLON
- DIMENSIONS IN BRACKETS ARE IN INCHES
- COLOR IS TRANSLUCENT
- UL LISTED AND CSA CERTIFIED FOR AWG WIRE ONLY
- WIRE STRIP LENGTH $5,6^{+.8}_{-.0}$ ($7/32^{+1/32}_{-.0}$)



*UL/CSA STANDARDS DO NOT EXIST FOR 2,8 X 0,3 RECEPTACLES.

		PANDUIT PRESS					
		CP-851 <i>DISCONTINUED</i>	CP-860 <i>DISCONTINUED</i>	CP-861	CP-862	CP-871 60HZ	CP-871/E 50HZ
APPLICATORS	CA-800		X	X			
	CA-800EZ	X				X	X
	CA9				X	X	X

PART NUMBER	TAB SIZE	WIRE RANGE mm ² (AWG)	COLOR (note 5)	MAX. INSUL.	DIMENSIONS mm		
					A ± 0,5 (.02)	B ± 0,3 (.01)	C ± 0,3 (.01)
DMNF1-288F1B-3K	2,8 X 0,8 (.110 X .032)	(0,5-1,0) 22-18	RED	3,0 (.12)	18,0 (.71)	4,8 (.19)	3,8 (.15)
DMNF1-285F1B-3K	2,8 X 0,5 (.110 X .020)	(0,5-1,0) 22-18	RED	3,0 (.12)	18,0 (.71)	4,8 (.19)	3,8 (.15)
DMNF1-283F1B-3K *	2,8 X 0,3 (.110 X .010)	(0,5-1,0) 22-18	NATURAL	3,0 (.12)	18,0 (.71)	4,8 (.19)	3,8 (.15)

A41644_03

03	3/06	DAW	DAW	ADDED PANDUIT PRESS & APPLICATOR CHART	TR00083			 TINLEY PARK, ILLINOIS REELSMART DISCO METRIC FULLY INSULATED FEMALE DISCONNECTS 2,8 X 0,8 & 2,8 X 0,5 & 2,8 X 0,3 TAB SIZES
02	11/04	KLFU	SKB	ADDED GEOMETRY; UPDATED TOOL CHART	12453	SKB	TRO	
01	7/98	TM	RLS	UPDATED WIRE RANGES AND PART NUMBERS	07035	LA	DH	
00	9/97	TM	WB	RELEASED	06192	LA	DH	
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY TSMa CHK'D WB SCALE NONE DRAWING NO. A41644