

Part number	mm* (AWG) Wire range	Color	Maximum insulation diameter
DMNF1-63FIM-2K	0,5-1,5 (22-18)	Red	3,4 (.13)
DMNF2-63FIM-2K	1,5-2,5 (16-14)	Blue	4,0 (.16)

Notes:

1. Used for:

- A. 600 V maximum rating
- B. 105°C (221°F) maximum temperature rating (CSA)
- C. 125°C (257°F) maximum temperature rating (UL)
- D. Stranded copper wire only

2. Wire strip length: $7,1^{+0,8}_{-0}$ ($9/32^{+1/32}_{-0}$)

3. Material:

- A. Stamping - .41 (.016) thick nickel plated brass
- B. Housing - Nylon



4. Package quantity:

-2K = 2000 pieces on continuously
molded carrier strip

5. Dimensions in brackets are in inches

6. UL listed and CSA certified for awg wire only.

		PANDUIT PRESS					
		CP-851 <i>DISCONTINUED</i>	CP-860 <i>DISCONTINUED</i>	CP-861	CP-862	CP-871 60HZ	CP-871/E 50HZ
APPLICATORS	CA-800		X	X			
	CA-800EZ	X				X	X
	CA9				X	X	X

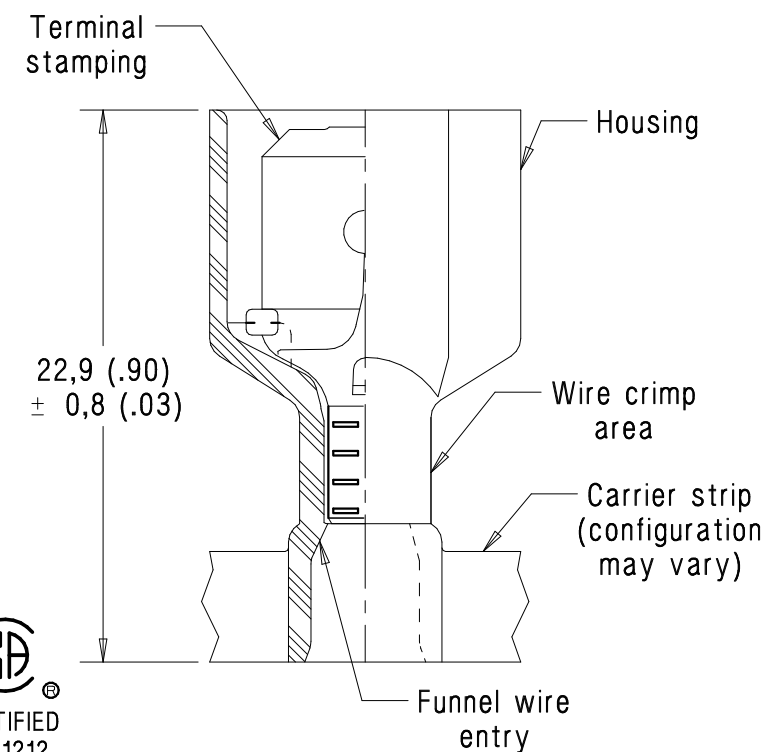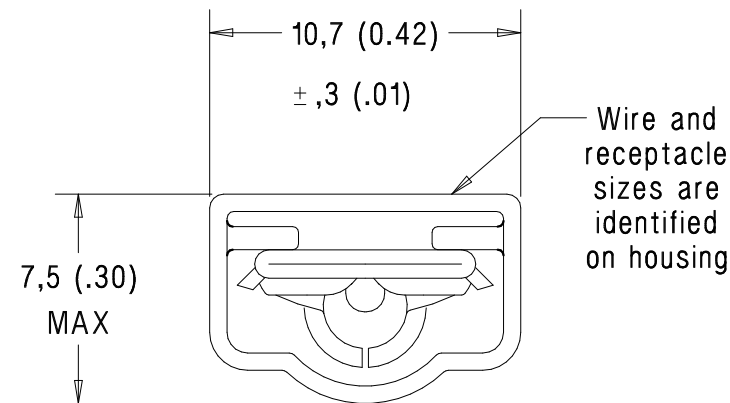

A41640_02

02	3/06	DAW	DAW	ADDED PANDUIT PRESS & APPLICATOR CHART	TR00083			 PANDUIT CORP. TINLEY PARK, ILLINOIS	
01	7/03	KLFU	SKB	ADDED INTERNAL SERRATIONS ADDED CP-862, CD9 & CA9 TO CHART	12453	TRO	SKB		
00	4/97	TM	WJB	RELEASED	6192	DH	LA	Disco™ Termo™ Metric Fully Insulated Male Disconnects 6,3 X 0,8 Tab size	
REV	DATE	BY	CHK	DESCRIPTION	ECN	PM	APP	DRAWN BY TSMA	CHK'D WJB
								SCALE NONE	DRAWING NO./CAD FILENAME A41640