



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

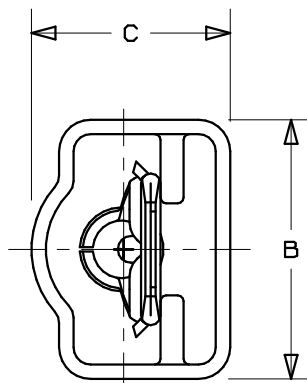

#### NOTES:

- UL LISTED AND CSA CERTIFIED FOR:
  - 600V MAX VOLTAGE RATING
  - 105°C (221°F) MAX TEMP RATING (CSA).
  - 125 °C (257°F) MAX. TEMP. RATING (UL).
  - STRANDED AWG COPPER WIRE ONLY
- PACKAGE QTY: 1K=1000 PIECES CONTINUOUS MOLDED STRIP CARRIER
- MATERIAL:
  - STAMPING- BRASS, NICKEL PLATED
  - HOUSING-TYPE 6/6 NYLON
- DIMENSIONS IN BRACKETS ARE IN INCHES
- COLORS ARE TRANSLUCENT
- WIRE STRIP LENGTH:  $7,1^{+0,8}_{-0}$  ( $9/32^{+1/32}_{-0}$ )

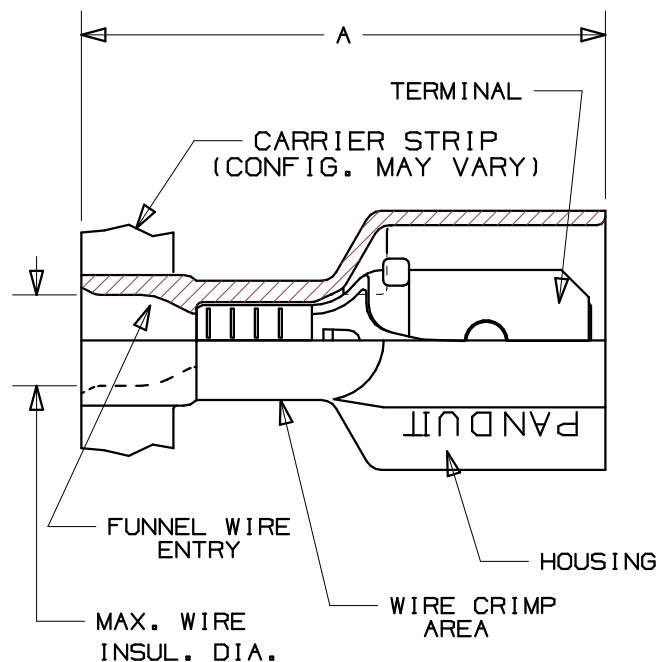

|             |          | PANDUIT PRESS                 |                               |        |        |                |                  |
|-------------|----------|-------------------------------|-------------------------------|--------|--------|----------------|------------------|
|             |          | CP-851<br><i>DISCONTINUED</i> | CP-860<br><i>DISCONTINUED</i> | CP-861 | CP-862 | CP-871<br>60HZ | CP-871/E<br>50HZ |
| APPLICATORS | CA-800   |                               | X                             | X      |        |                |                  |
|             | CA-800EZ | X                             |                               |        |        | X              | X                |
|             | CA9      |                               |                               |        | X      | X              | X                |

| PART NUMBER    | TAB SIZE                   | WIRE RANGE<br>AWG  | COLOR<br>(note 5) | MAX.<br>INSUL. | DIMENSIONS mm      |                    |                    |
|----------------|----------------------------|--------------------|-------------------|----------------|--------------------|--------------------|--------------------|
|                |                            |                    |                   |                | A ± $0,8$<br>(.03) | B ± $0,3$<br>(.01) | C ± $0,3$<br>(.01) |
| DMNF1-63FIMB-K | 6,3 X 0,8<br>(.250 X .032) | 0,5-1,0<br>(22-18) | RED               | 3,4<br>(.13)   | 23,1<br>(.91)      | 11,4<br>(.45)      | 8,6<br>(.34)       |
| DMNF2-63FIMB-K | 6,3 X 0,8<br>(.250 X .032) | 1,5-2,5<br>(16-14) | BLUE              | 4,1<br>(.16)   | 23,1<br>(.91)      | 11,7<br>(.46)      | 8,4<br>(.33)       |

A41641\_02

| 02  | 3/06 | DAW  | DAW | ADDED PANDUIT PRESS AND APPLICATOR CHART                                     | TRO0083 |      |     | <b>PANDUIT</b> CORP. TINLEY PARK, ILLINOIS<br><br>METRIC DISCO FULLY INSULATED UNI-MALE DISCONNECT 6,3 X 0,8 |
|-----|------|------|-----|------------------------------------------------------------------------------|---------|------|-----|--------------------------------------------------------------------------------------------------------------|
| 01  | 7/03 | KLFU | SKB | ADDED INTERNAL SERRATIONS; CP-862, CA9 & CD9 TO CHART WIRE RANGE 1,0 WAS 1,5 | 12453   | SKB  | TRO |                                                                                                              |
| 00  | 9/97 | TM   | WJB | DWG RELEASED                                                                 | 6192    | LA   | DH  |                                                                                                              |
| REV | DATE | BY   | CHK | DESCRIPTION                                                                  | ECN #   | CUST | PM  | DRAWN BY T SMA<br>CHK'D<br>SCALE<br>DRAWING NO. A41641                                                       |