

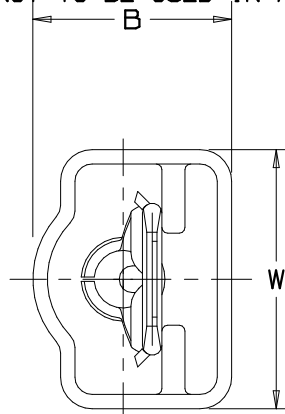


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

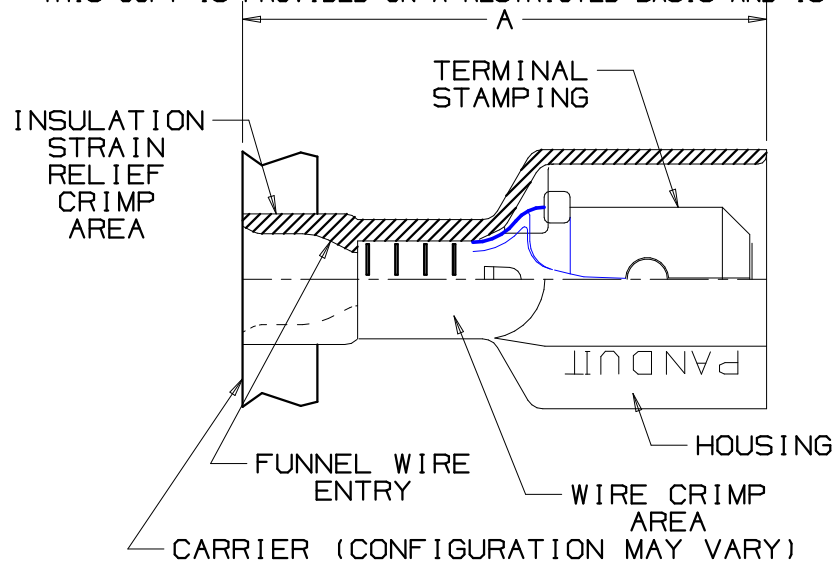

NOTES:


- USED FOR:
 - A. 600V MAX VOLTAGE RATING
 - B. 105°C (221°F) MAX TEMP RATING
 - C. STRANDED COPPER WIRE ONLY
- WIRE STRIP LENGTH: $7,1^{+.8}_{-.0}$ (9/32 $^{+.1/32}_{-.0}$)
- MATERIAL:
 - A. STAMPING: NICKEL PLATED BRASS
 - B. HOUSING: PREMIUM GRADE NYLON FOR SUPERIOR STRAIN RELIEF INSULATION CRIMPING
- PACKAGING: -2K = 2000 PCS CONTINUOUS MOLDED STRIP CARRIER
- DIMENSIONS IN BRACKETS ARE IN INCHES
- UL LISTED FOR AWG WIRE ONLY

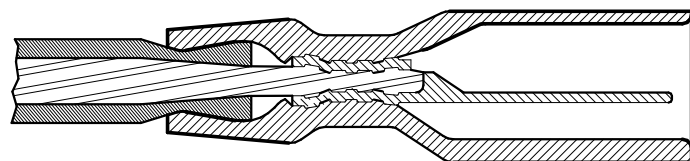

SECTION VIEW OF CRIMPED DISCONNECT

		PANDUIT PRESS					
		CP-851 <i>DISCONTINUED</i>	CP-860 <i>DISCONTINUED</i>	CP-861	CP-862	CP-871 60HZ	CP-871/E 50HZ
APPLICATORS	CA-800		X	X			
	CA-800EZ	X				X	X
	CA9				X	X	X

PART NUMBER		TAB SIZE	WIRE RANGE mm ² (AWG)	COLOR	MAX WIRE INSULATION DIAMETER	MIN WIRE INSULATION DIAMETER	DIMENSIONS mm		
PREFIX	PK						A ± .8 (.03)	B ± .5 (.02)	W ± .5 (.02)
DMPF1-63F1M	-2K	6,3 X 0,8 (.250 X .032)	0,5-1,5 (22-18)	RED	3,4 (.13)	1,5 (.06)	22,9 (.90)	7,4 (.29)	10,4 (.41)
DMPF2-63F1M	-2K	6,3 X 0,8 (.250 X .032)	1,5-2,5 (16-14)	BLUE	4,0 (.16)	2,3 (.09)	22,9 (.90)	7,4 (.29)	10,4 (.41)



A41630_02

02	3/06	DAW	DAW	ADDED PANDUIT PRESS & APPLICATOR CHART	TR00083			PANDUIT CORP. TINLEY PARK, ILLINOIS REELSMART™ DISCOGRIP™ METRIC PREMIUM NYLON FULLY INSULATED MALE DISCONNECT 6,3 X 0,8	
01	7/03	KLF	SKB	ADDED INTERNAL SERRATIONS ADDED CP-862, CA9 & CD9 TO CHART	12453	SKB	TRO		
00	9/97	TM	WJB	DWG RELEASED	6192	LA	DH		
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY T.SMA	CHK'D WJB

SCALE

DRAWING NO A41630