



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

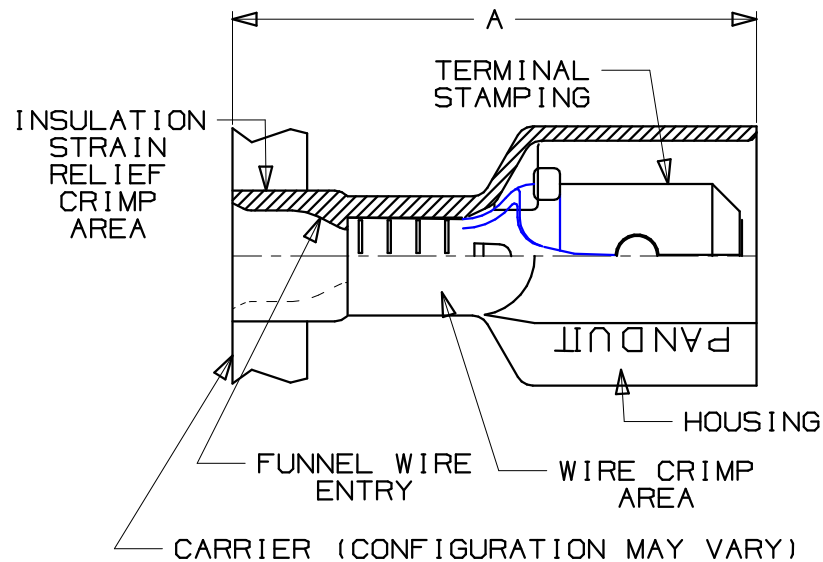

NOTES:

1. USED FOR:
A. 600V MAX VOLTAGE RATING
B. 105°C (221°F) MAX TEMP RATING
C. STRANDED COPPER WIRE ONLY
2. WIRE STRIP LENGTH: $7,1^{+.8}_{-0}$ ($9/32^{+.1/32}_{-0}$)
3. MATERIAL:
A. STAMPING: NICKEL PLATED BRASS
B. HOUSING: PREMIUM GRADE NYLON FOR SUPERIOR STRAIN RELIEF INSULATION CRIMPING
4. PACKAGING: -K = 1000 PCS CONTINUOUS MOLDED STRIP CARRIER
5. DIMENSIONS IN BRACKETS ARE IN INCHES
6. UL LISTED WITH AWG WIRE ONLY

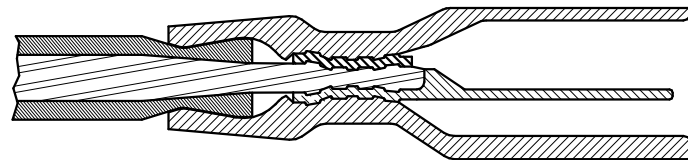

SECTION VIEW OF CRIMPED DISCONNECT

		PANDUIT PRESS					
		CP-851 <i>DISCONTINUED</i>	CP-860 <i>DISCONTINUED</i>	CP-861	CP-862	CP-871 60HZ	CP-871/E 50HZ
APPLICATORS	CA-800		X	X			
	CA-800EZ	X				X	X
	CA9				X	X	X

PART NUMBER		TAB SIZE	WIRE RANGE mm ² (AWG)	COLOR	MAX WIRE INSULATION DIAMETER	MIN WIRE INSULATION DIAMETER	DIMENSIONS mm		
PREFIX	PK						A ± .8 (.03)	B ± .5 (.02)	W ± .5 (.02)
DMPF1-63F1MB	-K	6,3 X 0,8 (.250 X .032)	0,5-1,5 (22-18)	RED	3,4 (.13)	1,5 (.06)	23,4 (.92)	8,6 (.34)	11,7 (.46)
DMPF2-63F1MB	-K	6,3 X 0,8 (.250 X .032)	1,5-2,5 (16-14)	BLUE	4,0 (.16)	2,3 (.09)	23,4 (.92)	8,6 (.34)	11,7 (.46)



A41634_02

								PANDUIT CORP. TINLEY PARK, ILLINOIS			
02	3/06	DAW	DAW	ADDED PANDUIT PRESS & APPLICATOR CHART	TR00083			REELSMART™ DISCOGRIP™ METRIC PREMIUM NYLON FULLY INSULATED UNIVERSAL MALE DISCONNECT 6,3 X 0,8			
01	7/03	KLFU		ADDED INTERNAL SERRATIONS ADDED CP-862, CD9 & CA9 TO CHART	12453	SKB	TRO				
00	9/97	TM	WJB	DWG RELEASED	6192	LA	DH				
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY TSM	CHK'D	SCALE 1/2"	DRAWING NO A41634