



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

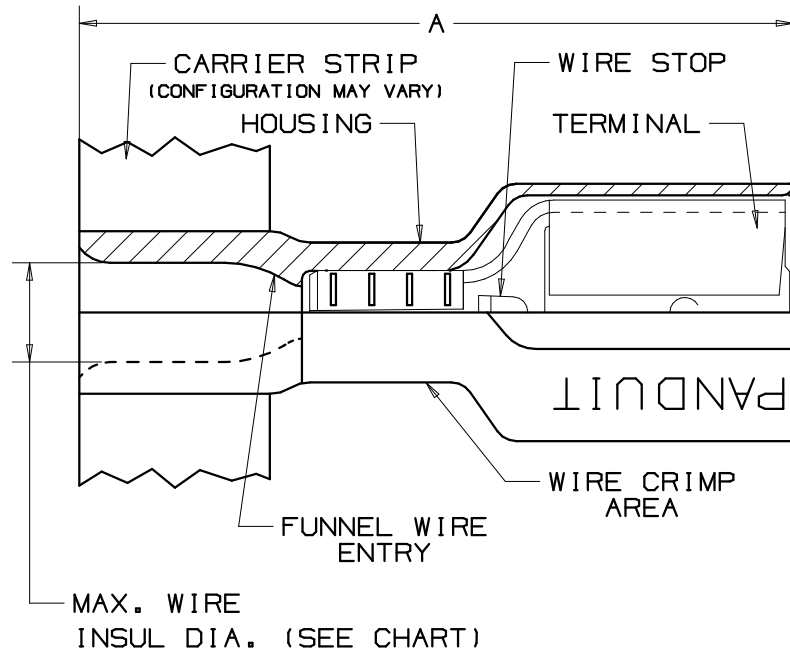

NOTES:

- USED FOR:
 - 600V MAX VOLTAGE RATING
 - 105°C (221°F) MAX TEMP RATING (CSA)
 - 125°C (257°F) MAX TEMP RATING (UL)
 - STRANDED COPPER WIRE ONLY
 - 26, 7-53, 4N INITIAL INSERTION/WITHDRAWAL FORCE
- PACKAGE QTY: -3K=3000 PIECE REEL
- MATERIAL:
 - STAMPING-CDA 260 BRASS, TIN PLATED
 - HOUSING-NYLON
- DIMENSIONS IN BRACKETS ARE IN INCHES
- NYLON HOUSING IS TRANSLUCENT
- WIRE STRIP LENGTH: $7,1 \pm 0,8$ ($9/32 \pm 1/32$)
- UL LISTED AND CSA CERTIFIED WITH AWG WIRE ONLY

		PANDUIT PRESS					
		CP-851 <i>DISCONTINUED</i>	CP-860 <i>DISCONTINUED</i>	CP-861	CP-862	CP-871 60HZ	CP-871/E 50HZ
APPLICATORS	CA-800		X	X			
	CA-800EZ	X				X	X
	CA9				X	X	X

PART NUMBER		TAB SIZE	WIRE RANGE mm ² (AWG)	COLOR (note 5)	MAX. INSUL. DIA.	DIMENSIONS mm		
PREFIX	PK					A $\pm 0,5$ (.02)	B $\pm 0,3$ (.01)	C $\pm 0,3$ (.01)
DMNF1-488F1B	-3K	4,8 X 0,8 (.187 X .032)	0,5-1,0 (22-18)	RED	3,4 (.14)	19,8 (.78)	7,4 (.29)	4,1 (.16)
DMNF1-485F1B	-3K	4,8 X 0,5 (.187 X .020)	0,5-1,0 (22-18)	RED	3,4 (.14)	19,8 (.78)	7,4 (.29)	4,1 (.16)
DMNF2-488F1B	-3K	4,8 X 0,8 (.187 X .032)	1,5-2,5 (16-14)	BLUE	4,0 (.16)	19,8 (.78)	7,4 (.29)	4,6 (.18)
DMNF2-485F1B	-3K	4,8 X 0,5 (.187 X .020)	1,5-2,5 (16-14)	BLUE	4,0 (.16)	19,8 (.78)	7,4 (.29)	4,6 (.18)



LISTED
20H3
E78522



CERTIFIED
LR31212

A41647_03

03	3/06	DAW	DAW	ADDED PANDUIT PRESS & APPLICATOR CHART	TR00083			 CORP. TINLEY PARK, ILLINOIS REELSMART METRIC FULLY INSULATED FEMALE DISCONNECTS 4,8 X 0,5 & 4,8 X 0,8 TAB SIZES
02	7/03	KLFU	SKB	ADDED INTERNAL SERRATIONS ADDED CP-862, CD9 & CA9 TO CHART	12453	SKB	TRO	
01	7/98	TM	RS	UPDATED WIRE RANGES AND PART NUMBERS	07035	LA	DH	
00	9/97	TM	WB	RELEASED	06192	LA	DH	
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY: TSM CHK'D: WB SCALE: NONE DRAWING NO.: A41647