


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AND TO INDICATE PACKAGE QUANTITY.
2. 110 CONNECTOR ON ONE END AND AN RJ45 MODULAR PLUG WIRED TO EIA/TIA 568B ON THE OTHER END. THE PATCH CORDS CAN BE USED FOR CISCO IN-LINE PROTOCOL DEVICES.
3. 110 CONNECTOR FEATURES INCLUDE A CLEAR CAP TO ENSURE PROPER CONNECTOR ORIENTATION, RETAINING CLIPS SECURE THE JACKET CLOSE TO THE POINT OF TERMINATION WHICH MINIMIZES WIRE UNTWISTING.
4. INTEGRAL STRAIN RELIEF MINIMIZES STRESS ON WIRES DURING DISCONNECTION.
5. POLARIZED TO PREVENT REVERSE INSTALLATION TO CONNECTOR BLOCK.

PANDUIT PART NUMBER	MIN. CABLE LENGTH	WEIGHT
P110PC41G8CY	6 FT.	1.63 LB/10 PCS 1.740 G/10 PCS
P110PC41G12CY	12 FT.	3.01 LB/10 PCS 1.368 G/10 PCS

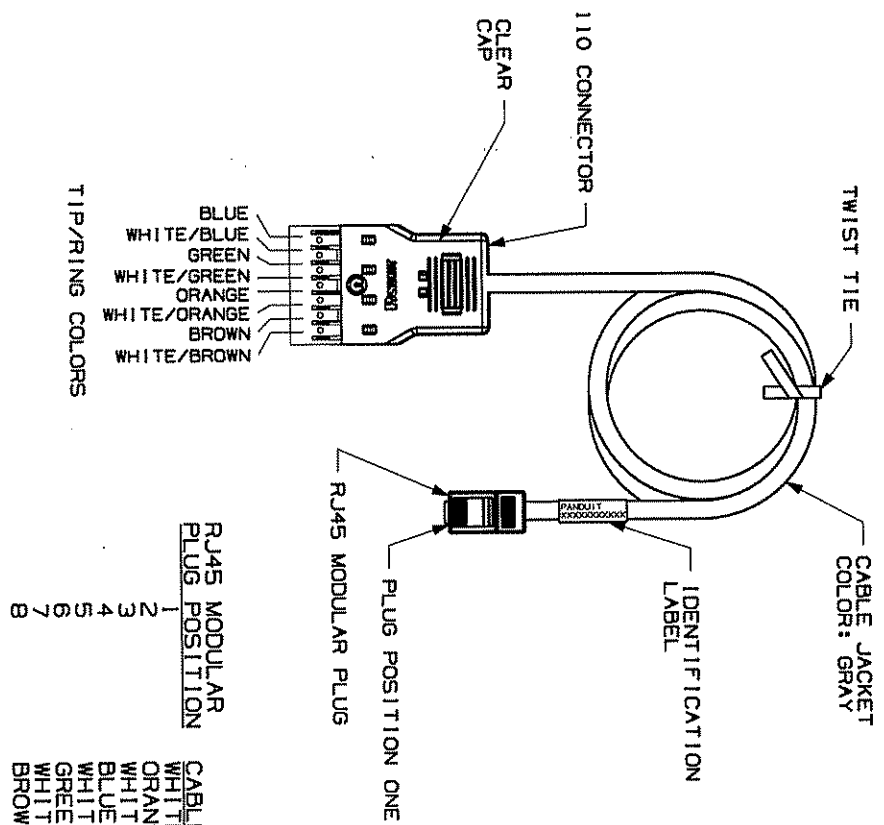

110 CONNECTOR

CLEAR CAP

TWIST TIE

CABLE JACKET COLOR: GRAY

IDENTIFICATION LABEL

RJ45 MODULAR PLUG POSITION ONE

RJ45 MODULAR PLUG POSITION

1 2 3 4 5 6 7 8

CABLE WIRE

WHITE/ORANGE

ORANGE

WHITE/GREEN

BLUE

WHITE/BLUE

GREEN

WHITE/BROWN

BROWN

TIP/RING COLORS

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	3-23-06	NER		RELEASED TO PRODUCTION	02479-331				
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH

MODEL FILENAME	SIZE
MO2479MR_DC331_00A.PRT	A

10/100 (110 TO RJ-45) EIA/TIA
568B LEGACY PATCH CORD
CUSTOMER DRAWING

PANDUIT CORP.™
TINLEY PARK, ILL. 60477

ALL DIMENSIONS ARE GIVEN IN INCHES.
UNLESS OTHERWISE SPECIFIED.

1. XX ±
1. XX ±
ANGLES ±

SCALE NONE

WORK INSTRUCTION

PRODUCT SPEC

1.1. NUMBER

DATE	THIRD ANGLE PROJECTION	REVIEW DRAWING NUMBERS	PART NO.	DRAWING NO.
3-23-06	NER		P110PC41G*CY	02479-331