



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	MINIMUM BUNDLE DIAMETER	MAXIMUM BUNDLE DIAMETER	PACKAGE QUANTITY	LENGTH = "L" ±.3 [7]	(G)
MLT2.7WLH-LP316	2.0" [51]	2.7" [69]	50	10.2" [259]	(A)
MLT4WLH-LP316	2.0" [51]	4.0" [102]	50	14.3" [362]	
MLT6WLH-LP316	2.0" [51]	6.0" [152]	50	20.5" [521]	
MLT8WLH-LP316	2.0" [51]	8.0" [203]	50	26.8" [679]	(B)

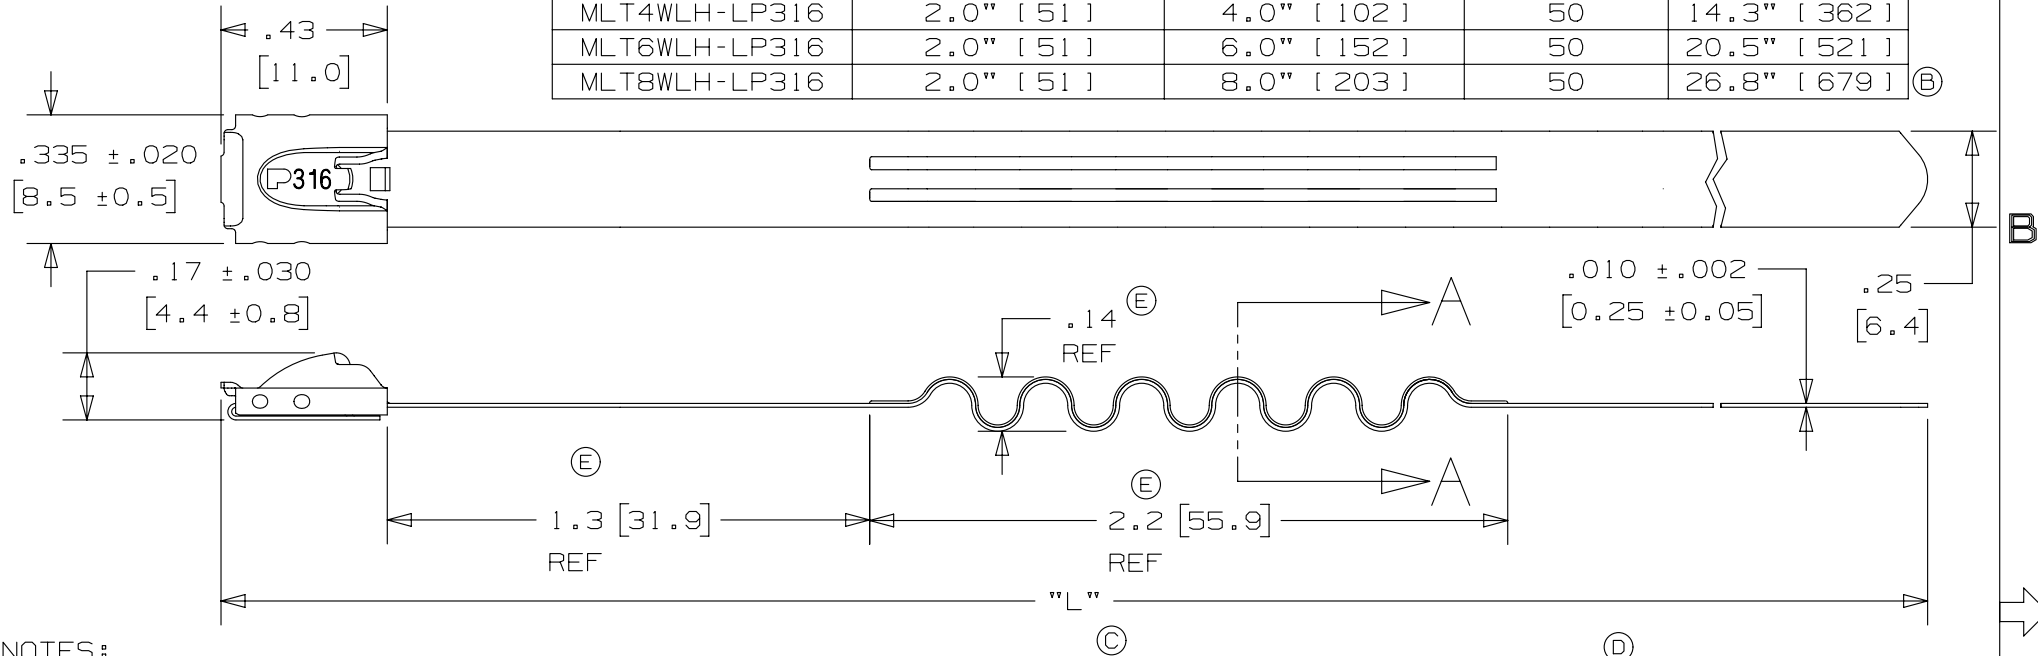

NOTES:

1. APPLICATION TOOLS - PPTMT, GS4MT, ST2MT, ST3MT, AND HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 250 LBS. (1112 NEWTONS) WHEN TESTED ON A 3" MANDREL.
PART NO. MLT2.7WLH-LP316 TESTED ON A 1 1/2" MANDREL.
3. [] DENOTES DIMENSION IN MILLIMETERS.
4. TOLERANCES: .XXX = ±.010 [.25]
.XX = ±.02 [.5]
.X = ±.03 [.8]
ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL

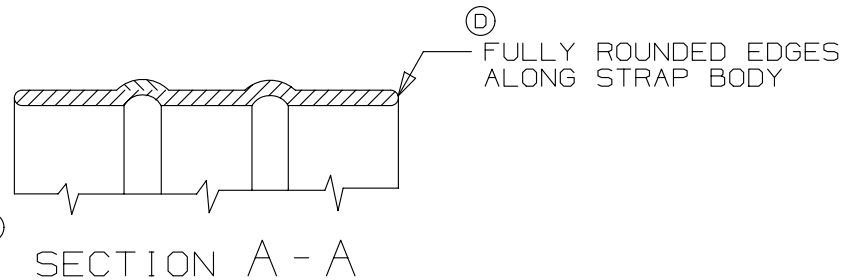

TITLE		WAVE-TY LIGHT-HEAVY	
CUSTOMER DRAWING			
ITEM REVISION NAME	N41138BS/05	PANDUIT	
DATASET FILE NAME	N41138BS/05		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL: 316 STAINLESS STEEL	
.x ± .1 [2.54] .xx ± .01 [.25]		.xxx ± .005 [.127] ANGLES ± 5 °	
THIRD ANGLE PROJECTION		DRAWING NUMBER: N41138BS_DC	
DRAWN BY JAMB	DATE 03/03	CHK DPN	SCALE 2:1
SHT 1 OF 1		SIZE A	