

## Products

[Products Overview](#)[Product Search](#)[Evaluate](#)[- FAQ's](#)[Design a Solution](#)[- Part Drawings](#)[- PDF-Fiber Optic ..](#)[How to Buy](#)[- Bill of Material](#)[- Favorite Products List](#)[- Locate Distributor](#)


## Home &gt; Products Overview &gt; Product Search &gt;

Current refinements (click  to remove) [Search Tips](#) 

## Part Number &gt; F9LD3-3M8

Your search criteria matched only one product

## F9LD3-3M8

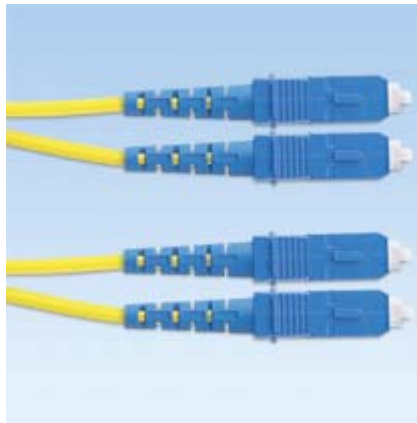

- Pass all TIA/EIA-568-B.3 performance requirements
- 100% factory inspected end face geometry
- Typical insertion loss per connection: 0.2 dB
- UPC polished (55dB minimum return loss)
- Factory terminated and 100% tested for performance
- Insertion loss and return loss data recorded
- Lifetime traceability of test data to a Q.C. report
- Highest quality flame retardant fiber optic cable

|                          |                                         |
|--------------------------|-----------------------------------------|
| ■ Part Number            | F9LD3-3M8                               |
| ■ RoHS Compliancy Status | RoHS directive is not applicable        |
| ■ Note                   | Intended for use in fixed installations |
| ■ Product Type           | SC Patch Cords                          |
| ■ Length (m)             | 8                                       |
| ■ Fiber Compatibility    | 9/125µm                                 |
| ■ Fiber Cable Size       | 3mm                                     |
| ■ Fiber Cable Type       | Jacketed                                |
| ■ Fiber Type             | Singlemode                              |
| ■ Cable Color            | Yellow                                  |
| ■ Cable Type             | Duplex                                  |
| ■ CE Compliant           | No                                      |
| ■ Connector 1 Type       | SC Connector                            |
| ■ Connector 2 Type       | SC Connector                            |
| ■ End Configurations     | SC to SC                                |
| ■ Fiber Count            | 2                                       |
| ■ Flammability Rating    | Low Smoke Zero Halogen (LSZH)           |
| ■ Pricing Description    | SC-SC LSZH 9µm Dupl 3mm                 |

|                                |                                |
|--------------------------------|--------------------------------|
| ■ Min. Order UOM               | PC                             |
| ■ Min. Order Qty.              | 1                              |
| ■ BOM Qty. (# of Pkgs.)        | <input type="text" value="0"/> |
| ■ Add to Favorite Product List | <input type="checkbox"/>       |

Please [register](#) to utilize the 'Bill of Materials', 'Submit Quotes' a

[Home](#) | [Industries](#) | [Solutions](#) | [Services](#) | [Products](#) | [Partners](#) | [Support](#) | [Contact Us](#)  
Copyright © 1995-2012, PANDUIT CORP. All rights reserved. | [Legal Information](#)