

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

HSTTN 12 - C Y


PANDUIT NUMBERING SYSTEM

ⓑ RoHS COMPLIANT

REEL QUANTITY: Q = 25' (7.60m)  
C = 100' (30.5m)

EXPANDED I.D. TUBING SIZE.

CHLORINATED POLYOLEFIN Ⓒ  
THIN WALL HEAT SHRINK TUBING.

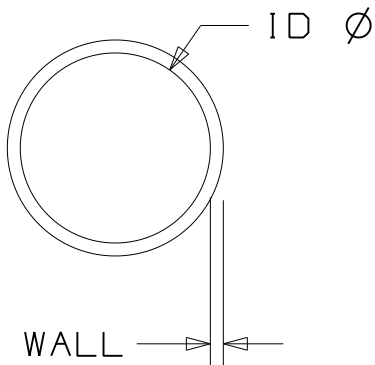

**NOTES:**

1. MATERIAL: CHLORINATED POLYOLEFIN Ⓒ  
HSTTN300-QY IS ELASTOMER NEOPRENE.
2. COLOR: BLACK
3. SHRINK RATIO: 2:1
4. SHRINK RATIOS ARE APPROXIMATIONS; PLEASE REFER TO DIMENSIONAL TABLE FOR THE EXACT MINIMUM EXPANDED AND MAXIMUM RECOVERED I.D.'S
5. "ALL WARRANTIES, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE EXCLUDED. (USER IS RESPONSIBLE TO DETERMINE SUITABILITY OF PRODUCT FOR INTENDED USE.)"

| PANDUIT PART NUMBER | Min. EXPANDED ID | Max. RECOVERED ID | NOMINAL REC. WALL THICKNESS [in. (mm)] |
|---------------------|------------------|-------------------|----------------------------------------|
| HSTTN25-CY          | .250<br>(6.4)    | .143<br>(3.6)     | 0.035±0.010<br>(0.9± 0.3)              |
| HSTTN38-CY          | .375<br>(9.5)    | .211<br>(5.4)     | 0.040±0.010<br>(1.0± 0.3)              |
| HSTTN50-CY          | .500<br>(12.7)   | .286<br>(7.3)     | 0.048±0.015<br>(1.2± 0.4)              |
| HSTTN63-CY          | .625<br>(15.9)   | .357<br>(9.1)     | 0.052±0.015<br>(1.3± 0.4)              |
| HSTTN75-CY          | .750<br>(19.1)   | .428<br>(10.9)    | 0.057±0.015<br>(1.5± 0.4)              |
| HSTTN88-CY          | .875<br>(22.2)   | .500<br>(12.7)    | 0.065±0.020<br>(1.7± 0.5)              |
| HSTTN100-CY         | 1.00<br>(25.4)   | .570<br>(14.5)    | 0.070±0.020<br>(1.8± 0.5)              |
| HSTTN125-CY         | 1.25<br>(31.8)   | .714<br>(18.1)    | 0.087±0.020<br>(2.2± 0.5)              |
| HSTTN150-CY         | 1.50<br>(38.1)   | .857<br>(21.8)    | 0.095±0.020<br>(2.4± 0.5)              |
| HSTTN175-CY         | 1.75<br>(44.5)   | 1.00<br>(25.4)    | 0.107±0.020<br>(2.7± 0.5)              |
| HSTTN200-QY         | 2.00<br>(50.8)   | 1.14<br>(29.0)    | 0.110±0.020<br>(2.8± 0.5)              |
| HSTTN300-QY         | 3.00<br>(76.2)   | 1.71<br>(43.4)    | 0.125±0.020<br>(3.8± 0.5)              |

Ⓐ

DIMENSIONS IN BRACKETS ARE METRIC [ mm ]

CAD FILENAME/LAYERS

G00239KJ\_PB\_HSTTN\_02A

**PANDUIT**

CORP.

TINLEY PARK, ILLINOIS

CHLORINATED POLYOLEFIN THIN WALL HEAT SHRINK (HSTTN)

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:

(.X) ±0.05 (1.3) (.XXX) ±0.010 (0.25)  
(.XX) ±0.02 (0.5) ANGLES ± 5°

UNLESS OTHERWISE SPECIFIED,

ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY  
LEF

MAT'L:

SCALE NONE

DATE  
9/29/10

SEE NOTES

DRAWING NO.

G00239KJ

DWG  
A  
SIZE

|     |         |     |     |                                                                          |          |      |      |  |
|-----|---------|-----|-----|--------------------------------------------------------------------------|----------|------|------|--|
| 2   | 4/6/11  | LEF | JVL | Ⓒ REMOVE REF. TO NEOPRENE WITH CHLORINATED POLYOLEFIN                    | G00239KJ | 2    | RAMI |  |
| 1   | 9/29/10 | LEF | VJS | ⓑ ADDED "Y" REF. FOR ROHS COMPLIANT<br>Ⓐ ADDED "Y" TO THE PANDUIT PART # | G00239KJ | 1    | RAMI |  |
| R   | 5/12/03 | LGG |     | INITIAL RELEASE                                                          | GB0239KJ | R    |      |  |
| REV | DATE    | BY  | CHK | DESCRIPTION                                                              | ECN - R  | CUST | SUP  |  |