Current refinements (click ☒ to remove) Search Tips

Part Number > **HSTTT131-48-2**

Your search criteria matched only one product, shown below

HSTTT131-48-2

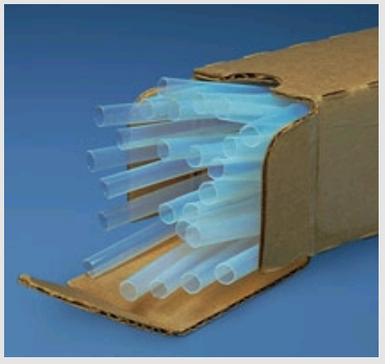

- Applications include insulating, protecting, and color coding wires and cables
- Widest temperature range of any plastic material
- Voltage: 600V
- Shrink ratio: 2:1
- Mil Spec: AMS-DTL-23053/12 Class 3
- Temperature range: -400°F to 500°F (-240°C to 260°C)
- Color: Opaque
- For dry locations
- Material: Polytetrafluroethylene (TFE)

Part Number	HSTTT131-48-2
RoHS Compliancy Status	Compliant
Part Description	Semi-rigid highly heat resistant Teflon* Heat Shrink offers widest temperature range of any heat shrink material.
Material	TFE Teflon*
Color	Milky clear
CSA Certified	No
Military Specification	AMS-DTL-23053/12 Class 3 (material performance only)
Length (ft.)	4
Length (m)	1.2
CE Compliant	No
Max. Recovered I.D. (In.)	0.911
Max. Recovered I.D. (mm)	23.1
Min. Expanded I.D. (In.)	1.31
Min. Expanded I.D. (mm)	33.3
Nominal Diameter / Size	1 5/16
Nominal Recovered Wall Thickness (In.)	0.030
Nominal Recovered Wall Thickness (mm)	0.8
Pricing Description	Heat Shrink Thin, Teflon, 1.31"(33.3mm) Dia
Shrink Ratio	2:1
Temperature Range	-88°F – 482°F (-67°C – 250°C)
Type	DRY-SHRINK Thin Wall TFE Heat Shrink
Min. Order UOM	PC
Min. Order Qty.	2
BOM Qty. (# of Pkgs.)	0
Add to Favorite Product List	e

Please register to utilize the 'Bill of Materials', 'Submit Quotes' and 'Favorite Product List' features.

Copyright © 1995-2012, PANDUIT CORP. All rights reserved. | Legal Information | Privacy Policy