

Wire And Cable Products > Twisted Pair Cable

Purchase items directly from TE.com

44AM1141-22-MST4-9CS2275

ACTIVE

44AM1141-22-MST4-9CS2275



Raychem

TE Internal #: **228339-000**

TE Internal Description: **44AM1141-22-MST4-9CS2275**

Mil-Spec: **M27500-22ML4T08**

Alias #: **1-1191680-0**

Cable Type : **MIL-DTL-27500**

Voltage Rating (VAC): **600**


Insulation Material : **Modified Radiation Cross-linked PVDF**

Conductor Material : **Tin-Coated Copper**

Wire Size (AWG): **22**

Add to List

Compatible Parts & Tooling

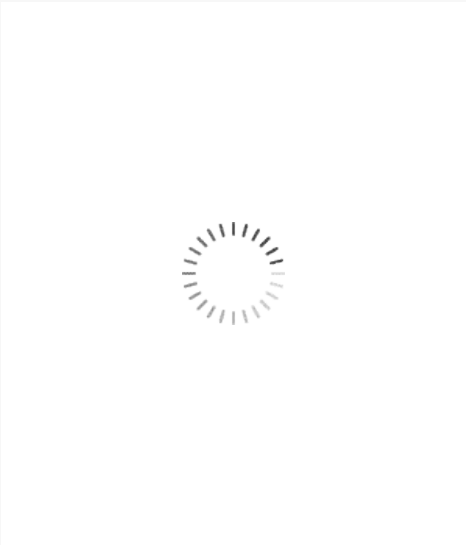

Documents	Features	Product Compliance
Product Drawings	FOUR CONDUCTOR CABLE, RADIATION-CROSSLINKED, POLYALKENE-INSULATED, SHIELDED, JACKETED, LIGHTWEIGHT, GENERAL PURPOSE, 600 VOLT tif English 44AM1141-22-MST4-9CS2275  44AM1141-22-MST4-9CS2275 English	
Datasheets & Catalog Pages	1654025_Sec9_SPEC44  ENG_CS_1654025_Sec9_SPEC44_0313.pdf English	
Product Specifications	Product Specification  ENG_SS_SPEC44_5.pdf English	
Please review product documents or contact us for the latest agency approval information. Please Note: Use the Product Drawing for all design activity.		
Product Type Features	Cable Type : MIL-DTL-27500	
Electrical Characteristics	Voltage Rating (VAC): 600	

Body Features	Insulation Material : Modified Radiation Cross-linked PVDF Conductor Material : Tin-Coated Copper
Dimensions	Wire Size (AWG): 22
Usage Conditions	Operating Temperature Range (°C): -65 – 150

[ABOUT TE CONNECTIVITY](#)[FOR PARTNERS](#)[SUPPORT](#)[CALL US](#)[LIVE CHAT](#)[UNITED STATES \(EN\)](#)