

Data Sheet

RP043xxHBLD

Page 1/4


P/N

316131xx

xx=number of poles

2015/02/06

Illustration

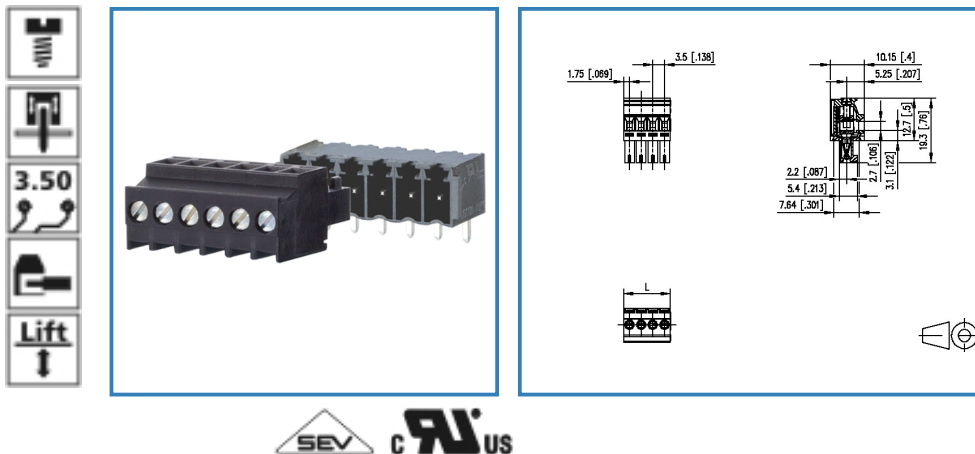

see enlarged drawing at the end of the document

Product specification

- screw type terminal block, pluggable
- centerline 3.50 mm, direction of connection 90°
- lift system, fittable without loss of poles
- color black
- wire entry codeable side perpendicular to plug direction
- Connection data

CRIUS V / A / AWG 300 / 10 / 28 - 16

SEV 10 A / 130 V / 2.5 kV / 3 / IEC 61984 / 0.34 - 1 mm²



Data Sheet

RP043xxHBLD

Page 2/4

P/N

316131xx

xx=number of poles

2015/02/06

Technical Data

General Data

Tightening torque SEV	0.25 Nm		
Tightening torque UL	2.2 lb-in		
min. number of poles	2		
max. number of poles	24		
Insulating material class	CTI 600		
clearance/creepage dist.	2.7 mm		
protection category	IP 20		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	200 V	500 V	500 V
Rated test voltage	2.5 kV	2.5 kV	2.5 kV

Connection data

extended wiring UL	Erweiterter Leiteranschluss bis AWG 16 Volldraht.
 V / A / AWG	300 / 10 / 28 - 16
	10 A / 130 V / 2.5 kV / 3 / IEC 61984 / 0.34 - 1 mm ²

Material

insulating material	PA66
flammability class	V0
contact material	CuSn
contact surface	Sn
terminal body material	CuZn
terminal body surface	Ni
screw surface	Zn Cr(VI)-frei/free
screw thread	M2

Climatic properties

upper limit temperature	105 °C
lower limit temperature	-40 °C

General

Tolerance	ISO 2768 -mH
-----------	--------------

Data Sheet

RP043xxHBLD

Page 3/4

P/N

316131xx

xx=number of poles

2015/02/06

Matching Part

P/N	Product name
311881	PR043xxHBBN Typ 188
311891	PR043xxVBBN Typ 189
313421	PT093xxHBBN Typ 342
313431	PT093xxVBBN Typ 343




Data Sheet

RP043xxHBLD

Illustration

Drawing

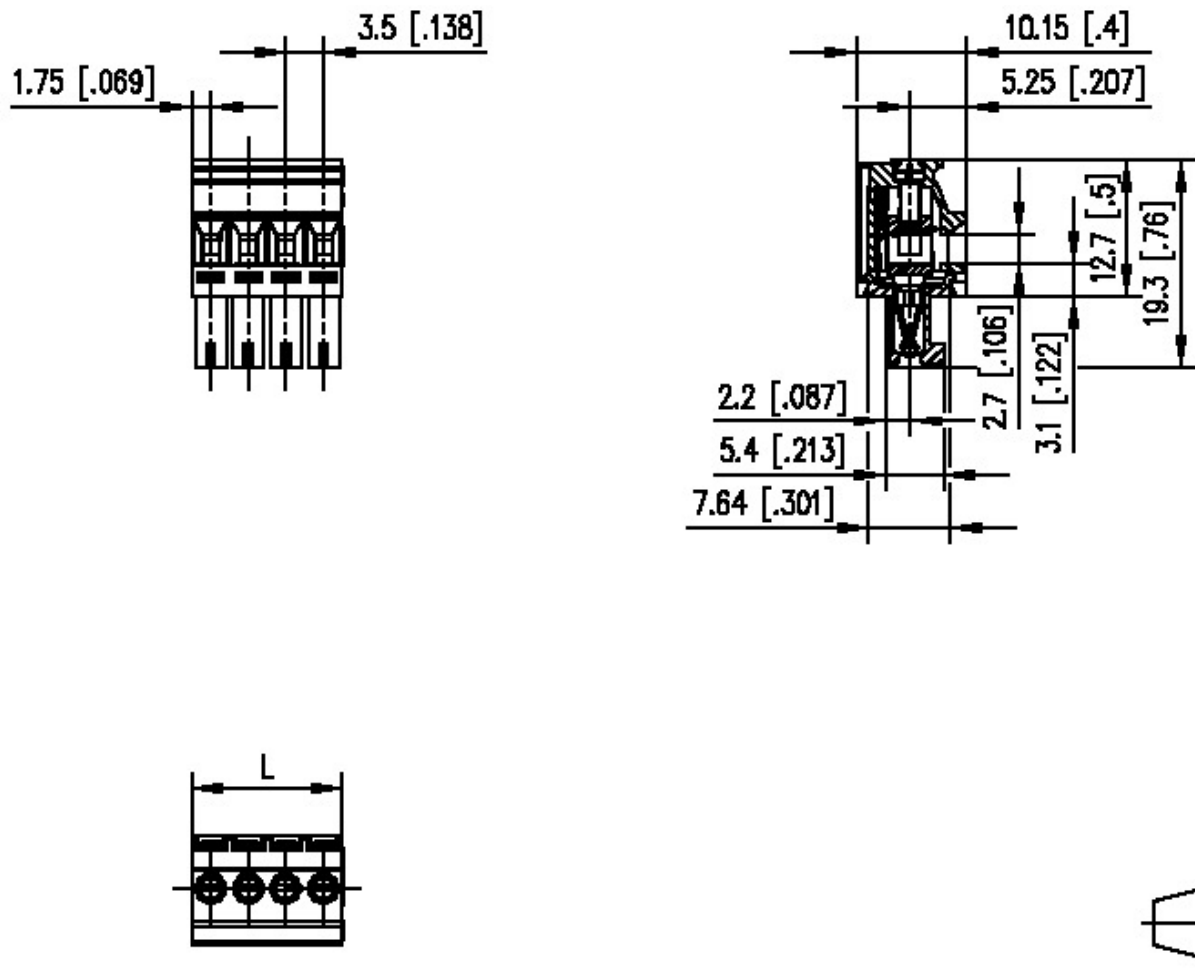

$L = (\text{pole size} - 1) \times \text{centerline} + 3.5 [0.138]$

