


Frame type plug in unit kit, shielded (textile), with hood, 3 U

SCHROFF



Cross-section: 5 HP: 3 U-A=17.52 mm, 6 U-A=17.22 mm; 6 HP: 3 U-A=22.60 mm, 6 U-A=22.30 mm; 7 HP: 3 U-A=27.68 mm, 6 U-A=27.38 mm; 10 HP: 3 U-A=42.92 mm, 6 U-A=42.92 mm; 12 HP: 3 U-A=53.08 mm, 6 U-A=53.78 mm; 14 HP: 3 U-A=63.24 mm, 6 U-A=63.24 mm

Other Views

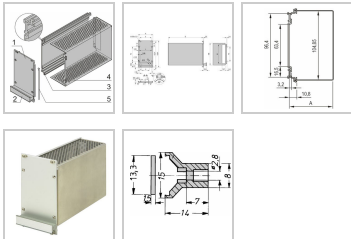

Catalog Number: 24813-060

Back To Product

- Protects a PCB against mechanical damage and discharges electrostatic buildup; for euroboard formats
- Fits all subracks and the following case series: RatiopacPRO/-air, PropacPRO and CompacPRO
- Connectors usable under EN 60603-2 (DIN 41612)
- For 220 mm boards

Material and Surface Finish:

Al, Front Anodized - Rear Conductive

EMC Shielding:

Shielded (Textile Gasket)

Type:

Kits

Mechanical Shielding:

Component Side, Solder Side and Hood

Cooling:

Perforations



Select product specifications before modifying or adding to project list or requesting a quote.

Height-U-defining

Depth-mm-defining

Width-HP-defining

[Clear Selection](#)

Quantity

Add Item to Project List +

Documents

-  Main Catalog - Plug In Units Frame Type
-  User manual

Links

-  General description of PRO frame type plug-in units
-  Native CAD files

Technical Data

Qty	1 piece
Depth mm	227.0
Description	Hood
For case height [U]	128.4
Thickness mm	2.5
Height U	3
Width HP	10

EXPLORE

- About Us
- Services & Capabilities
- News & Events
- Newsletter Subscriptions

CONTACT

- Customer Service
- Find a Sales Office or Distributor
- Global Locations
- Product Compliance & Certifications

DOWNLOAD

- Download Center
- Reference Projects
- Videos
- Product Configurators

Connect With Us

