# **SIEMENS**

Data sheet 3RT2016-2FB41

Power contactor, AC-3 9 A, 4 kW / 400 V 1 NO, 24 V DC with diode integrated, 3-pole, Size S00, Spring-type terminal



Product brand name	SIRIUS
Product designation	Power contactor
Product type designation	3RT2

General technical data	
Size of contactor	S00
Product extension	
<ul> <li>function module for communication</li> </ul>	No
Auxiliary switch	Yes
Surge voltage resistance	
<ul> <li>of main circuit rated value</li> </ul>	6 kV
<ul> <li>of auxiliary circuit rated value</li> </ul>	6 kV
maximum permissible voltage for safe isolation	
<ul> <li>between coil and main contacts acc. to EN</li> </ul>	400 V
60947-1	
Protection class IP	
• on the front	IP20
of the terminal	IP20
Shock resistance at rectangular impulse	
• at DC	6,7g / 5 ms, 4,2g / 10 ms

Shock resistance with sine pulse	
• at DC	10,5g / 5 ms, 6,6g / 10 ms
Mechanical service life (switching cycles)	
of contactor typical	30 000 000
of the contactor with added electronics-	5 000 000
compatible auxiliary switch block typical	
<ul> <li>of the contactor with added auxiliary switch</li> </ul>	10 000 000
block typical	
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	K
Reference code acc. to DIN EN 81346-2	Q
Neierence code acc. to bill Liv 010-10-2	Q
Ambient conditions	
Installation altitude at height above sea level	0.000
• maximum	2 000 m
Ambient temperature	25 100 %
• during operation	-25 +60 °C
during storage	-55 +80 °C
Main circuit	
Number of poles for main current circuit	3
Number of NO contacts for main contacts	3
Operating voltage	
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V
Operating current	
● at AC-1 at 400 V	
— at ambient temperature 40 °C rated value	22 A
• at AC-1	
<ul> <li>up to 690 V at ambient temperature 40 °C rated value</li> </ul>	22 A
<ul> <li>up to 690 V at ambient temperature 60 °C rated value</li> </ul>	20 A
• at AC-2 at 400 V rated value	9 A
• at AC-3	
— at 400 V rated value	9 A
— at 500 V rated value	7.7 A
— at 690 V rated value	6.7 A
• at AC-4 at 400 V rated value	8.5 A
• at AC-5a up to 690 V rated value	19.4 A
• at AC-5b up to 400 V rated value	7.4 A
• at AC-6a	
<ul> <li>up to 230 V for current peak value n=20 rated value</li> </ul>	5.3 A

<ul> <li>up to 400 V for current peak value n=20 rated value</li> </ul>	5.3 A
<ul> <li>up to 500 V for current peak value n=20 rated value</li> </ul>	5.3 A
<ul> <li>up to 690 V for current peak value n=20 rated value</li> </ul>	5 A
• at AC-6a	
<ul> <li>up to 230 V for current peak value n=30 rated value</li> </ul>	3.5 A
<ul> <li>up to 400 V for current peak value n=30 rated value</li> </ul>	3.5 A
<ul> <li>up to 500 V for current peak value n=30 rated value</li> </ul>	3.6 A
<ul> <li>up to 690 V for current peak value n=30 rated value</li> </ul>	3.3 A
Minimum cross-section in main circuit	
• at maximum AC-1 rated value	4 mm²
Operating current for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	4.1 A
• at 690 V rated value	3.3 A
Operating current	
• at 1 current path at DC-1	
— at 24 V rated value	20 A
— at 110 V rated value	2.1 A
— at 220 V rated value	0.8 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.6 A
<ul><li>with 2 current paths in series at DC-1</li></ul>	
— at 24 V rated value	20 A
— at 110 V rated value	12 A
— at 220 V rated value	1.6 A
— at 440 V rated value	A 8.0
— at 600 V rated value	0.7 A
<ul> <li>with 3 current paths in series at DC-1</li> </ul>	
— at 24 V rated value	20 A
— at 110 V rated value	20 A
— at 220 V rated value	20 A
— at 440 V rated value	1.3 A
— at 600 V rated value	1 A
Operating current	
• at 1 current path at DC-3 at DC-5	
— at 24 V rated value	20 A

— at 110 V rated value	0.1 A
<ul> <li>with 2 current paths in series at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	20 A
— at 110 V rated value	0.35 A
<ul> <li>with 3 current paths in series at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	20 A
— at 110 V rated value	20 A
— at 220 V rated value	1.5 A
— at 440 V rated value	0.2 A
— at 600 V rated value	0.2 A
Operating power	
• at AC-1	
— at 230 V rated value	7.5 kW
— at 230 V at 60 °C rated value	7.5 kW
— at 400 V rated value	13 kW
— at 400 V at 60 °C rated value	13 kW
— at 690 V rated value	22 kW
— at 690 V at 60 °C rated value	22 kW
• at AC-2 at 400 V rated value	4 kW
• at AC-3	
— at 230 V rated value	2.2 kW
— at 400 V rated value	4 kW
— at 500 V rated value	4 kW
— at 690 V rated value	5.5 kW
Operating power for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	2 kW
• at 690 V rated value	2.5 kW
Thermal short-time current limited to 10 s	72 A
Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor	0.7 W
No-load switching frequency	
• at DC	10 000 1/h
Operating frequency	
• at AC-1 maximum	1 000 1/h
• at AC-2 maximum	750 1/h
• at AC-3 maximum	750 1/h
• at AC-4 maximum	250 1/h
Control circuit/ Control	
Type of voltage of the control supply voltage	DC
Control supply voltage at DC	

• rated value	24 V
Operating range factor control supply voltage rated	
value of magnet coil at DC	
● initial value	0.8
Full-scale value	1.1
Design of the surge suppressor	with diode
Closing power of magnet coil at DC	4 W
Holding power of magnet coil at DC	4 W
Closing delay	
• at DC	30 100 ms
Opening delay	
• at DC	7 13 ms
Arcing time	10 15 ms
Control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
Number of NO contacts for auxiliary contacts	
• instantaneous contact	1
Operating current at AC-12 maximum	10 A
Operating current at AC-15	
• at 230 V rated value	10 A
• at 400 V rated value	3 A
• at 500 V rated value	2 A
• at 690 V rated value	1 A
Operating current at DC-12	
• at 24 V rated value	10 A
• at 48 V rated value	6 A
• at 60 V rated value	6 A
• at 110 V rated value	3 A
• at 125 V rated value	2 A
• at 220 V rated value	1 A
• at 600 V rated value	0.15 A
Operating current at DC-13	
• at 24 V rated value	10 A
• at 48 V rated value	2 A
at 60 V rated value	2 A
• at 110 V rated value	1 A

0.9 A

0.3 A

0.1 A

# UL/CSA ratings

• at 125 V rated value

• at 220 V rated value

• at 600 V rated value

Contact reliability of auxiliary contacts

1 faulty switching per 100 million (17 V, 1 mA)

Full-load current (FLA) for three-phase AC motor	
• at 480 V rated value	7.6 A
• at 600 V rated value	9 A
Yielded mechanical performance [hp]	
• for single-phase AC motor	
— at 110/120 V rated value	0.33 hp
— at 230 V rated value	1 hp
• for three-phase AC motor	
— at 200/208 V rated value	2 hp
— at 220/230 V rated value	3 hp
— at 460/480 V rated value	5 hp
— at 575/600 V rated value	7.5 hp
Contact rating of auxiliary contacts according to UL	A600 / Q600

#### Short-circuit protection

Design	of the	fuea	link
Design	OI LITE	IUSE	III IN

• for short-circuit protection of the main circuit

— with type of coordination 1 required

gG: 35A (690V,100kA), aM: 20A (690V,100kA), BS88: 35A

(415V,80kA)

— with type of assignment 2 required

gG: 20A (690V,100kA), aM: 16A (690V, 100kA), BS88: 20A

(415V, 80kA)

• for short-circuit protection of the auxiliary switch required

gG: 10 A (500 V, 1 kA)

Mounting position	+/-180° rotation possible on vertical mounting surface; can be
- 1	tilted forward and backward by +/- 22.5° on vertical mounting
	surface
Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail
	according to DIN EN 60715
<ul> <li>Side-by-side mounting</li> </ul>	Yes
Height	70 mm
Width	45 mm
Depth	73 mm
Required spacing	
<ul><li>with side-by-side mounting</li></ul>	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
• for grounded parts	
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm

— downwards	10 mm
• for live parts	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm

— upwards	10 mm
— downwards	10 mm
— at the side	6 mm
Connections/ Terminals	
Type of electrical connection	
• for main current circuit	spring-loaded terminals
<ul> <li>for auxiliary and control current circuit</li> </ul>	spring-loaded terminals
<ul> <li>at contactor for auxiliary contacts</li> </ul>	Spring-type terminals
• of magnet coil	Spring-type terminals
Type of connectable conductor cross-sections	
• for main contacts	
— solid	2x (0.5 4 mm²)
<ul><li>— single or multi-stranded</li></ul>	2x (0,5 4 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 2.5 mm²)
<ul> <li>finely stranded without core end processing</li> </ul>	2x (0.5 2.5 mm²)
<ul> <li>at AWG conductors for main contacts</li> </ul>	2x (20 12)
Connectable conductor cross-section for main	
contacts	0.5 42
• solid	0.5 4 mm <sup>2</sup>
• stranded	0.5 4 mm²
finely stranded with core end processing	0.5 2.5 mm <sup>2</sup>
finely stranded without core end processing	0.5 2.5 mm²
Connectable conductor cross-section for auxiliary contacts	
<ul><li>single or multi-stranded</li></ul>	0.5 4 mm²
<ul> <li>finely stranded with core end processing</li> </ul>	0.5 2.5 mm²
<ul> <li>finely stranded without core end processing</li> </ul>	0.5 2.5 mm²
Type of connectable conductor cross-sections	
• for auxiliary contacts	
<ul><li>— single or multi-stranded</li></ul>	2x (0,5 4 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 2.5 mm²)
<ul> <li>finely stranded without core end processing</li> </ul>	2x (0.5 2.5 mm²)
<ul> <li>at AWG conductors for auxiliary contacts</li> </ul>	2x (20 12)
AWG number as coded connectable conductor cross	
section	00 40
• for main contacts	20 12

• for auxiliary contacts

20 ... 12

Safety related data	
B10 value	
<ul> <li>with high demand rate acc. to SN 31920</li> </ul>	1 000 000
Proportion of dangerous failures	
<ul> <li>with low demand rate acc. to SN 31920</li> </ul>	40 %
<ul> <li>with high demand rate acc. to SN 31920</li> </ul>	73 %
Failure rate [FIT]	
<ul> <li>with low demand rate acc. to SN 31920</li> </ul>	100 FIT
Product function	
<ul> <li>Mirror contact acc. to IEC 60947-4-1</li> </ul>	Yes; with 3RH29
T1 value for proof test interval or service life acc. to	20 y
IEC 61508	
Protection against electrical shock	finger-safe

# Certificates/ approvals

### General Product Approval

**EMC** 











Functional Safety/Safety of Machinery	Declaration of Conformity	Test Certificates	Marine / Ship- ping
Type Examination  Certificate	Miscellaneous  EG-Konf.	Type Test Certificates/Test Report Special Test Certificates  Special Test Certificates	ABS

# Marine / Shipping









KC





### other

Confirmation



# Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

www.siemens.com/sirius/catalogs

#### Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2016-2FB41

#### Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2016-2FB41

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2016-2FB41


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT2016-2FB41&lang=en


#### Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2016-2FB41/char


### Further characteristics (e.g. electrical endurance, switching frequency)


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2016-2FB41&objecttype=14&gridview=view1







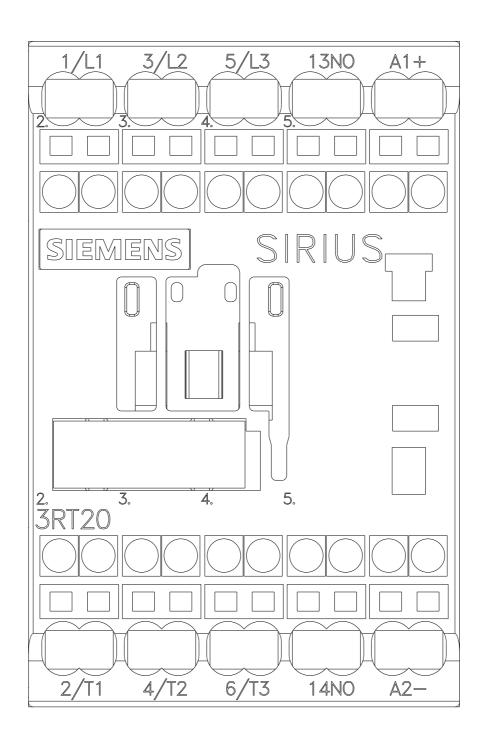

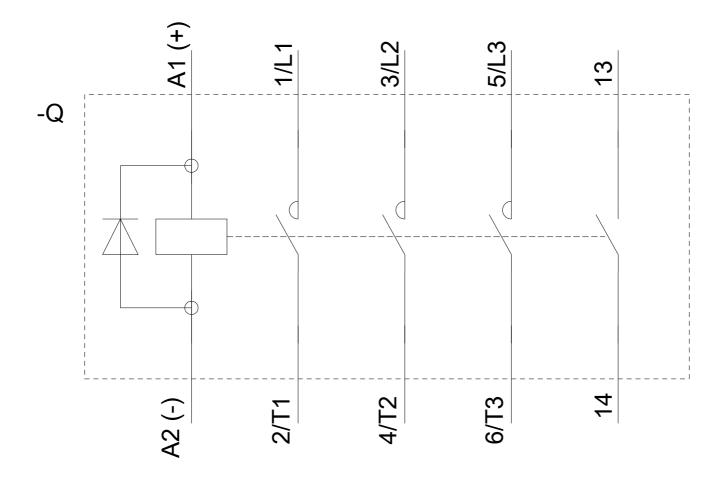

**last modified:** 08/20/2019