SIEMENS

Data sheet 3RT2017-1AK62

Power contactor, AC-3 12 A, 5.5~kW / 400~V 1 NC, 110~V AC, 50~Hz, 120~V 60 Hz, 3-pole, Size S00 screw terminal



Product brand name	SIRIUS
Product designation	Power contactor
Product type designation	3RT2

General technical data	
Size of contactor	S00
Product extension	
 function module for communication 	No
Auxiliary switch	Yes
Surge voltage resistance	
 of main circuit rated value 	6 kV
 of auxiliary circuit rated value 	6 kV
maximum permissible voltage for safe isolation	
 between coil and main contacts acc. to EN 	400 V
60947-1	
Protection class IP	
• on the front	IP20
• of the terminal	IP20
Shock resistance at rectangular impulse	
• at AC	7,3g / 5 ms, 4,7g / 10 ms

Chook registance with sine mules	
Shock resistance with sine pulse	11,4g / 5 ms, 7,3g / 10 ms
at AC Mechanical service life (switching cycles)	11, Tg / 0 1115, 7,0g / 10 1115
	30 000 000
of contactor typical of the contactor with added alegativesia.	5 000 000
 of the contactor with added electronics- compatible auxiliary switch block typical 	5 000 000
 of the contactor with added auxiliary switch block typical 	10 000 000
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	К
Reference code acc. to DIN EN 81346-2	Q
Ambient conditions	
Installation altitude at height above sea level	
• maximum	2 000 m
Ambient temperature	
during operation	-25 +60 °C
• during storage	-55 +80 °C
Main circuit	
Number of poles for main current circuit	3
Number of NO contacts for main contacts	3
Operating voltage	
at AC-3 rated value maximum	690 V
Operating current	
• at AC-1 at 400 V	
 — at ambient temperature 40 °C rated value 	22 A
● at AC-1	
 up to 690 V at ambient temperature 40 °C rated value 	22 A
 up to 690 V at ambient temperature 60 °C rated value 	20 A
• at AC-2 at 400 V rated value	12 A
• at AC-3	
— at 400 V rated value	12 A
— at 500 V rated value	9.2 A
— at 690 V rated value	6.7 A
• at AC-4 at 400 V rated value	8.5 A
• at AC-5a up to 690 V rated value	19.4 A
• at AC-5b up to 400 V rated value	9.9 A
● at AC-6a	
 up to 230 V for current peak value n=20 rated value 	7.2 A

 up to 400 V for current peak value n=20 rated value 	7.2 A
 up to 500 V for current peak value n=20 rated value 	7.2 A
 up to 690 V for current peak value n=20 rated value 	6.7 A
● at AC-6a	
— up to 230 V for current peak value n=30	4.8 A
rated value	
 up to 400 V for current peak value n=30 rated value 	4.8 A
— up to 500 V for current peak value n=30	4.8 A
rated value	
— up to 690 V for current peak value n=30	4.8 A
rated value	
Minimum cross-section in main circuit	
at maximum AC-1 rated value	4 mm²
Operating current for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	4.1 A
• at 690 V rated value	3.3 A
Operating current	
• at 1 current path at DC-1	
— at 24 V rated value	20 A
— at 110 V rated value	2.1 A
— at 220 V rated value	0.8 A
— at 440 V rated value	0.6 A
— at 600 V rated value	0.6 A
 with 2 current paths in series at DC-1 	
— at 24 V rated value	20 A
— at 110 V rated value	12 A
— at 220 V rated value	1.6 A
— at 440 V rated value	0.8 A
— at 600 V rated value	0.7 A
 with 3 current paths in series at DC-1 	
— at 24 V rated value	20 A
— at 110 V rated value	20 A
— at 220 V rated value	20 A
— at 440 V rated value	1.3 A
— at 600 V rated value	1 A
Operating current	
• at 1 current path at DC-3 at DC-5	
— at 24 V rated value	20 A

— at 110 V rated value	0.1 A
 with 2 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	20 A
— at 110 V rated value	0.35 A
 with 3 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	20 A
— at 110 V rated value	20 A
— at 220 V rated value	1.5 A
— at 440 V rated value	0.2 A
— at 600 V rated value	0.2 A
Operating power	
• at AC-1	
— at 230 V rated value	7.5 kW
— at 230 V at 60 °C rated value	7.5 kW
— at 400 V rated value	13 kW
— at 400 V at 60 °C rated value	13 kW
— at 690 V rated value	22 kW
— at 690 V at 60 °C rated value	22 kW
• at AC-2 at 400 V rated value	5.5 kW
• at AC-3	
— at 230 V rated value	3 kW
— at 400 V rated value	5.5 kW
— at 500 V rated value	5.5 kW
— at 690 V rated value	5.5 kW
Operating power for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	2 kW
• at 690 V rated value	2.5 kW
Thermal short-time current limited to 10 s	90 A
Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor	1.2 W
No-load switching frequency	
• at AC	10 000 1/h
Operating frequency	
• at AC-1 maximum	1 000 1/h
• at AC-2 maximum	750 1/h
• at AC-3 maximum	750 1/h
• at AC-4 maximum	250 1/h
Control circuit/ Control	
Type of voltage of the control supply voltage	AC
Control supply voltage at AC	

• at 50 Hz rated value	110 V
• at 60 Hz rated value	120 V
Operating range factor control supply voltage rated	
value of magnet coil at AC	
● at 50 Hz	0.8 1.1
● at 60 Hz	0.8 1.1
Apparent pick-up power of magnet coil at AC	
● at 50 Hz	36 V·A
● at 60 Hz	36 V·A
Inductive power factor with closing power of the coil	
● at 50 Hz	0.8
● at 60 Hz	0.8
Apparent holding power of magnet coil at AC	
● at 50 Hz	5.9 V·A
● at 60 Hz	5.9 V·A
Inductive power factor with the holding power of the	
coil	204
• at 50 Hz	0.24
• at 60 Hz	0.24
Closing delay	0
• at AC	8 33 ms
Opening delay	A 45 mg
• at AC	4 15 ms
• at AC Arcing time	10 15 ms
• at AC	
at AC Arcing time Control version of the switch operating mechanism Auxiliary circuit	10 15 ms
at AC Arcing time Control version of the switch operating mechanism	10 15 ms Standard A1 - A2
at AC Arcing time Control version of the switch operating mechanism Auxiliary circuit Number of NC contacts for auxiliary contacts	10 15 ms Standard A1 - A2
at AC Arcing time Control version of the switch operating mechanism Auxiliary circuit Number of NC contacts for auxiliary contacts	10 15 ms Standard A1 - A2
at AC Arcing time Control version of the switch operating mechanism Auxiliary circuit Number of NC contacts for auxiliary contacts • instantaneous contact Operating current at AC-12 maximum Operating current at AC-15	10 15 ms Standard A1 - A2 1 10 A
at AC Arcing time Control version of the switch operating mechanism Auxiliary circuit Number of NC contacts for auxiliary contacts	10 15 ms Standard A1 - A2 1 10 A 10 A
at AC Arcing time Control version of the switch operating mechanism Auxiliary circuit Number of NC contacts for auxiliary contacts • instantaneous contact Operating current at AC-12 maximum Operating current at AC-15	10 15 ms Standard A1 - A2 1 10 A 10 A 3 A
at AC Arcing time Control version of the switch operating mechanism Auxiliary circuit Number of NC contacts for auxiliary contacts instantaneous contact Operating current at AC-12 maximum Operating current at AC-15 at 230 V rated value	10 15 ms Standard A1 - A2 1 10 A 10 A 3 A 2 A
at AC Arcing time Control version of the switch operating mechanism Auxiliary circuit Number of NC contacts for auxiliary contacts	10 15 ms Standard A1 - A2 1 10 A 10 A 3 A
at AC Arcing time Control version of the switch operating mechanism Auxiliary circuit Number of NC contacts for auxiliary contacts • instantaneous contact Operating current at AC-12 maximum Operating current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value	10 15 ms Standard A1 - A2 1 10 A 10 A 3 A 2 A
at AC Arcing time Control version of the switch operating mechanism Auxiliary circuit Number of NC contacts for auxiliary contacts instantaneous contact Operating current at AC-12 maximum Operating current at AC-15 at 230 V rated value at 400 V rated value at 500 V rated value at 690 V rated value	10 15 ms Standard A1 - A2 1 10 A 10 A 3 A 2 A
at AC Arcing time Control version of the switch operating mechanism Auxiliary circuit Number of NC contacts for auxiliary contacts • instantaneous contact Operating current at AC-12 maximum Operating current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value	10 15 ms Standard A1 - A2 1 10 A 10 A 3 A 2 A 1 A
at AC Arcing time Control version of the switch operating mechanism Auxiliary circuit Number of NC contacts for auxiliary contacts • instantaneous contact Operating current at AC-12 maximum Operating current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • at 24 V rated value	10 15 ms Standard A1 - A2 1 10 A 10 A 3 A 2 A 1 A
at AC Arcing time Control version of the switch operating mechanism Auxiliary circuit Number of NC contacts for auxiliary contacts • instantaneous contact Operating current at AC-12 maximum Operating current at AC-15 • at 230 V rated value • at 400 V rated value • at 690 V rated value Operating current at DC-12 • at 24 V rated value • at 48 V rated value	10 15 ms Standard A1 - A2 1 10 A 10 A 3 A 2 A 1 A 10 A 6 A
at AC Arcing time Control version of the switch operating mechanism Auxiliary circuit Number of NC contacts for auxiliary contacts • instantaneous contact Operating current at AC-12 maximum Operating current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 60 V rated value	10 15 ms Standard A1 - A2 1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A
at AC Arcing time Control version of the switch operating mechanism Auxiliary circuit Number of NC contacts for auxiliary contacts • instantaneous contact Operating current at AC-12 maximum Operating current at AC-15 • at 230 V rated value • at 400 V rated value • at 690 V rated value • at 690 V rated value • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value	10 15 ms Standard A1 - A2 1 10 A 10 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A

Contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
• at 600 V rated value	0.1 A
• at 220 V rated value	0.3 A
• at 125 V rated value	0.9 A
• at 110 V rated value	1 A
• at 60 V rated value	2 A
• at 48 V rated value	2 A
• at 24 V rated value	10 A
Operating current at DC-13	

UL/CSA ratings	
Full-load current (FLA) for three-phase AC motor	
• at 480 V rated value	11 A
• at 600 V rated value	11 A
Yielded mechanical performance [hp]	
 for single-phase AC motor 	
— at 110/120 V rated value	0.5 hp
— at 230 V rated value	2 hp
 for three-phase AC motor 	
— at 200/208 V rated value	3 hp
— at 220/230 V rated value	3 hp
— at 460/480 V rated value	7.5 hp
— at 575/600 V rated value	10 hp
Contact rating of auxiliary contacts according to UL	A600 / Q600

Short-circuit	protection
Design of the	e fuse link

 for short-circuit 	protection	of the	main	circuit

— with type of coordination 1 required gG: 50A (690V,100kA), aM: 20A (690V,100kA), BS88: 35A (415V,80kA)

— with type of assignment 2 requiredgG: 20A (690V,100kA), aM: 16A (690V, 100kA), BS88: 20A(415V, 80kA)

• for short-circuit protection of the auxiliary switch required

gG: 10 A (500 V, 1 kA)

Installation/ mounting/ dimensions	
Mounting position	+/-180° rotation possible on vertical mounting surface; can be
	tilted forward and backward by +/- 22.5° on vertical mounting surface
Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715
 Side-by-side mounting 	Yes
Height	58 mm
Width	45 mm
Depth	73 mm

Required spacing	
with side-by-side mounting	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	0 mm
• for grounded parts	
— forwards	10 mm
— upwards	10 mm
— at the side	6 mm
— downwards	10 mm
● for live parts	
— forwards	10 mm
— upwards	10 mm
— downwards	10 mm
— at the side	6 mm

Connections/ Terminals		
Type of electrical connection		
• for main current circuit	screw-type terminals	
 for auxiliary and control current circuit 	screw-type terminals	
 at contactor for auxiliary contacts 	Screw-type terminals	
• of magnet coil	Screw-type terminals	
Type of connectable conductor cross-sections		
• for main contacts		
— solid	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), 2x 4 mm²	
 single or multi-stranded 	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm²	
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)	
 at AWG conductors for main contacts 	2x (20 16), 2x (18 14), 2x 12	
Connectable conductor cross-section for main		
contacts		
• solid	0.5 4 mm²	
• stranded	0.5 4 mm²	
 finely stranded with core end processing 	0.5 2.5 mm²	
Connectable conductor cross-section for auxiliary		
contacts		
 single or multi-stranded 	0.5 4 mm²	
 finely stranded with core end processing 	0.5 2.5 mm²	
Type of connectable conductor cross-sections		
• for auxiliary contacts		
— single or multi-stranded	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm²	
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)	

 at AWG conductors for auxiliary contacts 	2x (20 16), 2x (18 14), 2x 12
AWG number as coded connectable conductor cross	
section	
• for main contacts	20 12
• for auxiliary contacts	20 12

Safety related data	
B10 value	
 with high demand rate acc. to SN 31920 	1 000 000
Proportion of dangerous failures	
 with low demand rate acc. to SN 31920 	40 %
 with high demand rate acc. to SN 31920 	73 %
Failure rate [FIT]	
 with low demand rate acc. to SN 31920 	100 FIT
Product function	
 Mirror contact acc. to IEC 60947-4-1 	Yes
T1 value for proof test interval or service life acc. to	20 y
IEC 61508	
Protection against electrical shock	finger-safe

General Product Approval







KC





EMC

Functional Safety/Safety of Machinery	Declaration of Conformity	Test Certificates	Marine / Ship- ping
Type Examination Certificate	Miscellaneous EG-Konf.	Type Test Certificates/Test Report Special Test Certificate	ABS

Marine / Shipping













other

Confirmation



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

www.siemens.com/sirius/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2017-1AK62

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2017-1AK62

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT2017-1AK62


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2017-1AK62&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT2017-1AK62/char


Further characteristics (e.g. electrical endurance, switching frequency)


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2017-1AK62&objecttype=14&gridview=view1







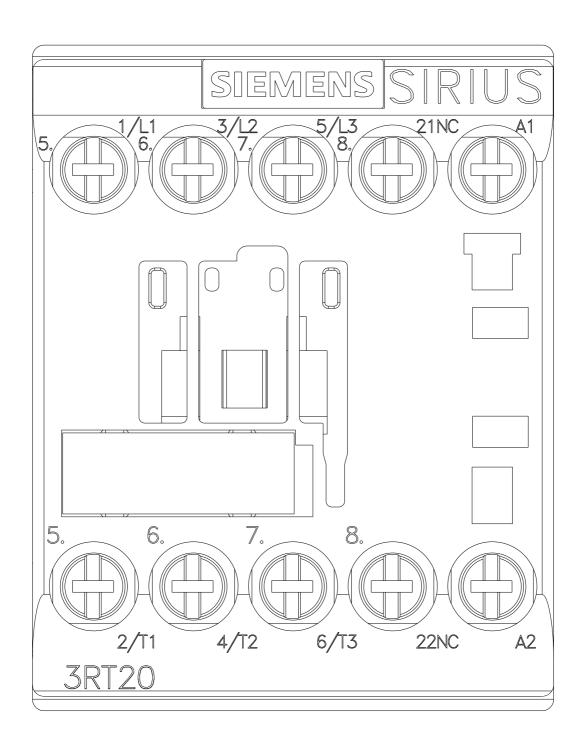

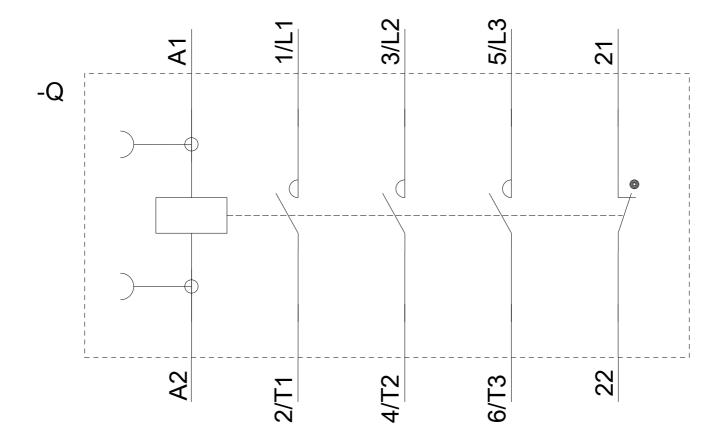

last modified: 08/20/2019