


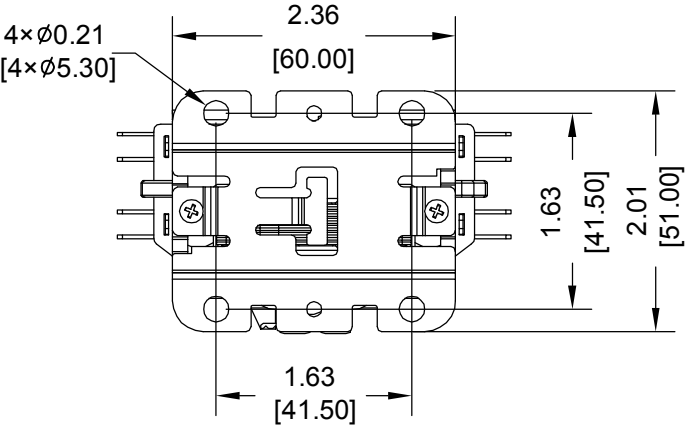


POLES	COIL VAC	FLA	RES	TERMINATION	COVER	INDIVIDUAL BOX	COIL DATA	NOTES: UNLESS OTHERWISE SPECIFIED	
1	120VAC 50/60Hz	30	40	#10-32 COMBINATION SCREWS 4 Quick Connect Power Termination	YES	YES	COIL 120VAC 50/60Hz 467 OHM 90 VAC OPERATE 19.2-81.6 VAC DROPOUT 30.8 VA INRUSH 5.4 VA SEAL MAX VOLTAGE 132 VAC		




STANCOR		DP1T30			
1000152-163	VAC	FLA	LRA	L1	
1P-30A-120V	240/277	30	180		
COIL	480	30	150	L2	
120VAC 50/60Hz	600	30	120		
B W W Y Y	RES	AMPS	40		
Made in China	E246810	Herm.refrig.comp.	HCDPY112030AA		
Torque for CU 75°C: screws 20 in lbs / lugs 40 in lbs					

Product Label

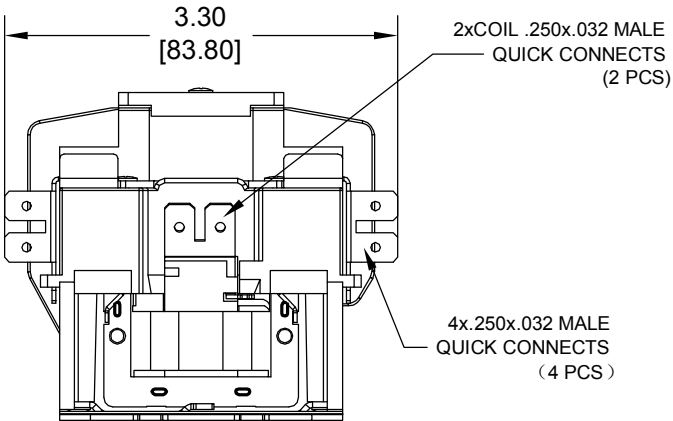

STANCOR		Definite Purpose Contactor	
Enclosure:	OPEN		
Power Poles:	1		
Amp Rating:	FLA 30 RES 40		
Coil Voltage:	120VAC 50/60Hz		
DP1T30	HCDPY112030AA		
1000152-163	B W W Y Y		
1P-30A-120V	Made in China		

Individual Box Label

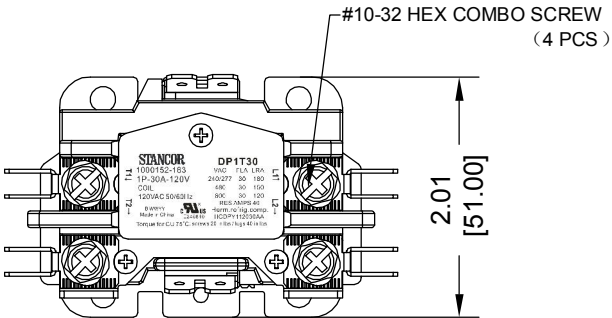

DP1T30	
1000152-163	
1P-30A-120V	
HCDPY112030AA	
QTY.: 50PCS	

Master Carton Label

TOLERANCE	
INCHES [mm]	
X	±0.06 [1.50]
X.X	±0.02 [.50]
X.XX	±0.006 [.150]
X.XXX	±0.002 [.050]
ANGLES	±1°
THIRD ANGLE PROJECTION	

REV	DESCRIPTION	ECN	DWN	APVD	APVD DATE
STANCOR 2425 South 21st Street Phoenix, AZ 85034 www.stancor.com (602)275-3800					
DRAWN BY		DRAWN DATE		CHECKED DATE	
DESC.		1P-30A-120V		PAGE 1 OF 1	
PART NO.		DP1T30			