




COLL DATA	NOTES: UNLESS OTHERWISE SPECIFIED	
COLL 277VAC 50/60Hz		
2448 OHM 208 VAC OPERATE		
44-188 VAC DROP/OUT		
30.8 VA INRUSH 5.4 VA SEAL		
MAX VOLTAGE 304.7 VAC		

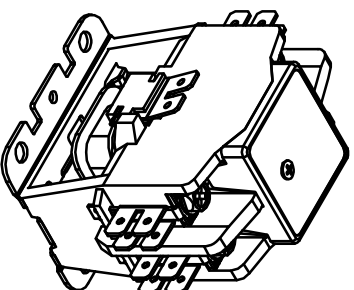


2.05 [52.00]		
2.76 [70.00]	STANCOR Define Purpose Contact	
Enclosure: Power Poles: Amp Rating: Coil Voltage:	OPEN 2 FLA 30 RES 40 277VAC 50/60Hz	
DP2V30 1000170-163 2P-30A-277V HDDP227730A- E1WWY Made in China		

L1 ↑
STANCOR
 10001770-163
 2P-30A-277V
 RES AMPS 40
 COL
 277VAC 30/60Hz
E468810
®
us
 Torque for CU 75°C screws 20 in lb / 1/8 in lb
 Made in China
 B W W Y Y
T1 ↓

↑ L2
DP2V30
 VAC FIA LRA
 240/277 30 150
 480 30 150
 600 30 120
 Heri refrig. comp.
 HCDP1227/30AA

↑ T2

Product Label

TOLERANCE		INCHES (mm)		X		X.X		X.XX		X.XXX		ANGLES	
		±0.06 (1.50)		±0.02 (.50)		±0.006 (.150)		±0.002 (.050)		±1°		THIRD ANGLE PROJECTION	
REV.		DESCRIPTION		ECN		DWN		AP'D		AP'D DATE			
STANCOR		2425 South 21st Street		Phoenix, AZ 85034		www.stancor.com		602/275-3800		DRAWN BY		DRAWN DATE	
DESC.		2P-30A-27TV		CHECKED BY		CHECKED DATE		PART NO.		DP2V30		PAGE 1 OF 1	