
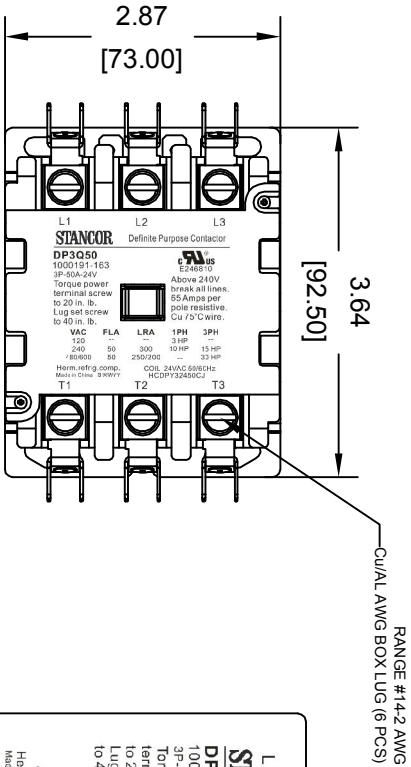
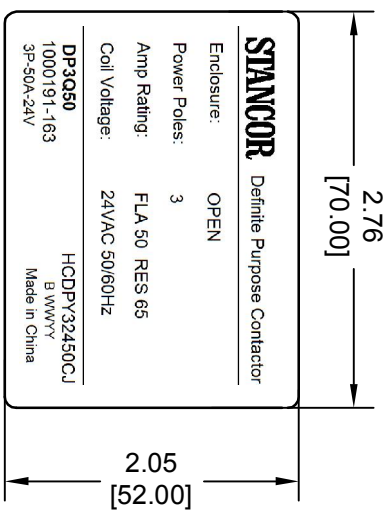
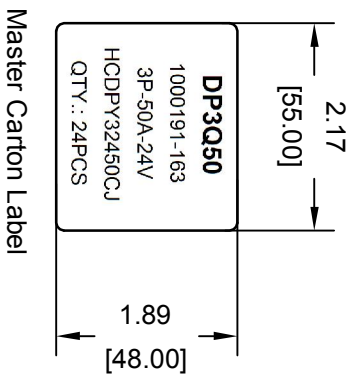
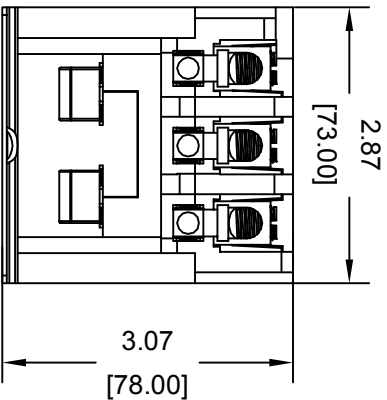
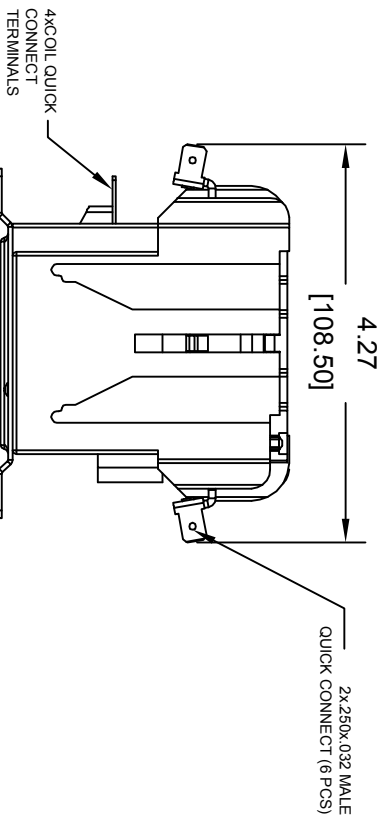
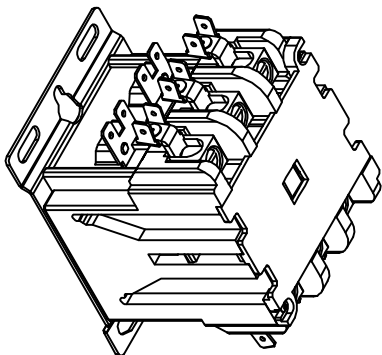


POLES	COIL VAC	FLA	RES	TERMINATION	COVER	INDIVIDUAL BOX
3	24VAC 50/60Hz	50	65	#14-2 C COMPRESSION TERMINALS 2 Quick Connect Power Termination	YES	YES

COIL DATA		NOTES: UNLESS OTHERWISE SPECIFIED
COIL 24VAC 50/60HZ 4.8 OHM 18 VAC OPERATE 3.8-16.3 VAC DROPOUT 120 VA INRUSH 21 VA SEAL MAX VOLTAGE 26.4 VAC		

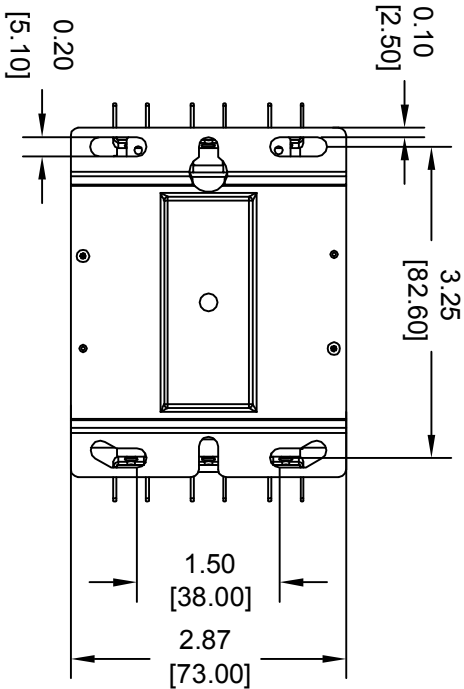

L1	L2	L3
STANCOR Definite Purpose Contactor DP3Q50 1000191-163 3P-50A-24V Torque power terminal screw to 20 in. lb. Lug set screw to 40 in. lb. VAC FLA LRA 1PH 3PH 120 50 300 31HP 15HP 240 50 300 10HP 33HP 480/600 50 250/200 Horn, ref'rig comp. Made in China B W W V V Y Y HCDPY32450CJ	STANCOR Definite Purpose Contactor DP3Q50 1000191-163 3P-50A-24V Torque power terminal screw to 20 in. lb. Lug set screw to 40 in. lb. VAC FLA LRA 1PH 3PH 120 50 300 31HP 15HP 240 50 300 10HP 33HP 480/600 50 250/200 Horn, ref'rig comp. Made in China B W W V V Y Y HCDPY32450CJ	STANCOR Definite Purpose Contactor DP3Q50 1000191-163 3P-50A-24V Torque power terminal screw to 20 in. lb. Lug set screw to 40 in. lb. VAC FLA LRA 1PH 3PH 120 50 300 31HP 15HP 240 50 300 10HP 33HP 480/600 50 250/200 Horn, ref'rig comp. Made in China B W W V V Y Y HCDPY32450CJ

REV	DESCRIPTION	EGN	OWN	APPD	DATE
TOLERANCE					
INCHES (mm)					
X ±0.06 [1.50]					
X.X ±0.02 [1.50]					
X.XX ±0.006 [1.50]					
X.XXX ±0.002 [1.50]					
ANGLES ±1°					
THIRD ANGLE PROJECTION					
DESC. 3P-50A-24V					
PART NO. DP3Q50					
STANCOR 2425 South 21st Street Phoenix, AZ 85034 www.stancor.com (602)275-3800					
DRAWN BY DRAWN DATE CHECKED BY CHECKED DATE					
PAGE 1 OF 1					