

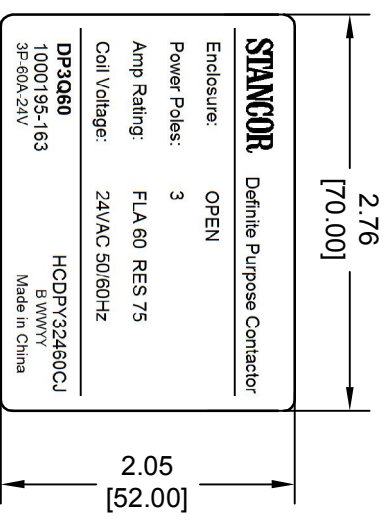
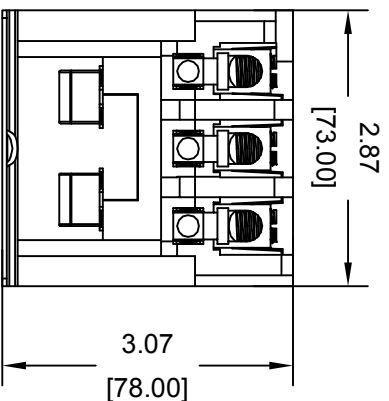
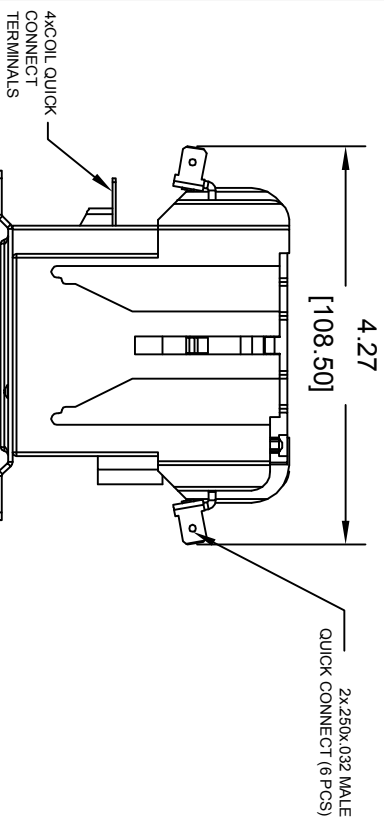
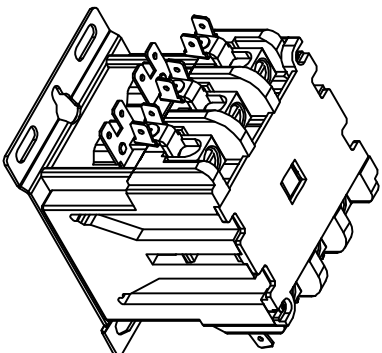
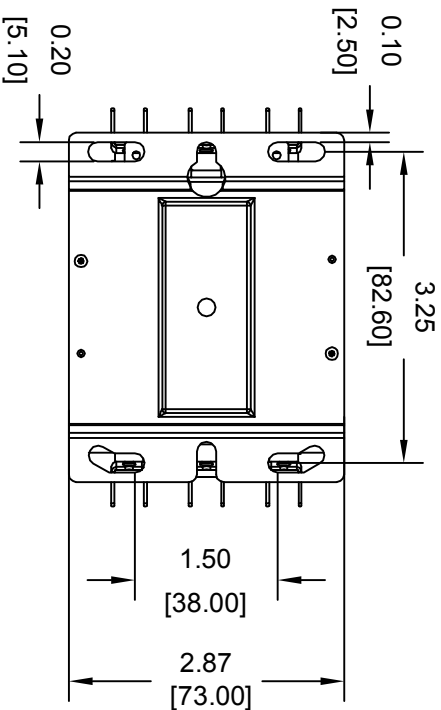



POLES	COIL VAC	FLA	RES	TERMINATION	COVER	INDIVIDUAL BOX
3	24VAC 50/60Hz	60	75	#14-2 COMPRESSION TERMINALS 2 Quick Connect Power Termination	YES	YES

COIL DATA	NOTES: UNLESS OTHERWISE SPECIFIED	
COIL 24VAC 50/60HZ		
4.8 OHM 18 VAC OPERATE		
3.8-16.3 VAC DROPOUT		
120 VA INRUSH 21 VA SEAL MAX VOLTAGE 26.4 VAC		

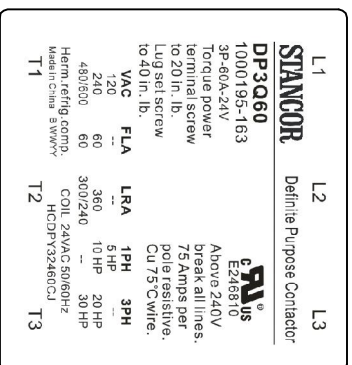

Individual Box Label

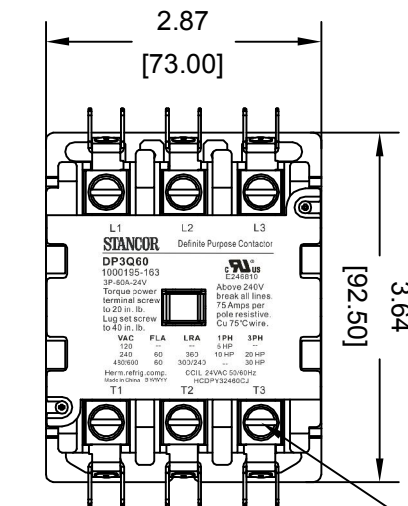

TOLERANCE		INCHES (mm)		X		X.X		X.XX		X.XXX		ANGLES		THIRD ANGLE PROJECTION	
		±0.06 [1.50]		±0.02 [1.50]		±0.006 [1.50]		±0.002 [0.50]		±1°					
REV.		DESCRIPTION		ECN	DMN	APVD	APVD DATE								
STANCOR 2425 South 21st Street Phoenix, AZ 85034 (602)275-3800 www.stancor.com															
DRAWN BY				DRAWN DATE				CHECKED BY				CHECKED DATE			
DESC.				3P-60A-24V				PAGE				1 OF 1			
PART NO.				DP3Q60											