


POLES	COIL VAC	FLA	RES	TERMINATION	COVER	INDIVIDUAL BOX
3	24VAC 50/60Hz	75	90	#14-1 COMPRESSION TERMINALS 2 Quick Connect Power Termination	YES	YES


COIL DATA
COIL 24 VAC 50/60Hz
0.65 OHM 18 VAC OPERATE
3.8-16.3 VAC DROPOUT
886 VA INRUSH 195 VA SEAL
MAX VOLTAGE 28.4 VAC

NOTES: UNLESS OTHERWISE SPECIFIED

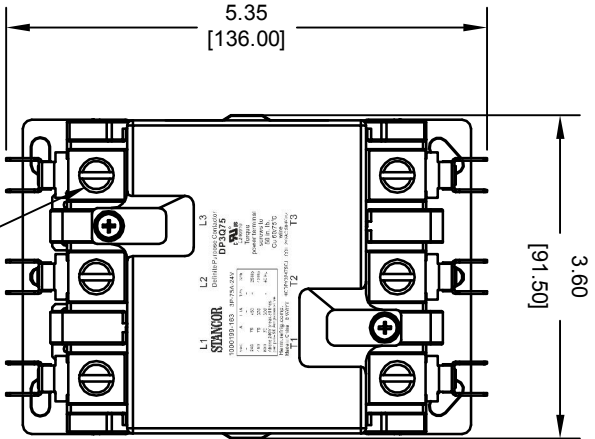


RANGE #14-1 AWG
Cu/AL AWG BOX LUG (6 PCS)

4 COIL QUICK
CONNECT TERMINALS

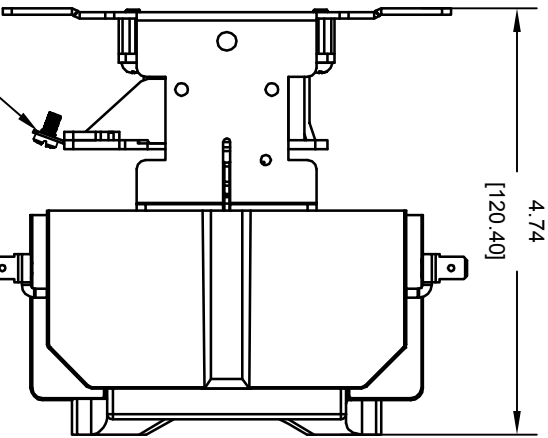

2x.250x.032 MALE
QUICK CONNECT (6 PCS)

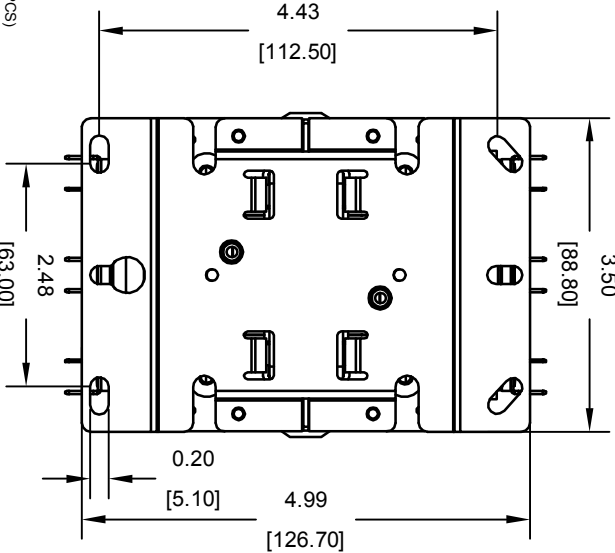

STANCOR
Definite Purpose Contactor

Enclosure: OPEN
Power Poles: 3
Amp Rating: FLA 75 RES 90
Coil Voltage: 24VAC 50/60Hz

DP3Q75
1000199-163
3P-75A-24V
HCDPY32475CJ
B W W Y Y
Made in China

Individual Box Label

TOLERANCE

INCHES (mm)
X ±.06 [1.50]
X.X ±0.02 [50]
X.XX ±0.006 [150]
X.XXX ±0.002 [100]
ANGLES ±1°

Master Carton Label

DP3Q75
1000199-163
3P-75A-24V
HCDPY32475CJ
QTY: 12PCS
2.17 [55.00]
1.89 [48.00]

STANCOR 2425 South 21st Street
Phoenix, AZ 85034
www.stancor.com (602)275-3800

DESC. 3P-75A-24V

DRAWN BY DRAWN DATE CHECKED BY CHECKED DATE

PART NO.

DP3Q75

Product Label

L1

STANCOR

1000199-163 3P-75A-24V

L2

Definite Purpose Contactor

DP3Q75

L3

FLA 75 RES 90

24VAC 50/60Hz

0.65 OHM 18 VAC OPERATE

3.8-16.3 VAC DROPOUT

886 VA INRUSH 195 VA SEAL

MAX VOLTAGE 28.4 VAC

VAC FLA LRA Ph 3Ph

240 75 450 - 25 hp

480 75 375 - 40 hp

600 75 300 - 40 hp

0.0045/240V max 3000

per pole 80 Amper resistive

Therm. rating comp.

Made in China B W W Y Y HCDPY32475CJ COIL 24VAC 50/60Hz

T1 T2 T3

Power terminal screws to 50 in. lb.

Cu 60/75°C wire

Torque E240510

