
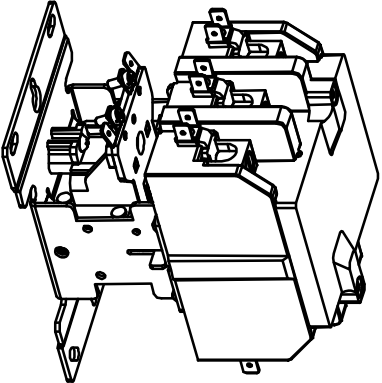
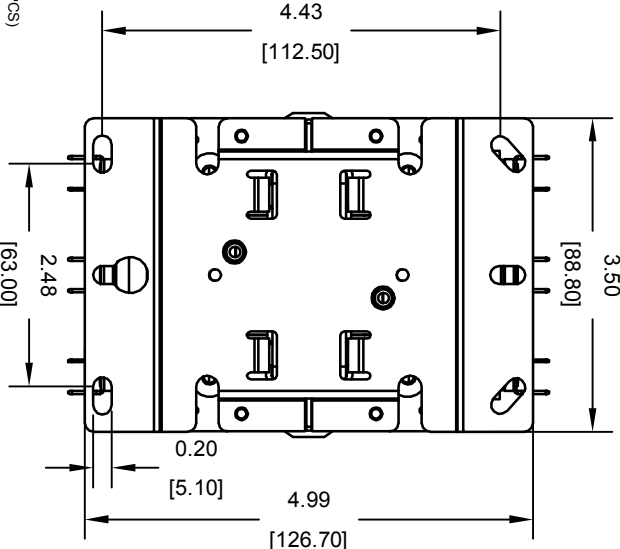
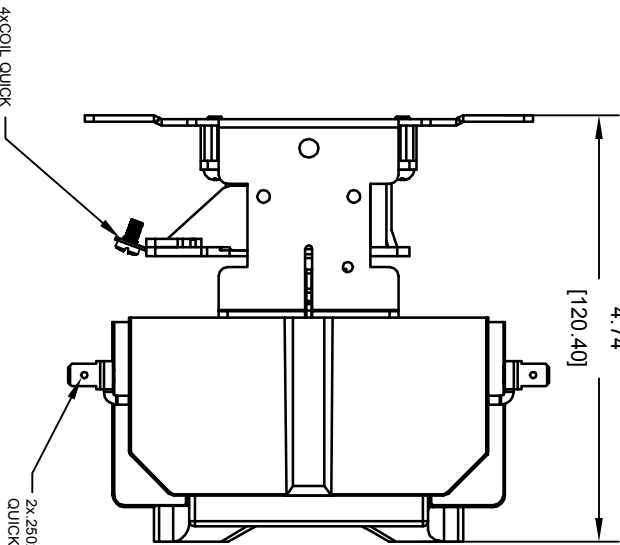


POLES	COIL VAC	FLA	RES	TERMINATION	COVER	INDIVIDUAL BOX
3	24VAC 50/60Hz	90	120	#14-1 COMPRESSION TERMINALS 2 Quick Connect Power Termination	YES	YES

COIL DATA
COIL 24 VAC 50/60Hz 0.65 OHM 18 VAC OPERATE 3.8-16.3 VAC DROPOUT 886 VA INRUSH 195 VA SEAL MAX VOLTAGE 28.4 VAC

NOTES: UNLESS OTHERWISE SPECIFIED

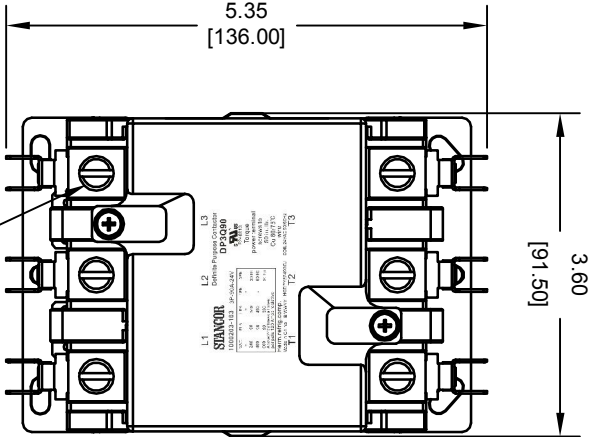

L1	L2	L3
STANCOR Definite Purpose Contactor DP3Q90		
1000203-163 3P-90A-24V		
VAC	FLA	LRA
240	90	540
480	90	450
600	90	380
Herm. refig comp. per pole 120amps resistive		
Torque power terminal screws to 50 in. lb. Cu 60/75C wire		
Herm. refig comp. HCDPY32490CJ COIL 24VAC 50/60Hz		
Made in China B W W Y Y		
T1	T2	T3

Product Label

STANCOR	Definite Purpose Contactor
Enclosure:	OPEN
Power Poles:	3
Amp Rating:	FLA 90 RES 120
Coil Voltage:	24VAC 50/60Hz
DP3Q90	HCDPY32490CJ
1000203-163	B W W Y Y
3P-90A-24V	Made in China

2.17 [55.00]	1.89 [48.00]
DP3Q90	
1000203-163	
3P-90A-24V	
HCDPY32490CJ	
QTY: 12PCS	

Individual Box Label

REV	DESCRIPTION	EGN	OWN	APVD	DATE

Master Carton Label

TOLERANCE
INCHES (mm)
X ±0.06 [1.50]
X.X ±0.02 [1.50]
X.XX ±0.006 [1.50]
X.XXX ±0.002 [1.50]
ANGLES ±1°

THIRD ANGLE PROJECTION	DESC. 3P-90A-24V	PAGE 1 OF 1
DRAWN BY	CHECKED BY	CHECKED DATE
STANCOR 2425 South 21st Street Phoenix, AZ 85034 www.stancor.com (602)275-3800		
PART NO. DP3Q90		