
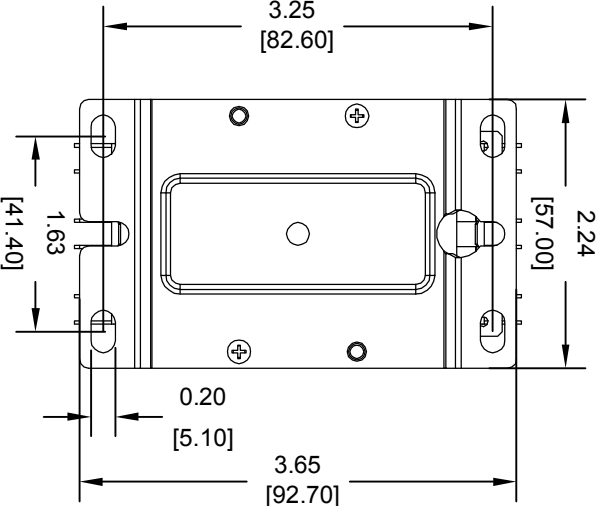
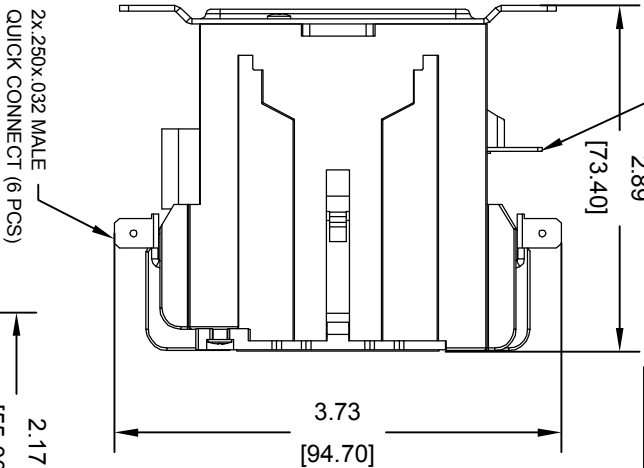


POLES	COIL VAC	FLA	RES	TERMINATION	COVER	INDIVIDUAL BOX
3	120VAC 50/60Hz	30	40	#10-32 Binding Head Screws 2 Quick Connect Power Termination	YES	YES

COIL DATA
COIL 120VAC 50/60Hz 120 OHM 90 VAC OPERATE 19.2-8.16 VAC DROPOUT 120 VA INRUSH 21 VA SEAL MAX VOLTAGE 132 VAC

NOTES: UNLESS OTHERWISE SPECIFIED

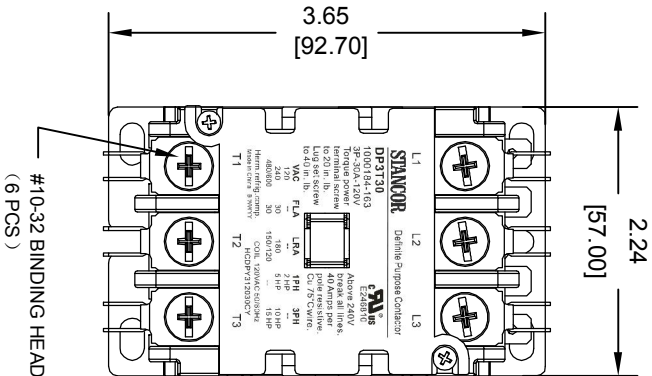

2.76 [70.00]	2.05 [52.00]
STANCOR Definite Purpose Contactor	
Enclosure:	OPEN
Power Poles:	3
Amp Rating:	FLA 30 RES 40
Coil Voltage:	120VAC 50/60Hz
DP3T30 1000184-163 HCDPY312030CY B WVVVY Made in China	

Individual Box Label

2.17 [55.00]	1.89 [48.00]
DP3T30 1000184-163 3P-30A-120V HCDPY312030CY QTY.: 25PCS	

Master Carton Label

L1	L2	L3
STANCOR Definite Purpose Contactor		
DP3T30 1000184-163 3P-30A-120V torque power break all lines. to 20 in. lb. Lug set screw to 40 in. lb.		
VAC	FLA	1PH 3PH
120	--	2HP 10HP
480/200	30	150/120
HCDPY312030CY Made in China B WVVVY		
T1	T2	T3

Product Label

REV.	DESCRIPTION	ESN	OWN	APVD	APVD DATE
STANCOR 2425 South 21st Street Phoenix, AZ 85034 www.stancor.com (602)275-3800					
DRAWN BY		DRAWN DATE		CHECKED DATE	
DESC. 3P-30A-120V				PAGE 1 OF 1	
PART NO. DP3T30					