IEC Appliance Outlet F Shuttered, Screw-on Mounting, Front Side, Solder or Quick-connect Terminal



4721



See below:

Approvals and Compliances

Description Weblinks

- Panel mount Screw-on mounting from front side
- Connector shuttered , Protection class I , Pin temperature 70 °C
- Solder terminals or quick connect terminals

pdf data sheet, html datasheet, General Product Information, Distributor-Stock-Check, Accessories, Detailed request for product

Technical Data					
Ratings IEC	10A / 250VAC; 50Hz	appliance inlet/-outlet	F acc. to IEC 60320-3		
Ratings UL/CSA	15 A / 250 VAC; 60 Hz		UL 60320-1, CSA C22.2 no. 60320-1		
Dielectric Strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50 Hz)		(for cold conditions) pin-temperature 70 °C, 10A, Protection Class I		
Allowable Operation Temperature	-25 °C to 70 °C				
IP-Protection	from front side IP30 acc. to IEC 60529				
Protection against electric shock	Suitable for appliances with protection class I acc. to IEC 61140				
Terminal	Solder terminals or quick connect terminals				
Panel Thickness S	Screw: max 8 mm Mounting screw torque max 0.5 Nm				
Material: Housing	Thermoplastic, black, UL 94V-0				

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: 4721

VDE Approvals VDE VDE Certificate Number: 40030185 UL Approvals UL UL File Number: E103791	Approval Logo	Certificates	Certification Body	Description
UL Approvals UL UL File Number: E103791	₽ E	VDE Approvals	VDE	VDE Certificate Number: 40030185
c 712 us	c FL °us	UL Approvals	UL	UL File Number: E103791
CCC Approvals CCC Ccc Certificate Number: 2012010204576598	(1)	CCC Approvals	CCC	CCC Certificate Number: 2012010204576598

Product standards

Product standards that are referenced

Organization	Design	Standard	Description
<u>IEC</u>	Designed according to	IEC 60320-1	Appliance couplers for household and similar general purposes
<u>IEC</u>	Designed according to	IEC 60320-3	Appliance couplers for household and similar general purposes
(UL)	Designed according to	UL 60320-1	Standard for Attachment Plugs and Receptacles
CSA Group	Designed according to	CSA C22.2 no. 60320-1	General Use Receptacles, Attachment Plugs, and Similar Wiring Devices

Application standards

Application standards where the product can be used

Organization	Design	Standard	Description
<u>IEC</u>	Designed for applications acc.	IEC/UL 60950	IEC 60950-1 includes the basic requirements for the safety of information technology equipment. $ \\$


Compliances


The product complies with following Guide Lines

Identification	Details	Initiator	Description
C€	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
ROHS	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
©	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.


Dimensions [mm]

4721

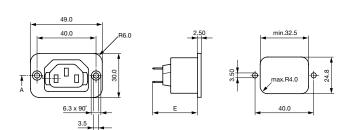



Shutter operation: shutters opened by plug insertion



Shutter operation: shutters closed when plug is removed

E: Solder terminals: 28.4 mm

E: Quick connect terminals $4.8 \times 0.8 \text{ mm}$: 31.1 mm E: Quick connect terminalse $6.3 \times 0.8 \text{ mm}$: 33.2 mm

All Variants

Туре	Panel mounting	Panel Thickness s [mm]	Terminal	Order Number
4721	Screw	-	Quick connect terminals 4.8 x 0.8 mm	4721.0100
4721	Screw	-	Quick connect terminals 6.3 x 0.8 mm	4721.0000
4721	Screw	-	Solder terminals	4721.0300

Most Popular.

 $Availability for all products can be searched real-time: \\ https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER \\ in the first of the control of t$

Class II product also available on request



Panel Thickness Order Number Panel mounting Terminal s [mm]

Cord retaining clamps and insulation covers see accessories

Packaging unit

100 Pcs

Accessories

Description



Assorted Covers Rear Cover

0859.0047



Cord retaining kits Cord retaining strain relief

Countersunk, D	4700.0004
Countersunk, F	4700.0006

Mating Inlets/Plugs

Category / Description

Plug Overview complete



4732, Mounting: Power Cord, Plug: IEC Ellen Bronsvoort, Cable	4732
4735, Mounting: Power Cord, Plug: IEC Ellen Bronsvoort, Cable	4735
9009, Mounting: Plug: IEC Ellen Bronsvoort, Screw clamps	9009
4733, Mounting: Power Cord, Plug: IEC Ellen Bronsvoort, Cable	4733
4736, Mounting: Power Cord, Plug: IEC Ellen Bronsvoort, Cable	4736
Plug further types to 4721	