


IEC Appliance Outlet J, Snap-in Mounting, Front Side, Quick-connect Terminal



Snap-In Version



Description

- Panel Mount
- Snap-in version from front side
- 1 Function
- Connector, Pin temperature 70 °C, Protection class I,
- Quick connect terminals

Approvals

- VDE Certificate Number: 40012242
- UL File Number: E57445
- CSA File Number: 1314981

References

We recommend for new applications the type [4797](#)

Weblinks


[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Accessories](#), [Detailed request for product](#)

Technical Data

Ratings IEC	16 A / 250 VAC; 50 Hz
Ratings UL/CSA	20 A / 250 VAC; 60 Hz
Dielectric Strength	> 2.5 kVAC between L-N > 3 kVAC between L/N-PE (1 min/50 Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 40 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Quick connect terminals
Panel Thickness s	Snap-in version: 1.5/2.5 mm
Material: Housing	PA6, black / grey / white, UL 94V-0

Appliance Outlet	J acc. to IEC 60320-1 UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 16 A, Protection Class I
------------------	---

Dimensions

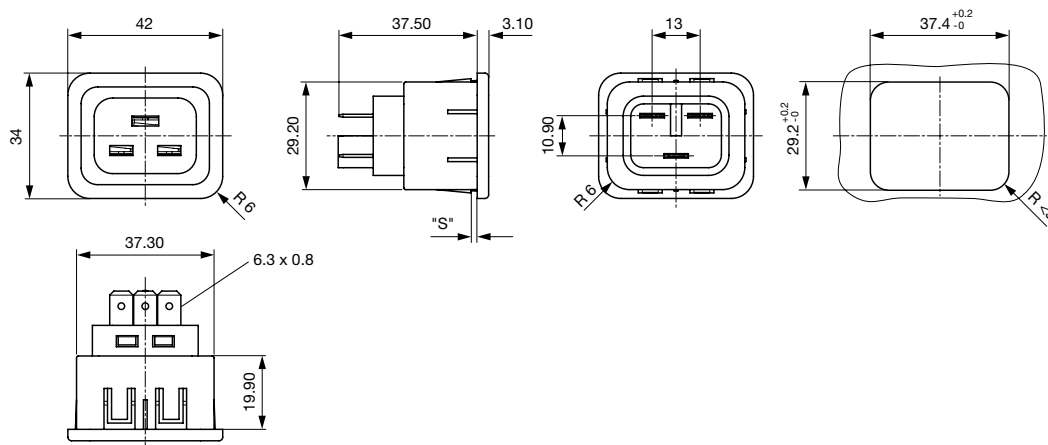

Length of the terminal please find at the order code configuration table

Dimension "S" please ref. to table order code

Config. Code

5213 - H - A B C 0 - D - E G

The characters are placeholders for the correspondingly keys of selections from the key tables.

5213 - H - A B C 0 - D - E G = Type

Type	Configuration key
protection class I	X

5213 - H - A B C 0 - D - E G = Terminals

Terminal L	Configuration key
Blade terminal (6.3 x 0.8 mm) 	9

5213 - H - A B C 0 - D - E G = Terminals

Terminal N	Configuration key
Blade terminal (6.3 x 0.8 mm)	9

Symbols similar as in table A

5213 - H - A B C 0 - D - E G = Terminals

Terminal Ground	Configuration key
Blade terminal (6.3 x 0.8 mm)	9

Symbols similar as in table A

5213 - H - A B C 0 - D - E G = Color

Color	Configuration key
Black	A
Grey	B
White	D

5213 - H - A B C 0 - D - E G = Style

Style	Configuration key
snap-in (s=panel thickness)	4

5213 - H - A B C 0 - D - E G = Mass S

Mass "s"	Configuration key
15	
25	

The dimension "S" is displayed in (1/10 mm). This information is also valid for the order code

All Variants

Terminals L / N	Terminal Ground	Color	Panel Thickness s [1/10 mm]	Config. Code	Order Number
Blade terminal (6.3 x 0.8 mm)	Blade terminal (6.3 x 0.8 mm)	Black	15	5213-X-9990-A-415	6183.0001
Blade terminal (6.3 x 0.8 mm)	Blade terminal (6.3 x 0.8 mm)	White	15	5213-X-9990-D-415	6183.0011

The listed variants should be available from stock. Other versions on request www.schurter.com/contact

Most Popular:

Availability for all products can be searched real-time: <http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER>

Packaging unit 50 Pcs

Mating Inlets/Plugs

Category / Description



[Plug Overview complete](#)

IEC Plug I, Cord Connector (Rewireable), Straight	4796
IEC Plug I, Cord Connector (Rewireable), Angled	4789
IEC Plug I, Cord Connector (Rewireable), Straight	0922

[Plug further types to 5213](#)