

MINIATURE ENCAPSULATED INDUCTOR DESIGNED TO OPERATE AT 300Hz, DC4mA
WITH AN INDUCTANCE OF 0.3H MINIMUM



A. Electrical Specifications (@ 20°C)

1. Inductance; 0.3H MIN @ 300Hz 3VAC DC 4mA
2. DC Current; 4mA MAX
3. Q; 3.0 MIN @ 1KHz, 1VAC DC0mA
4. DC Resistance; $40\Omega \pm 20\%$
5. HiPot; 500VAC 1 minute winding to case




B. Marking; MEI-04, TAMURA, inductance, PM41-M
MICROTRAN, TF5S20ZZ, Date Code and Country of Origin

C. Schematic Diagram

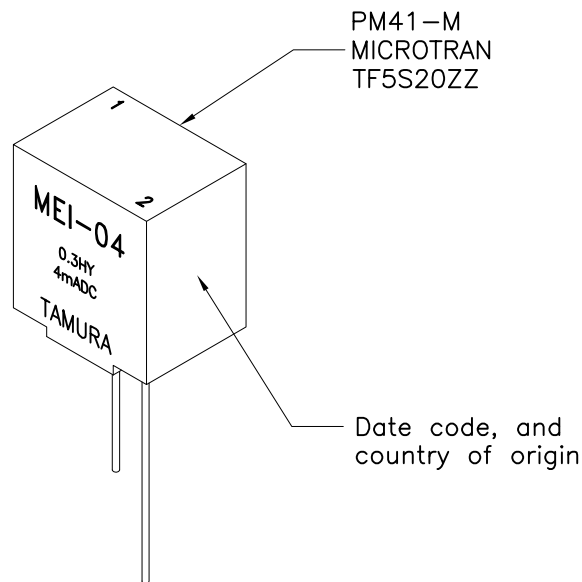

D. Mechanical Specifications

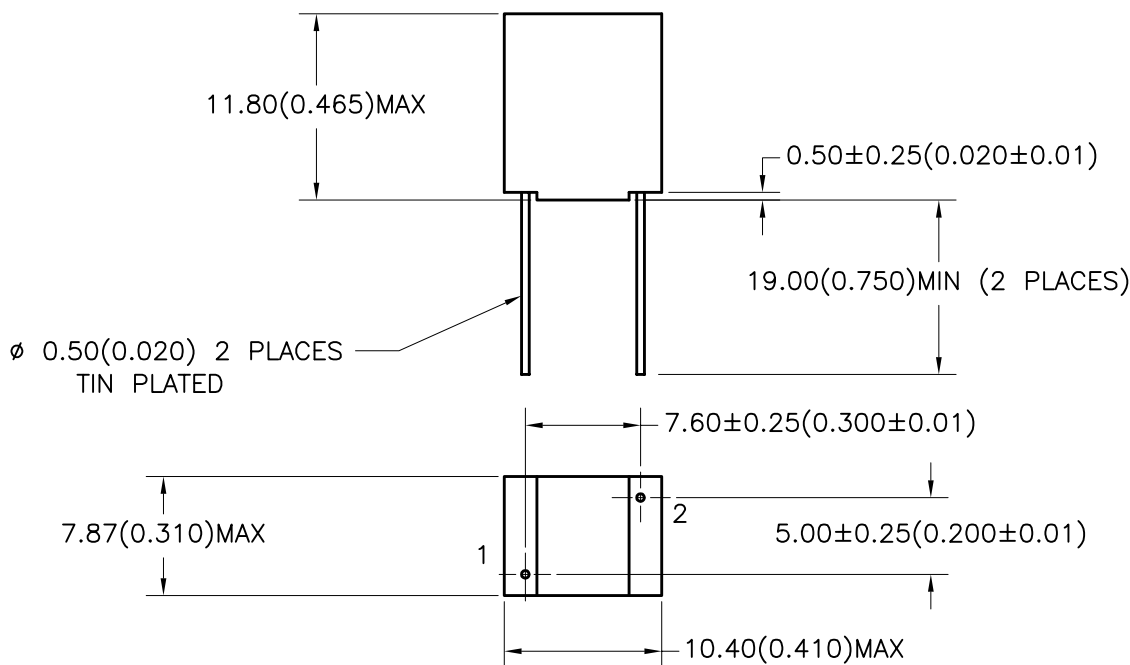

PREPARED BY:

K. BRENNAN

ENGINEER:
M. PITCHAI

DWG CONTROL NO.
P-A4-12445
ACAD\MXFMR\A4124451.DWG

REV
A

MINIATURE
ENCAPSULATED INDUCTOR

MEI-04

QUALITY CONTROL:

T. CLEM

CONTENTS OF THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT
PRIOR NOTICE

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(951) 699-1270 FAX 9516769482

MODEL SPECIFICATION

DIM: mm(In) SCL: 2/1 SH: 1 OF 1

APPROVED:

Y. SEKIGUCHI

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA
RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN
CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.