



Elite CT-59 Multi-Throw Internal Terminations DC-26.5GHz Latching

The CT-59 Switch is a Internally Terminated broadband, multi-throw, electromechanical coaxial switch designed to switch a microwave signal from a common input to any of 3, 4, 5, or 6 outputs. The characteristic impedance is 50 Ohms. Internal terminations provide an impedance match for the unselected ports. The switches are small using the popular connector spacing on a 1.062" dia. circle. Each position has an individual actuator mechanism allowing random position selection. This also minimizes switching time.

Specifications

RF Contacts: Break before make

Actuator

Voltage (VDC) 20°C	12	15	28
Latching Current (mA)	255	205	90
Reset Current (mA)	Positions		
		3	765 615 270
		4	1020 820 360
		5	1275 1025 450
		6	1530 1230 540

Switching Time: 20 msec max

Terminations: 50 Ohm 2 Watts CW max

Connectors: SMA (f)

Weight: 6 oz. max

Temperature Range: -55°C to +85°C (Operating)

The CT-59 comes with a latching actuator. The latching switch remains in the last position selected when the switch is de-energized. STD dual command requires a reset pulse before a new selected position. A separate reset circuit allows all positions to be set to an open position. User must provide both reset (clear) and set (select new position) commands.


Shock: MIL-STD-202 Method 213, Condition D (500G Non Operating)

Vibration: MIL-STD-202 Method 214, Condition D (10G RMS Non Operating)

Humidity: Moisture Seal Available

Typical Contact Life: 5 Million Cycles

RF Power Handling (Non-Terminated)


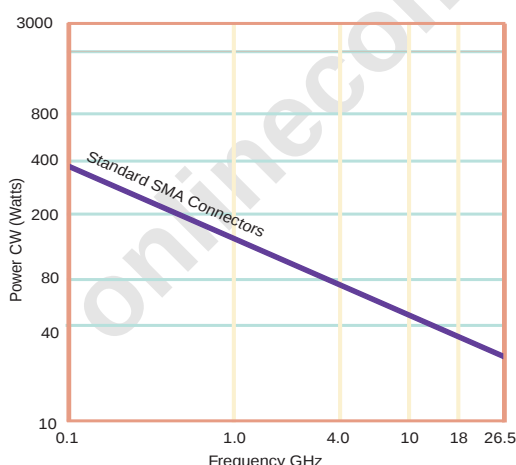


Specifications

VSWR (max)
Insertion Loss (min)
Isolation (max)

DC-6 GHz	6-12 GHz	12-18 GHz	18-26.5 GHz
1.25:1	1.40:1	1.50:1	1.80:1
0.20 dB	0.40 dB	0.50 dB	0.80 dB
70.0 dB	60.0 dB	60.0 dB	50.0 dB

Typical Performance

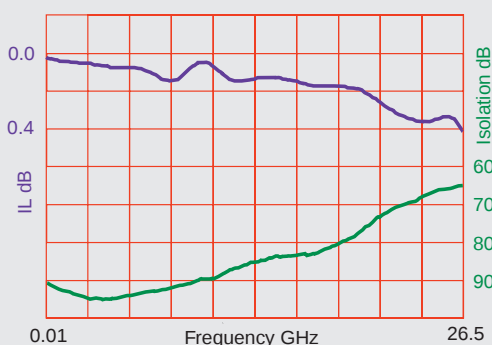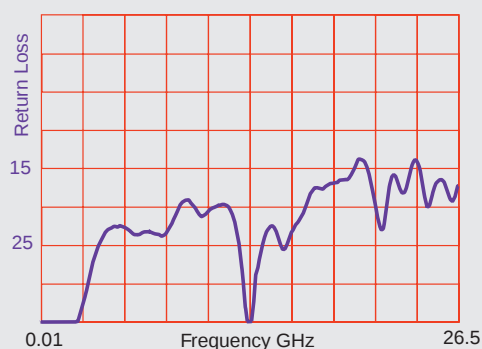






**TELEDYNE
COAX SWITCHES**

Specifications subject to change without notice.


www.teledynecoax.com
email: coax@teledyne.com

Tel: (800) 351-7368
10/2007


Elite CT-59 Multi-Throw Internal Terminations DC-26.5GHz Latching

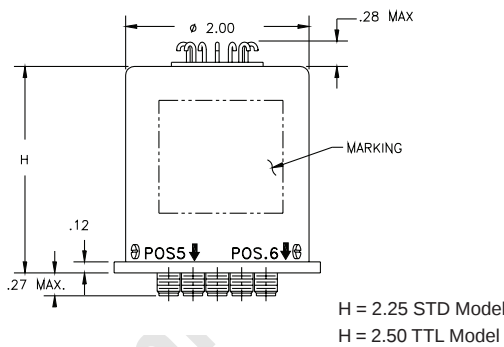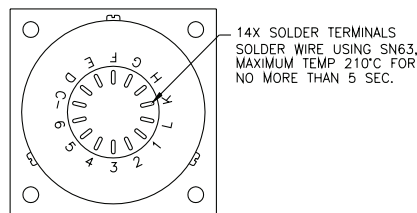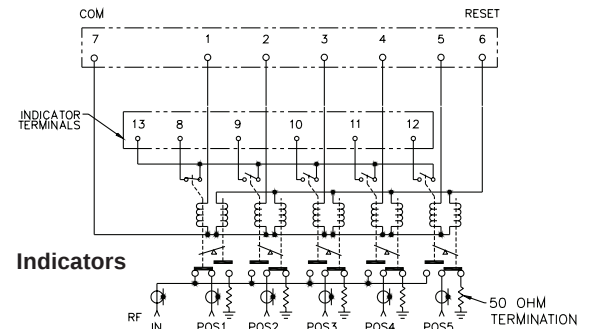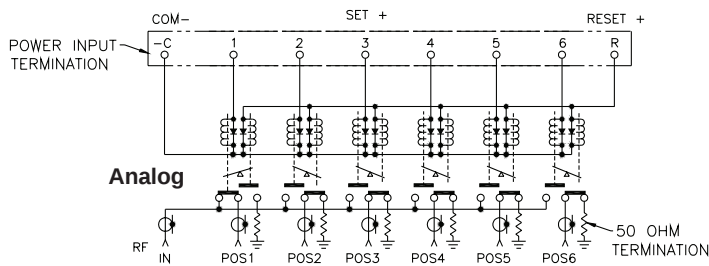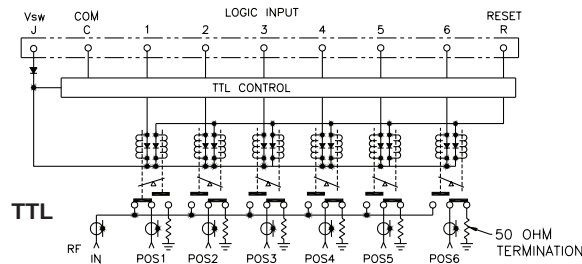


SP3T




SP5T

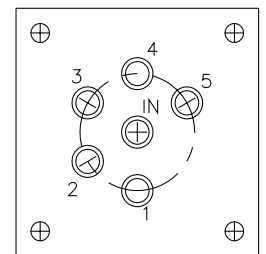


SP6T

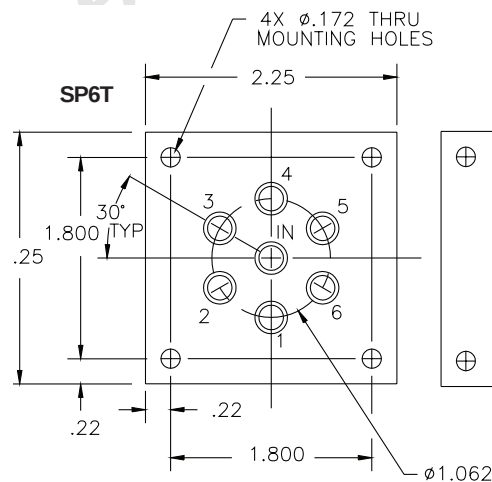

SP4T

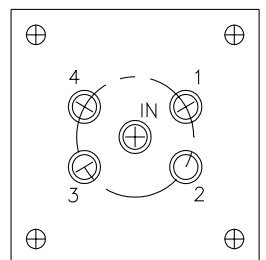

Part Numbering System for CT-59 (Latching)

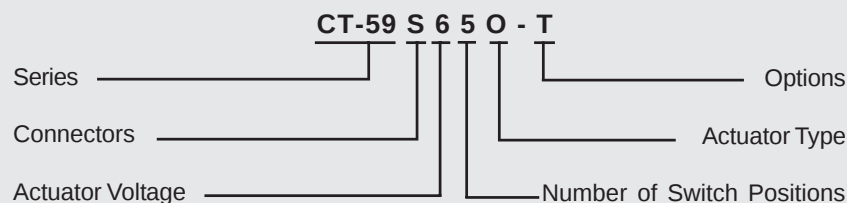

Connector
S: SMA Female

Actuator Voltage
6: 28Vdc Latching
7: 15Vdc Latching
8: 12Vdc Latching

Number of Positions
3: SP3T
4: SP4T
5: SP5T
6: SP6T

Actuator Type
O: No Indicator Contacts
C: Indicator Contacts
D: Self Cutoff Only
E: Indicators and Self Cutoff

Options
T: TTL Drivers with Diodes
R: Positive + Common
TD: TTL Driver with Decoder

For other options contact Factory



Specifications subject to change without notice.

www.teledynecoax.com
email: coax@teledyne.com

Tel: (800) 351-7368
10/2007