





MICRO Push-Wire Connectors for Junction Boxes




4 x 0.6 – 0.8 Ø mm "s" ** 100 V/1.5 kV/2 ① 6 A	4 x AWG 22 – 20 "sol." ** 125 V, 7 A ② 150 V, 7 A ③	8 x 0.6 – 0.8 Ø mm "s" ** 100 V/1.5 kV/2 ① 6 A	8 x AWG 22 – 20 "sol." ** 125 V, 7 A ② 150 V, 7 A ③	4 x 0.4 – 0.5 Ø mm "s" ** 100 V/1.5 kV/2 ① 6 A	4 x AWG 26 – 24 "solid"
5 – 6 mm / 0.22 in		5 – 6 mm / 0.22 in		5 – 6 mm / 0.22 in	
* ② VDE ③ ④ ⑤ CCA ⑥ ⑦		* ② VDE ③ ④ ⑤ CCA ⑥ ⑦		* CCA ⑥ ⑦	





Color	Item-No.	Pack.-unit pcs	Color	Item-No.	Pack.-unit pcs	Color	Item-No.	Pack.-unit pcs
MICRO push-wire connectors for junction boxes, 4-conductor connectors			MICRO push-wire connectors for junction boxes, 8-conductor connectors			MICRO push-wire connectors for junction boxes, 4-conductor connectors		
dark grey	243-204	1000 (10 x 100)	dark grey	243-208	500 (10 x 50)	transparent	243-144	1000 (10 x 100)
red	243-804	1000 (10 x 100)	red	243-808	500 (10 x 50)			

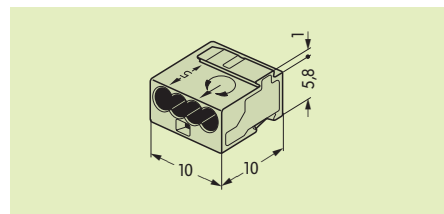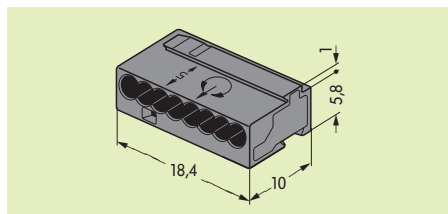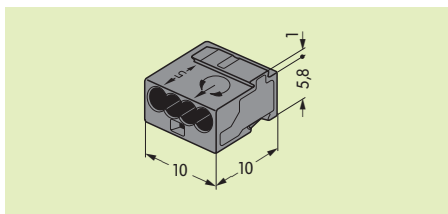

4 x 0.6 – 0.8 Ø mm "s" ** 100 V/1.5 kV/2 ① 6 A	4 x AWG 22 – 20 "sol." ** 125 V, 7 A ② 150 V, 7 A ③	8 x 0.6 – 0.8 Ø mm "s" ** 100 V/1.5 kV/2 ① 6 A	8 x AWG 22 – 20 "sol." ** 125 V, 7 A ② 150 V, 7 A ③	
5 – 6 mm / 0.22 in		5 – 6 mm / 0.22 in		
* ② VDE ③ ④ ⑤ CCA ⑥ ⑦		* ② VDE ③ ④ ⑤ CCA ⑥ ⑦		

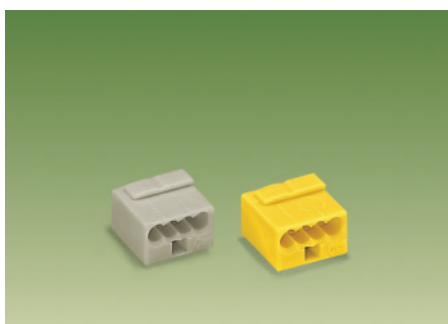

Color	Item-No.	Pack.-unit pcs	Color	Item-No.	Pack.-unit pcs	
MICRO push-wire connectors for junction boxes, 4-conductor connectors			MICRO push-wire connectors for junction boxes, 8-conductor connectors			
light grey	243-304	1000 (10 x 100)	light grey	243-308	500 (10 x 50)	
yellow	243-504	1000 (10 x 100)	yellow	243-508	500 (10 x 50)	

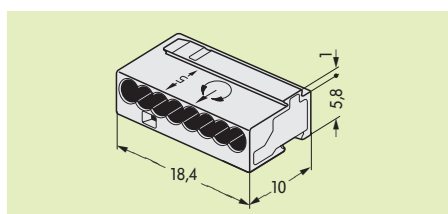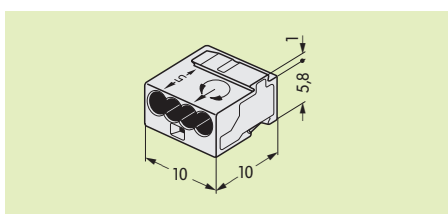

① 100 V = rated voltage
1.5 kV = rated surge voltage
2 = pollution degree
(see also section 10)

* For further approvals with corresponding ratings see pages 10.3 ff.

** When using wires of the same diameter only, 0.5 Ø mm/AWG 24 or 1.0 Ø mm/AWG 18 are also possible.