



**Data sheet | Item number: 750-403**  
4-channel digital input; 24 VDC; 0.2 ms

[www.wago.com/750-403](http://www.wago.com/750-403)

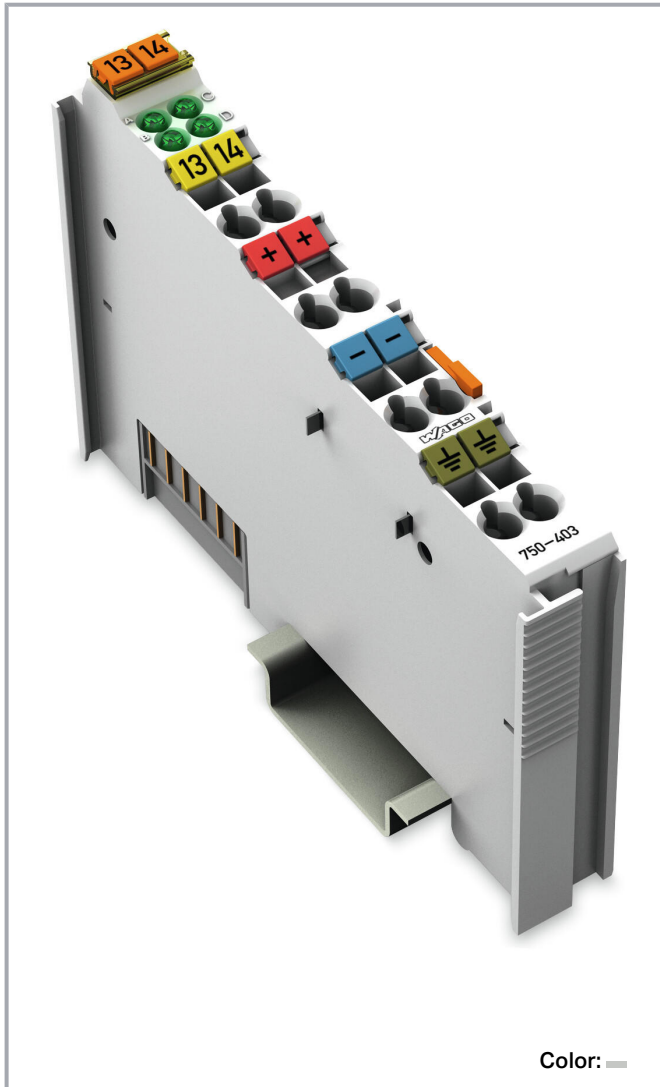



Color: —

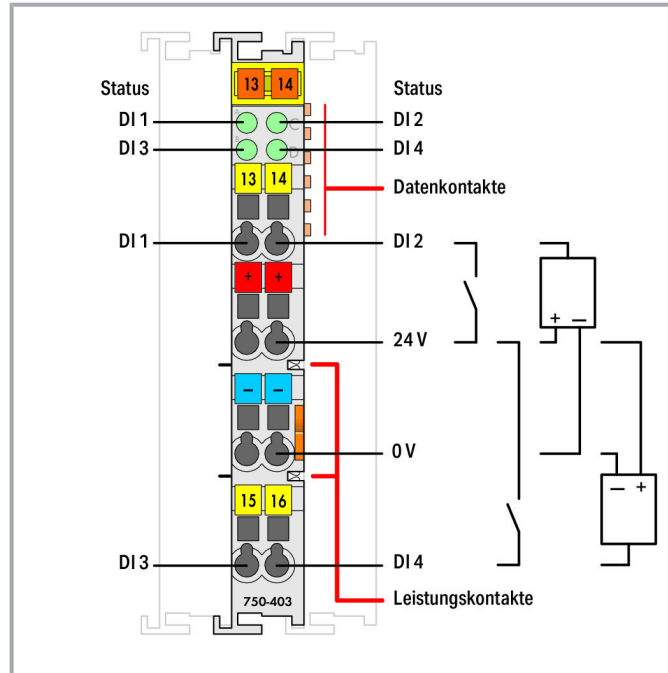

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

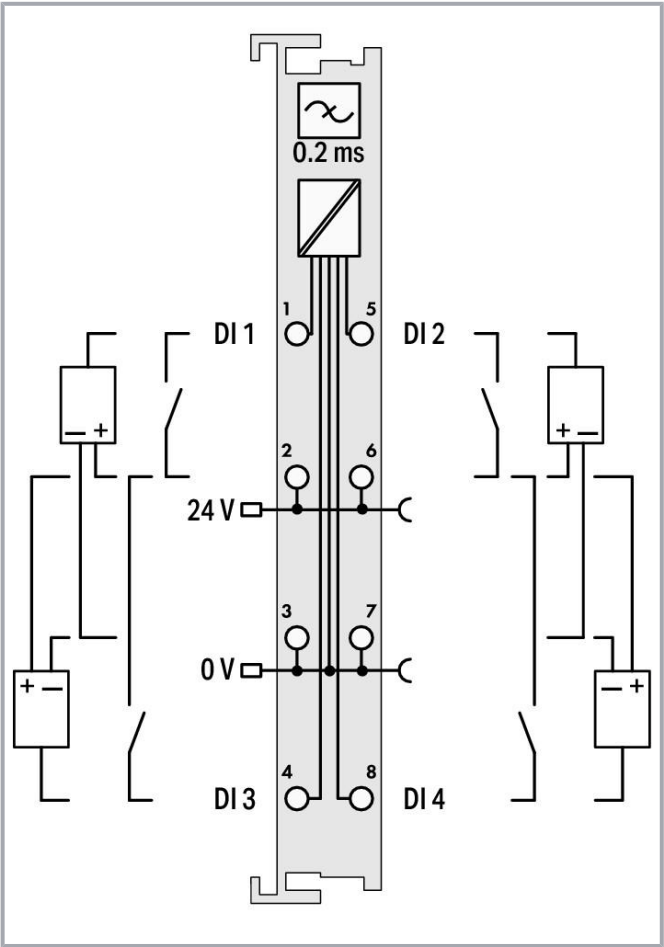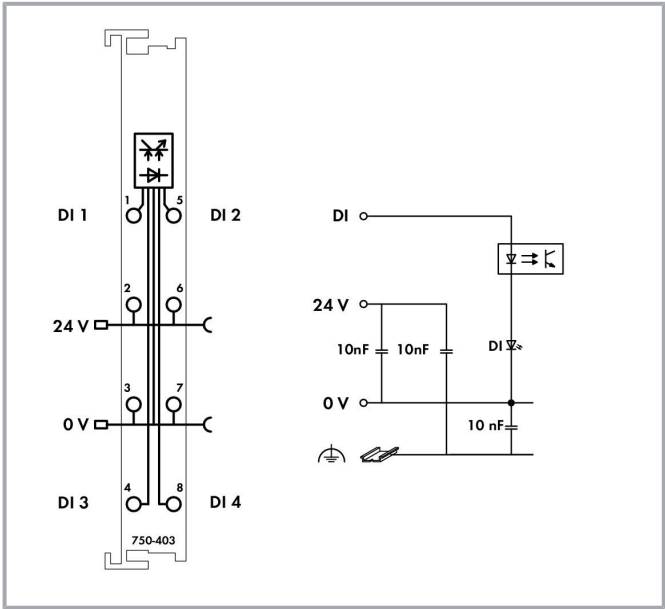

Item description

This digital input module receives control signals from field devices (e.g., sensors).

Each input module has a noise-rejection filter.

Field and system levels are electrically isolated.

Data

Technical data

|                                   |         |
|-----------------------------------|---------|
| Number of digital inputs          | 4       |
| Total number of channels (module) | 4       |
| Signal type                       | Voltage |
| Voltage signal type               | DC 24 V |
| Supply voltage (sensor)           | 24 VDC  |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



|                                                   |                                                                                                                           |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| Sensor connection                                 | 2 x (2-wire, 3-wire); A suitable field side connection module (e.g., 750-614) must also be used to connect other sensors. |
| Input characteristic                              | high-side switching                                                                                                       |
| Input filter (digital)                            | 0.2 ms                                                                                                                    |
| Input current per channel for signal (1) (typ.)   | 4.5 mA                                                                                                                    |
| Voltage range for signal (0)                      | -3 ... +5 VDC                                                                                                             |
| Voltage range for signal (1)                      | 15 ... 30 VDC                                                                                                             |
| Input data width (internal) (max.)                | 4 Bit                                                                                                                     |
| Supply voltage (system)                           | 5 VDC; via data contacts                                                                                                  |
| Power consumption (5 V system supply)             | 7.5 mA                                                                                                                    |
| Supply voltage (field)                            | 24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission via spring contact)       |
| Isolation                                         | 500 V system/field                                                                                                        |
| Indicators                                        | LED (A-D) green: Status DI 1 ... DI 4                                                                                     |
| Number of incoming power jumper contacts          | 2                                                                                                                         |
| Number of outgoing power jumper contacts          | 2                                                                                                                         |
| Current carrying capacity (power jumper contacts) | 10 A                                                                                                                      |

## Connection data

|                                       |                                  |
|---------------------------------------|----------------------------------|
| Connection technology: inputs/outputs | 8 x CAGE CLAMP®                  |
| Connection type (1)                   | Inputs/Outputs                   |
| Solid conductor                       | 0.08 ... 2.5 mm² / 28 ... 14 AWG |
| Fine-stranded conductor               | 0.08 ... 2.5 mm² / 28 ... 14 AWG |
| Strip length                          | 8 ... 9 mm / 0.31 ... 0.35 inch  |

## Physical data

|                                   |                      |
|-----------------------------------|----------------------|
| Width                             | 12 mm / 0.472 inch   |
| Height                            | 100 mm / 3.937 inch  |
| Depth                             | 69.8 mm / 2.748 inch |
| Depth from upper edge of DIN-rail | 62.6 mm / 2.465 inch |

## Mechanical data

|                  |             |
|------------------|-------------|
| Mounting type    | DIN-35 rail |
| Wiring interface | Fixed       |

## Material data

|       |            |
|-------|------------|
| Color | light gray |
|-------|------------|

Subject to changes. Please also observe the further product documentation!



|                    |                              |
|--------------------|------------------------------|
| Housing material   | Polycarbonate; polyamide 6.6 |
| Fire load          | 1.162 MJ                     |
| Weight             | 46.9 g                       |
| Conformity marking | CE                           |

## Environmental requirements


|                                                                                    |                                       |
|------------------------------------------------------------------------------------|---------------------------------------|
| Surrounding air temperature (operation)                                            | 0 ... 55 °C                           |
| Surrounding air temperature (storage)                                              | -40 ... 85 °C                         |
| Protection type                                                                    | IP20                                  |
| Pollution degree (5)                                                               | 2 per IEC 61131-2                     |
| Operating altitude                                                                 | 0 ... 2000 m                          |
| Mounting position                                                                  | horizontal (standing/lying); vertical |
| Relative humidity (without condensation)                                           | 95 %                                  |
| Vibration resistance                                                               | 4g per IEC 60068-2-6                  |
| Shock resistance                                                                   | 15g per IEC 60068-2-27                |
| EMC immunity to interference                                                       | per EN 61000-6-2, marine applications |
| EMC emission of interference                                                       | per EN 61000-6-4, marine applications |
| Exposure to pollutants                                                             | Per IEC 60068-2-42 and IEC 60068-2-43 |
| Permissible H <sub>2</sub> S contaminant concentration at a relative humidity 75 % | 10 ppm                                |
| Permissible SO <sub>2</sub> contaminant concentration at a relative humidity 75 %  | 25 ppm                                |

## Commercial data

|                       |                 |
|-----------------------|-----------------|
| Product Group         | 15 (Remote I/O) |
| Packaging type        | BOX             |
| Country of origin     | DE              |
| GTIN                  | 4045454424732   |
| Customs tariff number | 85389099990     |

## Approvals / Certificates

### Ex-Approvals

| Logo                                                                               | Approval                    | Additional Approval Text | Certificate name            |
|------------------------------------------------------------------------------------|-----------------------------|--------------------------|-----------------------------|
|  | ATEX<br>TUEV Nord Cert GmbH | EN 60079-0               | TÜV 07 ATEX<br>554086 X en. |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

|                                                                                                      |                                                                   |                |                                 |
|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|----------------|---------------------------------|
| <br>Ex nA IIC T4 Gc | <b>CCCEx</b><br>CQST/CNEx                                         | CNCA-C23-01    | 2020312310000215                |
|                      | <b>EAC</b><br>Brjansker Zertifizierungsstelle                     | TP TC 012/2011 | EAC RU C-DE.AM02.<br>B.00163/19 |
|                                                                                                      | <b>INMETRO</b><br>TÜV Rheinland do Brasil Ltda.                   | IEC 60079      | BR-Ex_TÜV 12.1297<br>X          |
|                      | <b>TUEV Nord</b><br>TUEV Nord Cert GmbH                           | IEC 60079-0    | IECEX TUN 09.0001<br>X          |
|                      | <b>UL</b><br>Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS) | UL 121201      | E198726 Sec.1                   |

## Country specific Approvals

| Logo                                                                               | Approval                                    | Additional Approval Text | Certificate name            |
|------------------------------------------------------------------------------------|---------------------------------------------|--------------------------|-----------------------------|
|  | <b>KC</b><br>National Radio Research Agency | Article 58-2, Clause 3   | MSIP-<br>REM-W43-<br>DIM750 |

## Ship Approvals

| Logo                                                                                | Approval                                                | Additional Approval Text | Certificate name |
|-------------------------------------------------------------------------------------|---------------------------------------------------------|--------------------------|------------------|
|   | <b>ABS</b><br>American Bureau of Shipping               | -                        | 19-<br>HG1821926 |
|  | <b>BV</b><br>Bureau Veritas S.A.                        | -                        | 13453/DO BV      |
|   | <b>DNV GL</b><br>Det Norske Veritas, Germanischer Lloyd | -                        | TAA0000194       |
|                                                                                     | <b>KR</b>                                               | -                        | KR               |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.



Korean Register of Shipping

HMB05880-  
AC001LR  
Lloyds Register

-

02/20026 (E6)

NK  
Nippon Kaiji Kyokai

-

TA17255M

PRS  
Polski Rejestr Statków

-

TE/2236  
/880590/19RINA  
RINA Germany GmbH

-

ELE066419XG

## UL-Approvals

| Logo                                                                               | Approval                                                     | Additional Approval Text | Certificate name |
|------------------------------------------------------------------------------------|--------------------------------------------------------------|--------------------------|------------------|
|  | UL<br>UL International Netherlands B.V. (ORDINARY LOCATIONS) | UL 508                   | E175199<br>Sec.1 |

## Optional accessories

## Supply module

|                                                                                    |                                                                     |                                                                |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------|----------------------------------------------------------------|
|  | Item no.: 750-601<br>Power Supply; 24 VDC; fuse holder              | <a href="http://www.wago.com/750-601">www.wago.com/750-601</a> |
|  | Item no.: 750-602<br>Power Supply; 24 VDC                           | <a href="http://www.wago.com/750-602">www.wago.com/750-602</a> |
|  | Item no.: 750-610<br>Power Supply; 24 VDC; fuse holder; Diagnostics | <a href="http://www.wago.com/750-610">www.wago.com/750-610</a> |
|  | Item no.: 750-612<br>Power Supply; 0 ... 230 V AC/DC                | <a href="http://www.wago.com/750-612">www.wago.com/750-612</a> |

## system box

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



|                                                                                   |                                                                                                                                          |                                                                                |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
|    | <b>Item no.: 850-804</b><br>IP65 enclosure; Stainless steel; WxHxD (400x123x200 mm); 4 x M20, 16 x M16, 28 x M12 cable grip              | <a href="http://www.wago.com/850-804">www.wago.com/850-804</a>                 |
|    | <b>Item no.: 850-804/000-001</b><br>IP65 enclosure; Stainless steel; WxHxD (400x123x200 mm); 2 x M20, 13 x M16, 32 x M12 cable grip      | <a href="http://www.wago.com/850-804/000-001">www.wago.com/850-804/000-001</a> |
|    | <b>Item no.: 850-805</b><br>IP65 enclosure; Stainless steel; WxHxD (600x123x200 mm); 4 x M20, 19 x M16, 67 x M12 cable grip              | <a href="http://www.wago.com/850-805">www.wago.com/850-805</a>                 |
|    | <b>Item no.: 850-814/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (200x120x200 mm); without flange plate                 | <a href="http://www.wago.com/850-814/002-000">www.wago.com/850-814/002-000</a> |
|    | <b>Item no.: 850-815/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (300x120x200 mm); without flange plate                 | <a href="http://www.wago.com/850-815/002-000">www.wago.com/850-815/002-000</a> |
|    | <b>Item no.: 850-816/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (400x120x200 mm); without flange plate                 | <a href="http://www.wago.com/850-816/002-000">www.wago.com/850-816/002-000</a> |
|    | <b>Item no.: 850-817/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (600x120x200 mm); without flange plate                 | <a href="http://www.wago.com/850-817/002-000">www.wago.com/850-817/002-000</a> |
|   | <b>Item no.: 850-825</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (160x100x160 mm); 9 x M12, 4 x M20                               | <a href="http://www.wago.com/850-825">www.wago.com/850-825</a>                 |
|  | <b>Item no.: 850-826</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip          | <a href="http://www.wago.com/850-826">www.wago.com/850-826</a>                 |
|  | <b>Item no.: 850-826/002-000</b><br>IP65 enclosure; Aluminium (RAL 7035); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip  | <a href="http://www.wago.com/850-826/002-000">www.wago.com/850-826/002-000</a> |
|  | <b>Item no.: 850-827</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip          | <a href="http://www.wago.com/850-827">www.wago.com/850-827</a>                 |
|  | <b>Item no.: 850-827/002-000</b><br>IP65 enclosure; Aluminium (RAL 7035); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip  | <a href="http://www.wago.com/850-827/002-000">www.wago.com/850-827/002-000</a> |
|  | <b>Item no.: 850-828</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip         | <a href="http://www.wago.com/850-828">www.wago.com/850-828</a>                 |
|  | <b>Item no.: 850-828/002-000</b><br>IP65 enclosure; Aluminium (RAL 7035); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip | <a href="http://www.wago.com/850-828/002-000">www.wago.com/850-828/002-000</a> |
|  | <b>Item no.: 850-834</b><br>IP65 enclosure; Polyester (RAL 7032); WxHxD (164x100x164 mm); 9 x M12, 4 x M20                               | <a href="http://www.wago.com/850-834">www.wago.com/850-834</a>                 |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

|                                                                                   |                                                                                                                                                      |                                                                |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
|    | <b>Item no.: 850-835</b><br>IP65 enclosure; Polyester (RAL 7032); WxHxD (244x100x164 mm); 4 x M20, 4 x M16, 14 x M12 cable grip                      | <a href="http://www.wago.com/850-835">www.wago.com/850-835</a> |
|    | <b>Item no.: 850-836</b><br>IP65 enclosure; Polyester (RAL 7032); WxHxD (324x100x164 mm); 4 x M20, 8 x M16, 17 x M12 cable grip                      | <a href="http://www.wago.com/850-836">www.wago.com/850-836</a> |
| <b>Carrier rail</b>                                                               |                                                                                                                                                      |                                                                |
|    | <b>Item no.: 210-112</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored | <a href="http://www.wago.com/210-112">www.wago.com/210-112</a> |
|    | <b>Item no.: 210-113</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored                  | <a href="http://www.wago.com/210-113">www.wago.com/210-113</a> |
|    | <b>Item no.: 210-114</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored                   | <a href="http://www.wago.com/210-114">www.wago.com/210-114</a> |
|    | <b>Item no.: 210-115</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored | <a href="http://www.wago.com/210-115">www.wago.com/210-115</a> |
|    | <b>Item no.: 210-118</b><br>Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored                 | <a href="http://www.wago.com/210-118">www.wago.com/210-118</a> |
|    | <b>Item no.: 210-196</b><br>Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored               | <a href="http://www.wago.com/210-196">www.wago.com/210-196</a> |
|  | <b>Item no.: 210-197</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored                     | <a href="http://www.wago.com/210-197">www.wago.com/210-197</a> |
|  | <b>Item no.: 210-198</b><br>Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored                | <a href="http://www.wago.com/210-198">www.wago.com/210-198</a> |
|  | <b>Item no.: 210-504</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored        | <a href="http://www.wago.com/210-504">www.wago.com/210-504</a> |
|  | <b>Item no.: 210-505</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored      | <a href="http://www.wago.com/210-505">www.wago.com/210-505</a> |
|  | <b>Item no.: 210-506</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored       | <a href="http://www.wago.com/210-506">www.wago.com/210-506</a> |
|  | <b>Item no.: 210-508</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored         | <a href="http://www.wago.com/210-508">www.wago.com/210-508</a> |
| <b>shield connection</b>                                                          |                                                                                                                                                      |                                                                |
|  | <b>Item no.: 790-108</b><br>Shield clamping saddle; 11 mm wide; diameter of compatible conductor; 3 ... 8 mm                                         | <a href="http://www.wago.com/790-108">www.wago.com/790-108</a> |
|  | <b>Item no.: 790-116</b><br>Shield clamping saddle; 19 mm wide; diameter of compatible conductor; 7 ... 16 mm                                        | <a href="http://www.wago.com/790-116">www.wago.com/790-116</a> |

Subject to changes. Please also observe the further product documentation!

**Item no.: 790-124**

Shield clamping saddle; 27 mm wide; diameter of compatible conductor; 6 ... 24 mm

[www.wago.com/790-124](http://www.wago.com/790-124)**Item no.: 790-140**

Shield clamping saddle; diameter of compatible conductor

[www.wago.com/790-140](http://www.wago.com/790-140)**Item no.: 790-208**

Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm

[www.wago.com/790-208](http://www.wago.com/790-208)**Item no.: 790-216**

Shield clamping saddle; 21.8 mm wide; 6 ... 16 mm

[www.wago.com/790-216](http://www.wago.com/790-216)**Item no.: 790-220**

Shield clamping saddle; 30 mm wide; 6 ... 20 mm

[www.wago.com/790-220](http://www.wago.com/790-220)**Marking accessories****Item no.: 2009-145**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/2009-145](http://www.wago.com/2009-145)**Item no.: 2009-145/000-002**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

[www.wago.com/2009-145/000-002](http://www.wago.com/2009-145/000-002)**Item no.: 2009-145/000-005**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red

[www.wago.com/2009-145/000-005](http://www.wago.com/2009-145/000-005)**Item no.: 2009-145/000-006**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue

[www.wago.com/2009-145/000-006](http://www.wago.com/2009-145/000-006)**Item no.: 2009-145/000-007**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray

[www.wago.com/2009-145/000-007](http://www.wago.com/2009-145/000-007)**Item no.: 2009-145/000-012**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange

[www.wago.com/2009-145/000-012](http://www.wago.com/2009-145/000-012)**Item no.: 2009-145/000-023**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

[www.wago.com/2009-145/000-023](http://www.wago.com/2009-145/000-023)**Item no.: 2009-145/000-024**

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

[www.wago.com/2009-145/000-024](http://www.wago.com/2009-145/000-024)**Item no.: 248-501**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

[www.wago.com/248-501](http://www.wago.com/248-501)**Item no.: 248-501/000-002**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow

[www.wago.com/248-501/000-002](http://www.wago.com/248-501/000-002)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



|                                                                                   |                                                                                                                       |                                                                                |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
|    | <b>Item no.: 248-501/000-005</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red         | <a href="http://www.wago.com/248-501/000-005">www.wago.com/248-501/000-005</a> |
|    | <b>Item no.: 248-501/000-006</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue        | <a href="http://www.wago.com/248-501/000-006">www.wago.com/248-501/000-006</a> |
|    | <b>Item no.: 248-501/000-007</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray        | <a href="http://www.wago.com/248-501/000-007">www.wago.com/248-501/000-007</a> |
|    | <b>Item no.: 248-501/000-012</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange      | <a href="http://www.wago.com/248-501/000-012">www.wago.com/248-501/000-012</a> |
|    | <b>Item no.: 248-501/000-017</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green | <a href="http://www.wago.com/248-501/000-017">www.wago.com/248-501/000-017</a> |
|    | <b>Item no.: 248-501/000-023</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green       | <a href="http://www.wago.com/248-501/000-023">www.wago.com/248-501/000-023</a> |
|    | <b>Item no.: 248-501/000-024</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet      | <a href="http://www.wago.com/248-501/000-024">www.wago.com/248-501/000-024</a> |
|  | <b>Item no.: 750-100</b><br>Marker card; as a DIN A4 sheet; plain                                                     | <a href="http://www.wago.com/750-100">www.wago.com/750-100</a>                 |
|  | <b>Item no.: 750-103</b><br>Group marker carrier                                                                      | <a href="http://www.wago.com/750-103">www.wago.com/750-103</a>                 |
|  | <b>Item no.: 750-106</b><br>Group marker carrier                                                                      | <a href="http://www.wago.com/750-106">www.wago.com/750-106</a>                 |
| <b>potential distribution</b>                                                     |                                                                                                                       |                                                                                |
|  | <b>Item no.: 750-614</b><br>Potential Distribution                                                                    | <a href="http://www.wago.com/750-614">www.wago.com/750-614</a>                 |

## Downloads

### Documentation

#### Manual

|                                                                                |                        |               |          |
|--------------------------------------------------------------------------------|------------------------|---------------|----------|
| 4-channel, 24VDC, 0.2ms<br>2- to 3-wire connection; high-side switching        | V 1.2.1                | pdf<br>1.6 MB | Download |
| System Manual WAGO I/O System 750 / 753<br>Decentralized Automation Technology | V 3.0.2<br>2021 Apr 27 | pdf<br>6.6 MB | Download |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Bid Text

|                        |             |                |          |
|------------------------|-------------|----------------|----------|
| 750-403<br>doc - Datei | 2017 Jul 12 | doc<br>26.1 kB | Download |
|------------------------|-------------|----------------|----------|

|                        |             |               |          |
|------------------------|-------------|---------------|----------|
| 750-403<br>X81 - Datei | 2019 Feb 19 | xml<br>3.9 kB | Download |
|------------------------|-------------|---------------|----------|

## System Description

|                                           |  |                 |          |
|-------------------------------------------|--|-----------------|----------|
| Overview on WAGO-I/O-SYSTEM 750 approvals |  | pdf<br>780.2 kB | Download |
|-------------------------------------------|--|-----------------|----------|

|                                                         |  |               |          |
|---------------------------------------------------------|--|---------------|----------|
| 750/753 Series I/O-System – General Product Information |  | pdf<br>1.7 MB | Download |
|---------------------------------------------------------|--|---------------|----------|

|                                                                                        |         |               |          |
|----------------------------------------------------------------------------------------|---------|---------------|----------|
| Use in Hazardous Environments<br>Term definition, marking and installation regulations | V 1.0.0 | pdf<br>1.0 MB | Download |
|----------------------------------------------------------------------------------------|---------|---------------|----------|

## Additional Information

|                                                          |         |                 |          |
|----------------------------------------------------------|---------|-----------------|----------|
| Disposal; Electrical and electronic equipment, Packaging | V 1.0.0 | pdf<br>265.8 kB | Download |
|----------------------------------------------------------|---------|-----------------|----------|

## CAD/CAE-Data

### CAE data

|                           |  |     |          |
|---------------------------|--|-----|----------|
| EPLAN Data Portal 750-403 |  | URL | Download |
|---------------------------|--|-----|----------|

|                        |  |     |          |
|------------------------|--|-----|----------|
| WSCAD Universe 750-403 |  | URL | Download |
|------------------------|--|-----|----------|

|                      |  |     |          |
|----------------------|--|-----|----------|
| ZUKEN Portal 750-403 |  | URL | Download |
|----------------------|--|-----|----------|

### CAD data

|                      |  |     |          |
|----------------------|--|-----|----------|
| 2D/3D Models 750-403 |  | URL | Download |
|----------------------|--|-----|----------|

## Device Files

### Device Driver

|                                                    |         |     |          |
|----------------------------------------------------|---------|-----|----------|
| WAGO USB Service Kabel Treiber / Serie 750 und 857 | 6.5.3.0 | zip | Download |
|----------------------------------------------------|---------|-----|----------|

Subject to changes. Please also observe the further product documentation!



## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 750-403  
4-channel digital input; 24 VDC; 0.2 ms

URL

Download

## Installation Notes

### Product family

**750/753 Series I/O System**

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.