


## Data sheet | Item number: 750-454

2-channel analog input; 4 ... 20 mA; Differential input; light gray

[www.wago.com/750-454](http://www.wago.com/750-454)

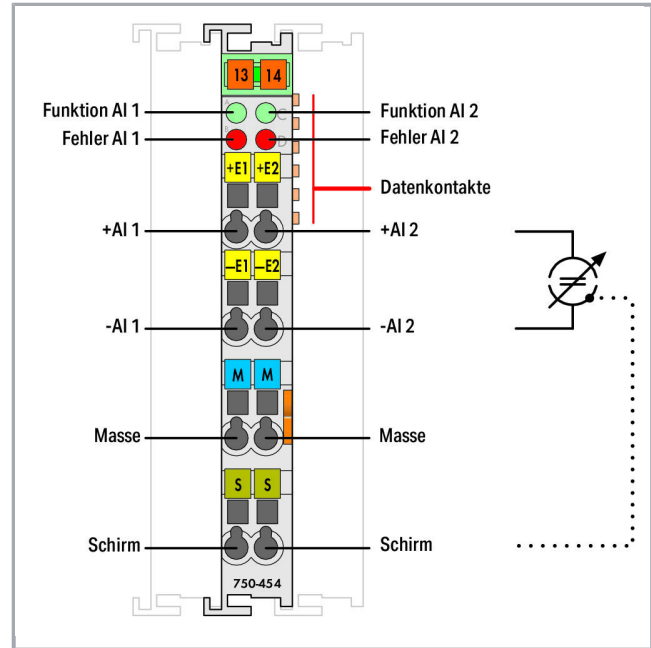

RoHS Compliant



[BOMcheck.net](https://www.bomcheck.net)

Color:

Subject to changes.

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

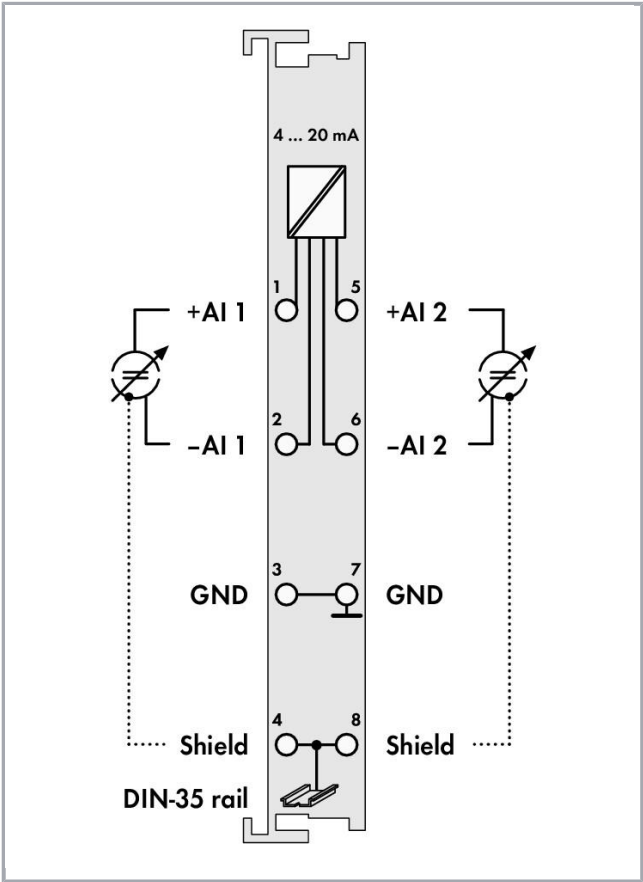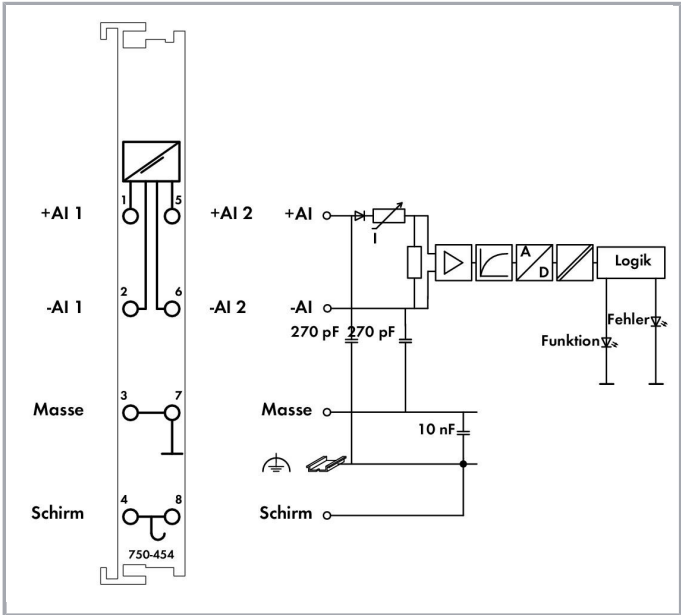

Item description

- The analog input module processes signals of a standard magnitude 4–20mA.
- The input signal is electrically isolated and is transmitted with a resolution of 12 bits.
- The internal system supply is used for the power supply of the module.
- The input channels are differential inputs.
- The shield (screen) is directly connected to the DIN rail.

Data  
Technical Data

|                                   |                |
|-----------------------------------|----------------|
| Number of analog inputs           | 2              |
| Total number of channels (module) | 2              |
| Type of signal                    | Current        |
| Type of signal current            | DC 4 ... 20 mA |

Subject to changes.

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



|                                                     |                                                      |
|-----------------------------------------------------|------------------------------------------------------|
| Sensor connection                                   | 2 x (2-conductor)                                    |
| Input voltage (max.)                                | 35 V                                                 |
| Signal characteristic                               | Differential                                         |
| Resolution [bit]                                    | 12 Bit                                               |
| Input resistance max.                               | 220 $\Omega$                                         |
| Bit width                                           | 2 x 16-bit data; 2 x 8-bit control/status (optional) |
| Conversion time (typ. $\leq$ )                      | 2 ms                                                 |
| Messfehler, Bezugstemperatur                        | 25 °C                                                |
| Messfehler, Abweichung max. vom Messbereichsendwert | 0.2 %                                                |
| Temperaturfehler max. vom Messbereichsendwert       | 0.01 %/K                                             |
| System supply voltage                               | DC 5 V; via data contacts                            |
| Current consumption, system supply (5 V)            | 70 mA                                                |
| Isolation                                           | 500 V system/supply                                  |

### Connection data

|                                    |                                              |
|------------------------------------|----------------------------------------------|
| Connection technology: In-/Outputs | 8 x CAGE CLAMP®                              |
| Connection type (1)                | Inputs/Outputs                               |
| Solid conductor                    | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Fine-stranded conductor            | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Strip length                       | 8 ... 9 mm / 0.31 ... 0.35 inch              |

### Geometrical Data

|                                       |                      |
|---------------------------------------|----------------------|
| Width                                 | 12 mm / 0.472 inch   |
| Height                                | 69.8 mm / 2.748 inch |
| Height from upper-edge of DIN-35 rail | 62.6 mm / 2.465 inch |
| Depth                                 | 100 mm / 3.937 inch  |

### Mechanical data

|                  |             |
|------------------|-------------|
| Type of mounting | DIN-35 rail |
|------------------|-------------|

### Material Data

|                    |                              |
|--------------------|------------------------------|
| Color              | light gray                   |
| Housing material   | Polycarbonate, polyamide 6.6 |
| Weight             | 49.8 g                       |
| Conformity marking | CE                           |

Subject to changes.

## Environmental Requirements


|                                                                                    |                                           |
|------------------------------------------------------------------------------------|-------------------------------------------|
| Surrounding air (operating) temperature                                            | 0 ... 55 °C                               |
| Surrounding air (storage) temperature                                              | -40 ... 85 °C                             |
| Protection class                                                                   | IP20                                      |
| Degree of pollution (5)                                                            | 2 per IEC 61131-2                         |
| Operating altitude                                                                 | 0 ... 2000 m                              |
| Mounting position                                                                  | horizontal (standing/lying) or vertical   |
| Relative air humidity (no condensation)                                            | 95 %                                      |
| Vibration resistance                                                               | 4g per IEC 60068-2-6                      |
| Shock resistance                                                                   | 15g per IEC 60068-2-27                    |
| EMC immunity to interference                                                       | acc. to EN 61000-6-2, marine applications |
| EMC emission of interference                                                       | acc. to EN 61000-6-4, marine applications |
| Exposure to pollutants                                                             | Per IEC 60068-2-42 and IEC 60068-2-43     |
| Permissible H <sub>2</sub> S contaminant concentration at a relative humidity 75 % | 10 ppm                                    |
| Permissible SO <sub>2</sub> contaminant concentration at a relative humidity 75 %  | 25 ppm                                    |

## Commercial data

|                    |                 |
|--------------------|-----------------|
| Product Group      | 15 (Remote I/O) |
| Packaging type     | BOX             |
| Country of origin  | DE              |
| GTIN               | 4045454483098   |
| Customs Tariff No. | 85389099990     |

## Approvals / Certificates

### Ex-Approvals

| Logo                                                                               | Approval                         | Additional Approval Text | Certificate name                  |
|------------------------------------------------------------------------------------|----------------------------------|--------------------------|-----------------------------------|
|  | ATEX<br>TUEV Nord Cert GmbH      | EN 60079-0               | TÜV 07<br>ATEX<br>554086 X<br>en. |
|  | TUEV Nord<br>TUEV Nord Cert GmbH | IEC 60079-0              | IECEx<br>TUN<br>09.0001 X         |

Subject to changes.

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

## Country specific Approvals

| Logo                                                                             | Approval                                    | Additional Approval Text | Certificate name            |
|----------------------------------------------------------------------------------|---------------------------------------------|--------------------------|-----------------------------|
|  | <b>KC</b><br>National Radio Research Agency | Article 58-2, Clause 3   | MSIP-<br>REM-W43-<br>AIM750 |

## Ship Approvals

| Logo                                                                                | Approval                                                | Additional Approval Text | Certificate name         |
|-------------------------------------------------------------------------------------|---------------------------------------------------------|--------------------------|--------------------------|
|     | <b>ABS</b><br>American Bureau of Shipping               | -                        | 19-<br>HG1821926         |
|    | <b>BV</b><br>Bureau Veritas S.A.                        | -                        | 13453/DO BV              |
|    | <b>DNV GL</b><br>Det Norske Veritas, Germanischer Lloyd | -                        | TAA0000194               |
|   | <b>KR</b><br>Korean Register of Shipping                | -                        | KR<br>HMB05880-<br>AC001 |
|  | <b>LR</b><br>Lloyds Register                            | -                        | 02/20026 (E6)            |
|   | <b>NK</b><br>Nippon Kaiji Kyokai                        | -                        | TA17255M                 |
|  | <b>PRS</b><br>Polski Rejestr Statków                    | -                        | TE/2236<br>/880590/19    |
|                                                                                     | <b>RINA</b><br>RINA Germany GmbH                        | -                        | ELE066419XG              |

Subject to changes.

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## UL-Approvals

| Logo                                                                             | Approval                                                     | Additional Approval Text | Certificate name |
|----------------------------------------------------------------------------------|--------------------------------------------------------------|--------------------------|------------------|
|  | UL<br>UL International Netherlands B.V. (ORDINARY LOCATIONS) | UL 508                   | E175199<br>Sec.1 |

## Compatible products

## Marking accessories

|                                                                                    |                                                                                                                                       |                                                                                  |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|    | <b>Item no.: 2009-145</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; white          | <a href="http://www.wago.com/2009-145">www.wago.com/2009-145</a>                 |
|  | <b>Item no.: 2009-145/000-002</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; yellow | <a href="http://www.wago.com/2009-145/000-002">www.wago.com/2009-145/000-002</a> |
|  | <b>Item no.: 2009-145/000-005</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; red    | <a href="http://www.wago.com/2009-145/000-005">www.wago.com/2009-145/000-005</a> |
|  | <b>Item no.: 2009-145/000-006</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; blue   | <a href="http://www.wago.com/2009-145/000-006">www.wago.com/2009-145/000-006</a> |
|  | <b>Item no.: 2009-145/000-007</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; gray   | <a href="http://www.wago.com/2009-145/000-007">www.wago.com/2009-145/000-007</a> |
|  | <b>Item no.: 2009-145/000-012</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; orange | <a href="http://www.wago.com/2009-145/000-012">www.wago.com/2009-145/000-012</a> |
|  | <b>Item no.: 2009-145/000-023</b><br>Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; green  | <a href="http://www.wago.com/2009-145/000-023">www.wago.com/2009-145/000-023</a> |

Subject to changes.

**Item no.: 2009-145/000-024**

Mini-WSB Inline; for Smart Printer; on reel; stretchable 5 - 5.2 mm; plain; snap-on type; violet

[www.wago.com/2009-145/000-024](http://www.wago.com/2009-145/000-024)**Item no.: 248-501**

Miniature WSB Quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card

[www.wago.com/248-501](http://www.wago.com/248-501)**Item no.: 248-501/000-002**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow

[www.wago.com/248-501/000-002](http://www.wago.com/248-501/000-002)**Item no.: 248-501/000-005**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red

[www.wago.com/248-501/000-005](http://www.wago.com/248-501/000-005)**Item no.: 248-501/000-006**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue

[www.wago.com/248-501/000-006](http://www.wago.com/248-501/000-006)**Item no.: 248-501/000-007**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray

[www.wago.com/248-501/000-007](http://www.wago.com/248-501/000-007)**Item no.: 248-501/000-012**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange

[www.wago.com/248-501/000-012](http://www.wago.com/248-501/000-012)**Item no.: 248-501/000-017**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green

[www.wago.com/248-501/000-017](http://www.wago.com/248-501/000-017)**Item no.: 248-501/000-023**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green

[www.wago.com/248-501/000-023](http://www.wago.com/248-501/000-023)**Item no.: 248-501/000-024**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet

[www.wago.com/248-501/000-024](http://www.wago.com/248-501/000-024)**Item no.: 750-100**

Marker card; as a DIN A4 sheet; plain; white

[www.wago.com/750-100](http://www.wago.com/750-100)**Item no.: 750-103**

Group marker carrier

[www.wago.com/750-103](http://www.wago.com/750-103)**Item no.: 750-106**

Group marker carrier

[www.wago.com/750-106](http://www.wago.com/750-106)**system box****Item no.: 850-804**

IP65 enclosure; Stainless steel; WxHxD (400x123x200 mm); 4 x M20, 16 x M16, 28 x M12 cable grip

[www.wago.com/850-804](http://www.wago.com/850-804)

Subject to changes.

WAGO Kontakttechnik GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

**Item no.: 850-804/000-001**

IP65 enclosure; Stainless steel; WxHxD (400x123x200 mm); 2 x M20, 13 x M16, 32 x M12 cable grip

[www.wago.com/850-804/000-001](http://www.wago.com/850-804/000-001)**Item no.: 850-805**

IP65 enclosure; Stainless steel; WxHxD (600x123x200 mm); 4 x M20, 19 x M16, 67 x M12 cable grip

[www.wago.com/850-805](http://www.wago.com/850-805)**Item no.: 850-814/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (200x120x200 mm); without flange plate

[www.wago.com/850-814/002-000](http://www.wago.com/850-814/002-000)**Item no.: 850-815/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (300x120x200 mm); without flange plate

[www.wago.com/850-815/002-000](http://www.wago.com/850-815/002-000)**Item no.: 850-816/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (400x120x200 mm); without flange plate

[www.wago.com/850-816/002-000](http://www.wago.com/850-816/002-000)**Item no.: 850-817/002-000**

IP65 enclosure; Sheet steel (RAL 7035); WxHxD (600x120x200 mm); without flange plate

[www.wago.com/850-817/002-000](http://www.wago.com/850-817/002-000)**Item no.: 850-825**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (160x100x160 mm); 9 x M12, 4 x M20

[www.wago.com/850-825](http://www.wago.com/850-825)**Item no.: 850-826**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip

[www.wago.com/850-826](http://www.wago.com/850-826)**Item no.: 850-826/002-000**

IP65 enclosure; Aluminium (RAL 7035); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip

[www.wago.com/850-826/002-000](http://www.wago.com/850-826/002-000)**Item no.: 850-827**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-827](http://www.wago.com/850-827)**Item no.: 850-827/002-000**

IP65 enclosure; Aluminium (RAL 7035); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-827/002-000](http://www.wago.com/850-827/002-000)**Item no.: 850-828**

IP65 enclosure; Aluminium (RAL 7032); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip

[www.wago.com/850-828](http://www.wago.com/850-828)**Item no.: 850-828/002-000**

IP65 enclosure; Aluminium (RAL 7035); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip

[www.wago.com/850-828/002-000](http://www.wago.com/850-828/002-000)**Item no.: 850-834**

IP65 enclosure; Polyester (RAL 7032); WxHxD (164x100x164 mm); 9 x M12, 4 x M20

[www.wago.com/850-834](http://www.wago.com/850-834)**Item no.: 850-835**

IP65 enclosure; Polyester (RAL 7032); WxHxD (244x100x164 mm); 4 x M20, 4 x M16, 14 x M12 cable

[www.wago.com/850-835](http://www.wago.com/850-835)

Subject to changes.

WAGO Kontakttechnik GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



grip

**Item no.: 850-836**

IP65 enclosure; Polyester (RAL 7032); WxHxD (324x100x164 mm); 4 x M20, 8 x M16, 17 x M12 cable grip

[www.wago.com/850-836](http://www.wago.com/850-836)**shield connection****Item no.: 790-108**

Shield clamping saddle; 11 mm wide; diameter of compatible conductor; 3 ... 8 mm

[www.wago.com/790-108](http://www.wago.com/790-108)**Item no.: 790-116**

Shield clamping saddle; 19 mm wide; diameter of compatible conductor; 7 ... 16 mm

[www.wago.com/790-116](http://www.wago.com/790-116)**Item no.: 790-124**

Shield clamping saddle; 27 mm wide; diameter of compatible conductor; 6 ... 24 mm

[www.wago.com/790-124](http://www.wago.com/790-124)**Item no.: 790-140**

Shield clamping saddle; diameter of compatible conductor

[www.wago.com/790-140](http://www.wago.com/790-140)**Item no.: 790-208**

Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm

[www.wago.com/790-208](http://www.wago.com/790-208)**Item no.: 790-216**

Shield clamping saddle; 21.8 mm wide; 6 ... 16 mm

[www.wago.com/790-216](http://www.wago.com/790-216)**Item no.: 790-220**

Shield clamping saddle; 30 mm wide; 6 ... 20 mm

[www.wago.com/790-220](http://www.wago.com/790-220)**Carrier rail****Item no.: 210-112**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm

[www.wago.com/210-112](http://www.wago.com/210-112)**Item no.: 210-113**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715

[www.wago.com/210-113](http://www.wago.com/210-113)**Item no.: 210-114**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715

[www.wago.com/210-114](http://www.wago.com/210-114)**Item no.: 210-115**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm

[www.wago.com/210-115](http://www.wago.com/210-115)**Item no.: 210-118**

Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715

[www.wago.com/210-118](http://www.wago.com/210-118)**Item no.: 210-196**

Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

[www.wago.com/210-196](http://www.wago.com/210-196)**Item no.: 210-197**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715

[www.wago.com/210-197](http://www.wago.com/210-197)**Item no.: 210-198**

Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored

[www.wago.com/210-198](http://www.wago.com/210-198)

Subject to changes.

WAGO Kontakttechnik GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

**Item no.: 210-504**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715

[www.wago.com/210-504](http://www.wago.com/210-504)**Item no.: 210-505**

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715

[www.wago.com/210-505](http://www.wago.com/210-505)**Item no.: 210-506**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715

[www.wago.com/210-506](http://www.wago.com/210-506)**Item no.: 210-508**

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715

[www.wago.com/210-508](http://www.wago.com/210-508)**Downloads****Documentation****Manual**

|                          |         |               |          |
|--------------------------|---------|---------------|----------|
| 2-channel, 4-20mA, diff. | V 1.2.0 | pdf<br>2.1 MB | Download |
|--------------------------|---------|---------------|----------|

**Bid Text**

|                        |              |               |          |
|------------------------|--------------|---------------|----------|
| 750-454<br>X81 - Datei | Feb 19, 2019 | xml<br>4.3 kB | Download |
|------------------------|--------------|---------------|----------|

|                        |              |                |          |
|------------------------|--------------|----------------|----------|
| 750-454<br>doc - Datei | Oct 17, 2017 | doc<br>29.2 kB | Download |
|------------------------|--------------|----------------|----------|

|                         |              |                 |          |
|-------------------------|--------------|-----------------|----------|
| 750-454<br>docx - Datei | Oct 17, 2017 | docx<br>17.2 kB | Download |
|-------------------------|--------------|-----------------|----------|

**Additional Information**

|                                                          |         |                 |          |
|----------------------------------------------------------|---------|-----------------|----------|
| Disposal; Electrical and electronic equipment, Packaging | V 1.0.0 | pdf<br>265.8 kB | Download |
|----------------------------------------------------------|---------|-----------------|----------|

**System Description**

|                                                                                        |         |               |          |
|----------------------------------------------------------------------------------------|---------|---------------|----------|
| Use in Hazardous Environments<br>Term definition, marking and installation regulations | V 1.0.0 | pdf<br>1.0 MB | Download |
|----------------------------------------------------------------------------------------|---------|---------------|----------|

|                                           |  |                 |          |
|-------------------------------------------|--|-----------------|----------|
| Overview on WAGO-I/O-SYSTEM 750 approvals |  | pdf<br>780.2 kB | Download |
|-------------------------------------------|--|-----------------|----------|

|                                                                                    |         |               |          |
|------------------------------------------------------------------------------------|---------|---------------|----------|
| Design Notes<br>Basic conditions and recommendations for higher operational safety | V 2.0.0 | pdf<br>1.5 MB | Download |
|------------------------------------------------------------------------------------|---------|---------------|----------|

750/753 Series I/O-System – General Product Information  
Subject to changes.

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



750/753 Series I/O System - General Product Information

pdf  
1.7 MB

[Download](#)

## CAD/CAE-Data

### CAD data

|                      |     |                          |
|----------------------|-----|--------------------------|
| 2D/3D Models 750-454 | URL | <a href="#">Download</a> |
|----------------------|-----|--------------------------|

### CAE data

|                           |                          |
|---------------------------|--------------------------|
| EPLAN Data Portal 750-454 | <a href="#">Download</a> |
|---------------------------|--------------------------|

|                        |                          |
|------------------------|--------------------------|
| WSCAD Universe 750-454 | <a href="#">Download</a> |
|------------------------|--------------------------|

## Device Files

### Device Driver

|                                                    |                         |               |                          |
|----------------------------------------------------|-------------------------|---------------|--------------------------|
| WAGO USB Service Kabel Treiber / Serie 750 und 857 | 6.5.3.0<br>Sep 10, 2014 | zip<br>4.8 MB | <a href="#">Download</a> |
|----------------------------------------------------|-------------------------|---------------|--------------------------|

## Installation Notes

## Product family

**750/753 Series – I/O System**  
[Show all products from the family](#)

Subject to changes.

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.